



AEM13920 Evaluation Kit User Guide

Description

The AEM13920 evaluation kit (EVK) is a printed circuit board (PCB) featuring all the required components to operate the AEM13920 integrated circuit (IC) in QFN 40-pin package.

The AEM13920 evaluation board allows users to test the e-peas IC and analyze its performances in a laboratory-like setting or in product mock-ups.

It allows easy connections to one or two energy harvesters (e.g. an indoor PV cell and an outdoor PV cell), an optional 5 V power source, a storage element and an application circuit. It also provides all the configuration accesses to set the device in any of the modes described in the datasheet. The control and status signals are available on standard pin headers or through an I²C bus communication, allowing users to over-ride preconfigured board settings through any I²C master device and evaluate the IC performances. Furthermore, the on-board USB-to-I²C converter and e-peas' "I²C Configuration Tool" simplify I²C communication.


The AEM13920 EVK is a plug and play, intuitive and efficient tool to optimize the AEM13920 configuration, allowing users to design a highly efficient subsystem for the desired target application. Component replacement and operating mode switching is convenient and easy.

More detailed information about AEM13920 features can be found in the datasheet.

Applications

Smart home	Industrial sensor
Smart building	Retail
Edge IoT	PC accessories

Appearance

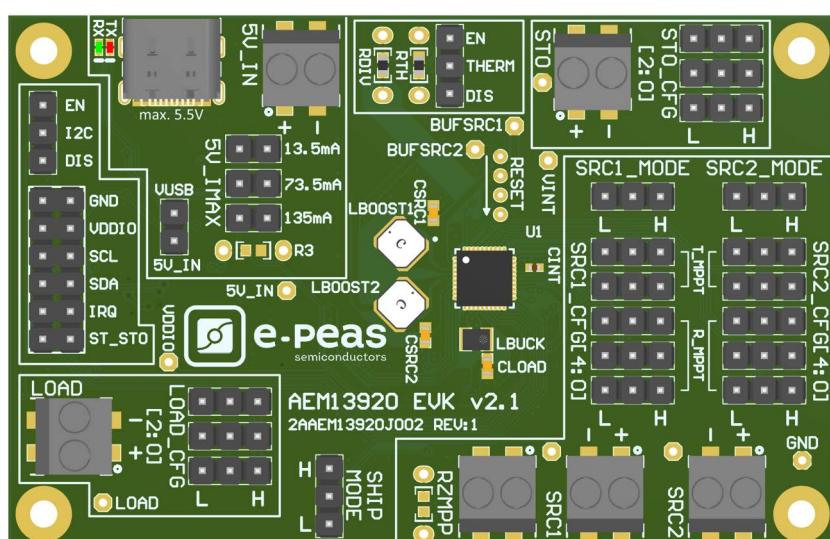

Features and Benefits

Two-way screw terminals

- Two DC sources of energy (SRCx).
- ZMPP configuration.
- Energy storage element (STO).
- Application circuit (LOAD).
- 5 V DC power input (5V_IN).

3-pin headers

- Sources voltage regulation configuration.
- Storage element protection thresholds configuration.
- Load voltage regulation configuration.
- I²C enable/disable.
- Thermal monitoring enable/disable.
- Shipping mode enable/disable.

2-pin headers

- 5 V power input max. current presets.

6-pin header

- I²C communication with application circuit.

USB connector

- 5 V DC power input (max. 5.5 V peak).
- Connection to the on-board USB to I²C converter.

Evaluation Kit Information

Part number	Dimensions
2AAEM13920J002 REV:1	76 mm x 49 mm

Device Information

Part Number	Package	Body size
10AEM13920J0001	QFN 40-pin	5 x 5 mm



1. EVK Connection Diagram

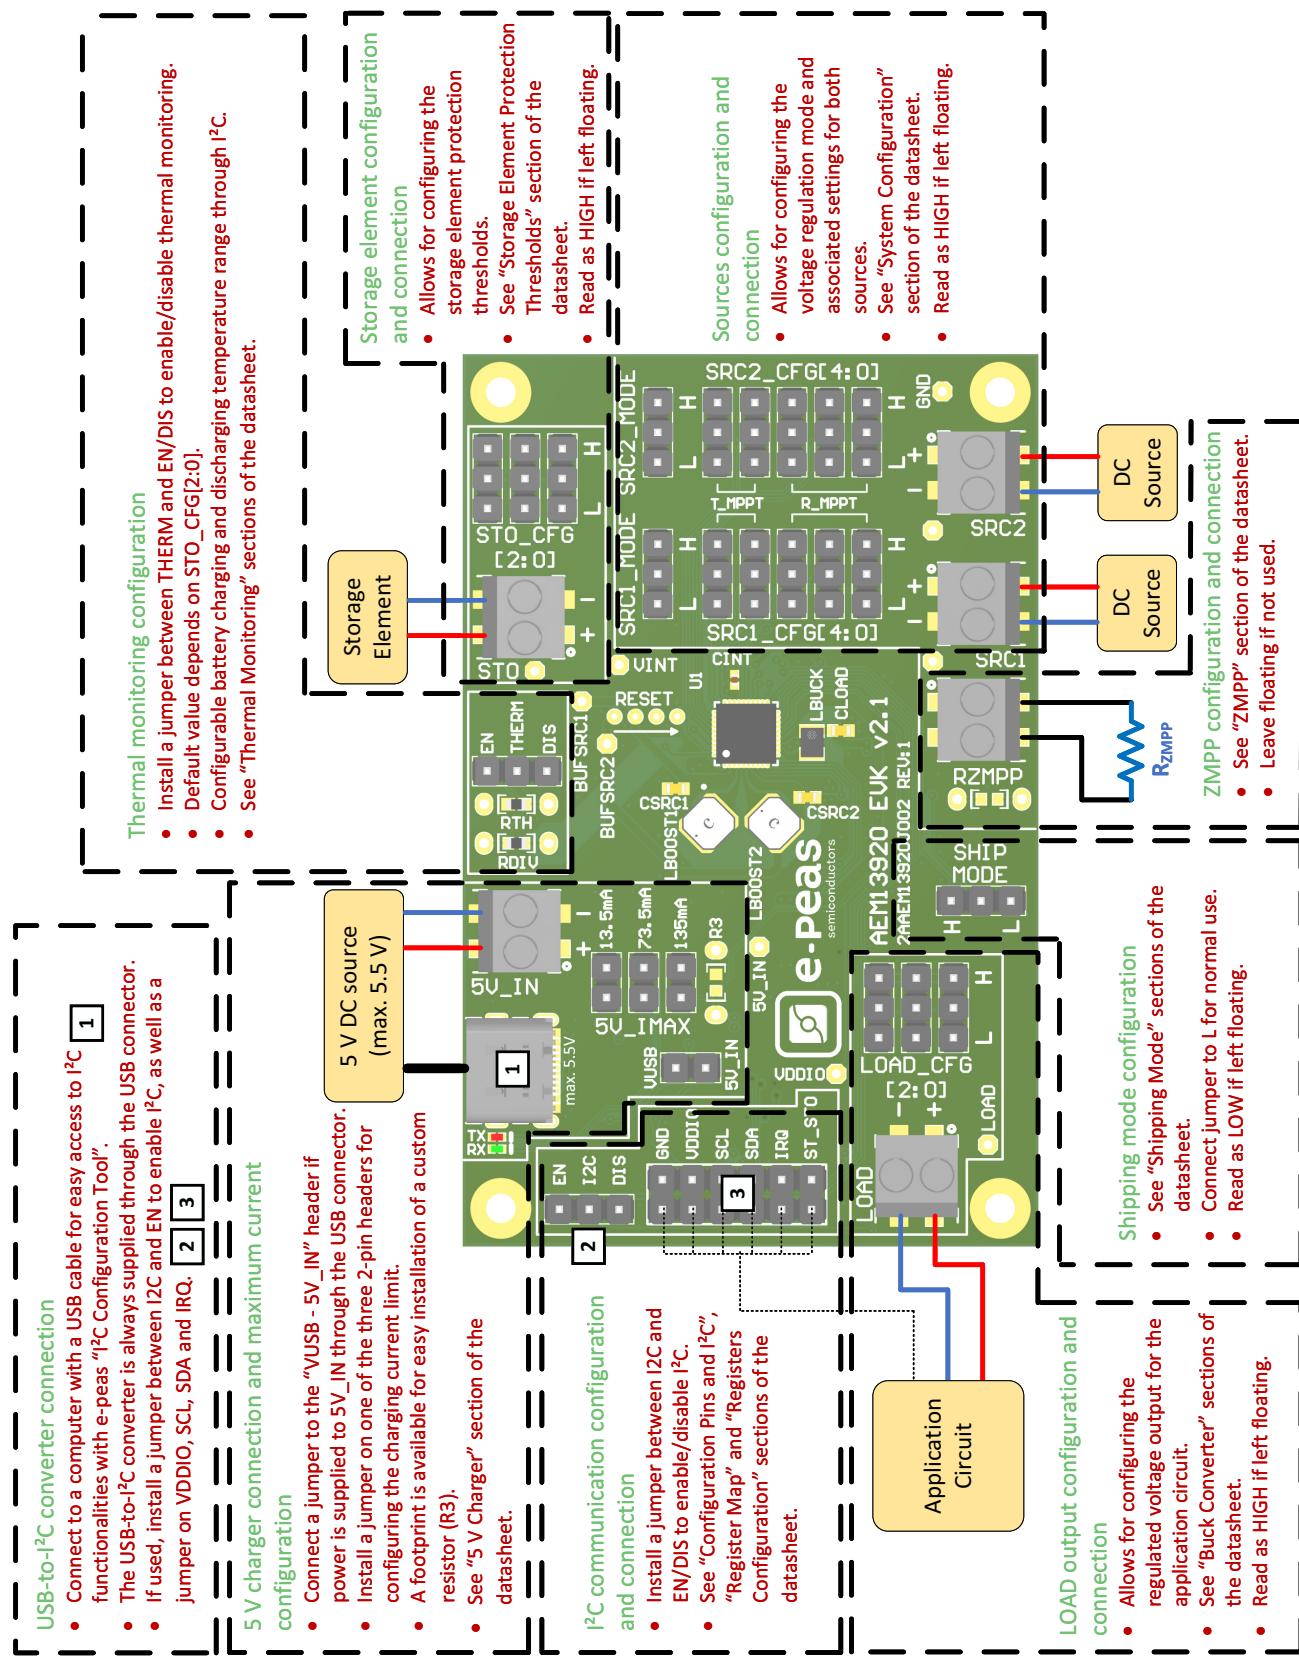


Figure 1: EVK connection diagram



2. Pin Configuration and Functions

NAME	FUNCTION	CONNECTION	
		If used	If not used
Power Pins			
SRC1 SRC2	Connection to the energy source harvested by the boost converter #1 and #2 respectively.	Connect the harvester(s).	Can be left floating or connected to GND.
ZMPP	Connection for R_{ZMPP} .	Connect R_{ZMPP} resistor.	Leave floating.
STO	Connection to the energy storage element (rechargeable battery or LiC).	Connect the storage element.	Leave floating. If left floating, storage element is on-board capacitor C_{STO} , which may be too small for most applications.
LOAD	Output voltage of the buck converter to supply an application circuit.	Connect the application circuit.	Disable buck converter through $LOAD_CFG[2:0]$ pins or BUCKCFG.VLOAD register field and leave the LOAD pin floating.
5V_IN	Input of the 5 V DC power supply.	Connect a 5 V DC power source.	Leave floating.
VDDIO	Voltage reference for the I ² C interface, as well as for the IRQ and ST_STO pins.	Connect to a external DC power supply and place a jumper between I ² C and EN.	Connect to GND by placing a jumper between VDDIO and GND in the communication header.
Control Pin			
SHIP_MODE	When HIGH: <ul style="list-style-type: none">Minimum consumption from the storage element.Storage element charge is disabled (Boost converters are disabled).Buck (LOAD) is disabled.Only VINT is charged if energy is available on SRC1 or SRC2.	Connect a jumper to H.	Connect a jumper to L or leave floating. Read as LOW if left floating.

Table 1: Signals description (part 1)



NAME	FUNCTION	CONNECTION	
		If used	If not used
Configuration Pins			
SRCx_MODE	Used to configure the SRCx voltage regulation strategy: - LOW: constant voltage mode. - HIGH: MPPT mode (ratio or ZMPP).	Connect jumper.	Read as HIGH if left floating.
SRCx_CFG[4:0]	Used to configure the SRCx regulation voltage. SRCx_MODE = LOW (constant voltage mode): - SRCx_CFG[4:0] are used to set SRCx constant regulation voltage. SRCx_MODE = HIGH (MPPT ratio mode): - SRCx_CFG[2:0] are used to set SRCx MPPT ratio. - SRCx_CFG[4:3] are used to set SRCx MPPT timings.	Connect jumpers.	Read as HIGH if left floating.
STO_CFG[2:0]	Used to configure the storage element protection thresholds.	Connect jumpers.	Read as HIGH if left floating.
LOAD_CFG[2:0]	Used to configure the LOAD output regulation voltage.	Connect jumpers.	Read as HIGH if left floating.
5V_IMAX	Connection to an external resistor to set the charging current from the 5V_IN supply to STO.	Connect jumper on one of the three 2-pin headers or place a resistor on R3.	Leave floating if 5V_IN is not used.
TH_MON	Connection for thermistor voltage divider mid-point, used to configure the thermal monitoring feature.	Connect jumper between THERM and EN.	Connect jumper between THERM and DIS.
I²C Pins			
SDA SCL	Serial data/clock for I ² C communication.	Pull-up to VDDIO by installing a jumper between I ² C and EN. Connect to I ² C master device.	Connect to GND by installing a jumper between I ² C and DIS.
Status Pin			
ST_STO	Logic output. - HIGH when in SUPPLY STATE or in SLEEP STATE. - LOW otherwise.	Connect to the application circuit. Works only if VDDIO is supplied. High logic level is VDDIO High logic level is STO.	Leave floating.
Various			
USB connector	Serves two purposes: - USB to I ² C converter: allows for connecting the EVK to a computer for easy access to I ² C functionalities with e-peas "I ² C Configuration Tool". - Supply the 5V_IN pin from USB. To do so, place a jumper on the "5V_IN-VUSB" header.	Connect a USB cable to a computer (I ² C or 5V_IN) or to a USB charger (5V_IN only).	Do not connect.

Table 1: Signals description (part 2)



3. General Considerations

3.1. Safety Information

Always perform the following steps in the correct order:

1. Reset the board by temporally connecting the “RESET” pads to GND, from top to bottom (as shown on PCB) silkscreen.
2. Completely configure the PCB (jumpers/resistors):
 - Sources regulation (SRCx_CFG[4:0] and SRCx_MODE).
 - Storage element protection thresholds (STO_CFG[2:0]).
 - Load output regulation voltage (LOAD_CFG[2:0]).
 - Thermal monitoring.
 - 5 V charger maximum current.
 - I²C enable/disable.
3. Connect a power supply on VDDIO if the I²C bus / IRQ pin / ST_STO pin are used.
4. Connect a storage element on the STO screw connector.
5. Connect the application circuit on the LOAD screw connector.
6. Connect at least one of the following:
 - The harvester(s) on the SRC(s) screw connector(s).
 - A 5 V power supply to the 5V_IN screw connector.
 - A USB charger or a computer to the USB connector with a jumper placed on the “5V_IN-VUSB” header.

3.2. AEM13920 Reset

The following procedure must be followed to properly reset the AEM13920:

- Connect a wire to GND.
- Use it to short the “RESET” pads to GND from top to bottom, as indicated on the EVK silkscreen.



3.3. Basic Configurations

3.3.1. Source Configuration

3.3.1.1. Constant Voltage Mode (SRCx_MODE = L)

Configuration pins					Voltage [V]
SRCx_CFG[4:0]					$V_{SRCx,REG}$
L	L	L	L	L	0.14
L	L	L	L	H	0.30
L	L	L	H	L	0.36
L	L	L	H	H	0.42
L	L	H	L	L	0.48
L	L	H	L	H	0.51
L	L	H	H	L	0.53
L	L	H	H	H	0.54
L	H	L	L	L	0.56
L	H	L	L	H	0.57
L	H	L	H	L	0.60
L	H	L	H	H	0.66
L	H	H	L	L	0.72
L	H	H	L	H	0.74
L	H	H	H	L	0.75
L	H	H	H	H	0.77

Configuration pins					Voltage [V]
SRCx_CFG[4:0]					$V_{SRCx,REG}$
H	L	L	L	L	0.78
H	L	L	L	H	0.81
H	L	L	H	L	0.87
H	L	L	H	H	0.93
H	L	H	L	L	0.99
H	L	H	L	H	1.10
H	L	H	H	L	1.20
H	L	H	H	H	1.31
H	H	L	L	L	1.40
H	H	L	L	H	1.50
H	H	L	H	L	1.61
H	H	L	H	H	1.70
H	H	H	L	L	1.79
H	H	H	L	H	1.90
H	H	H	H	L	1.99
H	H	H	H	H	2.10

Table 2: Source constant regulation voltage configuration with SRCx_CFG[4:0] pins

3.3.1.2. MPPT Ratio Mode (SRCx_MODE = H)

Configuration pins			MPPT ratio [%]
SRCx_CFG[2:0]			R_{MPPT}
L	L	L	35 %
L	L	H	50 %
L	H	L	65 %
L	H	H	70 %
H	L	L	75 %
H	L	H	80 %
H	H	L	85 %
H	H	H	ZMPP (SRC1) 100 % (SRC2)

Configuration pins		MPPT wait time [ms]	MPPT period [ms]
SRCx_CFG[4:3]		$T_{MPPT, WAIT}$ ¹	$T_{MPPT, PERIOD}$
L	L	1.8	116 ²
L	H	7.3	465
H	L	29	1862
H	H	233	14895

Table 3: MPPT ratio and timings configuration with SRCx_CFG[4:0] pins

1. The total time spent in open-circuit is the sum of $T_{MPPT, WAIT}$ (configurable, see table above) and $T_{MPPT, MEASURE}$ (fixed, see "Electrical Characteristics" table in the datasheet).

2. If $T_{MPPT, PERIOD}$ is set to 116 ms for any of the two SRCx, the APM WINDOW will automatically be set to 116 ms by the AEM13920 for the two boost converters, the buck converter, and the 5 V charger APM modules.



3.3.2. Storage Element Configuration

The **STO_CFG[2:0]** pins are used to configure the storage element protection thresholds (V_{OVDIS} , V_{CHRDY} and V_{OVCH}) and the temperature thresholds (TEMPCOLDCH, TEMPOTCH, TEMPCOLDDIS and TEMPOTDIS). See tables below.

Configuration pins			Overdischarge voltage [V]	Charge ready voltage [V]	Overcharge voltage [V]	Storage element type
STO_CFG[2:0]			V_{OVDIS}	V_{CHRDY}	V_{OVCH}	
L	L	L	2.51	2.61	3.79	Lithium-ion Super Capacitor (LiC)
L	L	H	2.51	2.61	3.49	Lithium-ion Super Capacitor 85 °C (LiC)
L	H	L	3.00	3.21	4.13	Lithium-ion
L	H	H	3.00	3.21	3.90	Lithium-ion (long life)
H	L	L	3.51	3.60	3.90	Lithium-ion (super long life)
H	L	H	3.00	3.30	4.13	Lithium Polymer (LiPo)
H	H	L	2.81	3.11	3.62	Lithium Iron Phosphate (LiFePO4)
H	H	H	2.61	2.70	3.90	Tadiran HLC1020

Table 4: Storage element configuration with STO_CFG[2:0] pins

Configuration pins			Minimum charging temperature [°C]	Maximum charging temperature [°C]	Minimum discharging temperature [°C]	Maximum discharging temperature [°C]	Storage element type
STO_CFG[2:0]			TEMPCOLDCH	TEMPOTCH	TEMPCOLDDIS	TEMPOTDIS	
L	L	L	-15	60	-15	60	Lithium-ion Super Capacitor (LiC)
L	L	H	-25	85	-25	85	Lithium-ion Super Capacitor 85 °C (LiC)
L	H	L	0	45	0	45	Lithium-ion
L	H	H	0	45	0	45	Lithium-ion (long life)
H	L	L	0	45	0	45	Lithium-ion (super long life)
H	L	H	0	45	0	45	Lithium Polymer (LiPo)
H	H	L	0	45	0	45	Lithium Iron Phosphate (LiFePO4)
H	H	H	-40	85	-40	85	Tadiran HLC1020

Table 5: Default temperature thresholds depending on STO_CFG[2:0] configuration with the recommended RDIV and RTH

DISCLAIMER: Storage element protection thresholds and temperature thresholds provided for each storage element type in the table above are indicative to support a wide range of storage element variants. They are provided as is to the best knowledge of e-peas's application laboratory. They should not replace the actual values provided in the storage element manufacturer's specifications and datasheet.



3.3.3. Load Configuration

Configuration pins			LOAD voltage [V]
LOAD_CFG[2:0]			V_{LOAD}
L	L	L	Buck disabled
L	L	H	0.6
L	H	L	0.9
L	H	H	1.2
H	L	L	1.5
H	L	H	1.8
H	H	L	2.2
H	H	H	2.5 ¹

Table 6: LOAD voltage configuration with LOAD_CFG[2:0] pins

1. This configuration is only available if $V_{OVDIS} \geq 2.5\text{ V}$.

3.3.4. 5 V Charger Configuration

Resistor [Ω]	Maximum charging current [mA]
R_{5V_IMAX}	$I_{5V,CC}$
370	135.0
680	73.5
1500	33.3 ¹
3700	13.5

Table 7: Typical resistor values for setting 5 V charger max. current

1. Could be obtained by installing a $1.5\text{ k}\Omega$ resistor on R3 and leaving all 3 headers open.

Three 2-pin headers corresponding to three current presets are available on the EVK. Install a jumper on the corresponding header to enable a preset.

Furthermore, R3 allows users for an easy installation of a custom resistor, either in through-hole or in SMD 0603 package. In that case, do not install any jumper on the three preset headers and install a resistor on R3 footprint.



3.4. I²C Configuration

3.4.1. I²C Communication

The device address on the I²C bus is 0x41. All information about the I²C communication is available in the AEM13920 datasheet “System Configuration” Section.

VDDIO must be connected to an external power supply which voltage is within the 1.5 V to 5.0 V range. On the evaluation board, 1 kΩ pull-up resistors on **SDA** and **SCL** (RSDA and RSCL) to **VDDIO** are provided.

In case the AEM13920 configurations are set by I²C communication, the configuration pins will not be taken into account anymore (except the **SHIP_MODE** pin).

The AEM13920 evaluation board provides a 12-pin, 2x6 header that supports two methods for accessing the I²C interface:

- Direct I²C access: The left row of the header (closest to the board edge) is directly connected to the AEM13920 I²C signals (**VDDIO**, **SCL**, **SDA**, and **IRQ**).
- On-board USB-to-I²C converter: The right row of the header is connected to the integrated USB-to-I²C converter on the evaluation board. To communicate with the AEM13920 through USB, four jumpers must be installed, each linking the corresponding left-side pin to right-side pin for **VDDIO**, **SCL**, **SDA**, and **IRQ**. See Section 3.4.2.

3.4.2. USB to I²C Converter

The AEM13920 has an on-board USB-to-I²C converter. When a computer is connected to the USB connector and the four jumpers for **VDDIO**, **SCL**, **SDA**, and **IRQ** are placed, it is recognized as a serial (COM) port, and is intended for use with e-peas “I²C Configuration Tool”, which can be downloaded from e-peas website, along with all necessary information about how to use it.

3.4.3. Register Map

All the register descriptions are provided in the AEM13920 datasheet.

Address	Name	Bit	Field Name	Access	Reset	Description
0x00	VERSION	[7:0]	VERSION	R	-	AEM13920 version number.
0x01	SRC1REGU0	[0:0]	MODE	R/W	0x01	SRC1 regulation mode.
		[3:1]	CFG0	R/W	0x00	SRC1 regulation mechanism configuration.
0x02	SRC1REGU1	[2:0]	CFG1	R/W	0x00	
		[5:3]	CFG2	R/W	0x00	
0x03	SRC2REGU0	[0:0]	MODE	R/W	0x01	SRC2 regulation mode.
		[3:1]	CFG0	R/W	0x00	SRC2 regulation mechanism configuration.
0x04	SRC2REGU1	[2:0]	CFG1	R/W	0x00	
		[5:3]	CFG2	R/W	0x00	
0x05	VOVDIS	[5:0]	THRESH	R/W	0x06	Storage element overdischarge threshold.
0x06	VCHRDY	[6:0]	THRESH	R/W	0x05	Storage element charge ready threshold.
0x07	VOVCH	[6:0]	THRESH	R/W	0x3A	Storage element overcharge threshold.
0x08	BST1CFG	[0:0]	EN	R/W	0x01	Boost SRC1 enable.
		[1:1]	HPEN	R/W	0x01	Boost SRC1 high-power mode enable.
		[4:2]	TMULT	R/W	0x01	Boost SRC1 current configuration.

Table 8: Register map (part 1)



Address	Name	Bit	Field Name	Access	Reset	Description
0x09	BST2CFG	[0:0]	EN	R/W	0x01	Boost SRC2 enable.
		[1:1]	HPEN	R/W	0x01	Boost SRC2 high-power mode enable.
		[4:2]	TMULT	R/W	0x01	Boost SRC2 current configuration.
0x0A	BUCKCFG	[2:0]	VLOAD	R/W	0x00	Buck output voltage configuration.
		[5:3]	TMULT	R/W	0x03	Buck current configuration.
0x0B	TEMPCOLDCH	[7:0]	THRESH	R/W	0xD1	Cold temperature threshold for storage element charging.
0x0C	TEMPHOTCH	[7:0]	THRESH	R/W	0x18	Hot temperature threshold for storage element charging.
0x0D	TEMPCOLDDIS	[7:0]	THRESH	R/W	0xD1	Cold temperature threshold for storage element discharging.
0x0E	TEMPHOTDIS	[7:0]	THRESH	R/W	0x18	Hot temperature threshold for storage element discharging.
0x0F	TEMPPROTECT	[0:0]	EN	R/W	0x01	Thermal protection enable.
0x10	SRCLOW	[2:0]	SRC1THRESH	R/W	0x00	V_{SRCLOW} threshold for SRC1 .
		[5:3]	SRC2THRESH	R/W	0x00	V_{SRCLOW} threshold for SRC2 .
0x11	APM	[0:0]	SRC1EN	R/W	0x00	APM SRC1 enable.
		[1:1]	SRC2EN	R/W	0x00	APM SRC2 enable.
		[2:2]	LOADEN	R/W	0x00	APM LOAD enable.
		[3:3]	MODE	R/W	0x00	APM mode.
		[4:4]	WINDOW	R/W	0x00	APM window.
		[5:5]	CHG5VEN	R/W	0x00	APM 5 V charger enable.
0x12	IRQENO	[0:0]	I2CRDY	R/W	0x01	IRQ serial interface ready enable.
		[1:1]	VOVDIS	R/W	0x00	IRQ VOVDIS enable.
		[2:2]	VCHRDY	R/W	0x00	IRQ VCHRDY enable.
		[3:3]	VOVCH	R/W	0x00	IRQ VOVCH enable.
		[4:4]	SRCLOW	R/W	0x00	IRQ source low threshold (SRCx) enable.
		[5:5]	TEMPCH	R/W	0x00	IRQ temperature (charge) enable.
		[6:6]	TEMPDIS	R/W	0x00	IRQ temperature (discharge) enable.
		[7:7]	CHG5VCONN	R/W	0x00	IRQ 5 V charger connected enable.
0x13	IRQEN1	[0:0]	SRC1MPPTSTART	R/W	0x00	IRQ MPPT start (SRC1) enable.
		[1:1]	SRC1MPPTDONE	R/W	0x00	IRQ MPPT done (SRC1) enable.
		[2:2]	SRC2MPPTSTART	R/W	0x00	IRQ MPPT start (SRC2) enable.
		[3:3]	SRC2MPPTDONE	R/W	0x00	IRQ MPPT done (SRC2) enable.
		[4:4]	STODONE	R/W	0x00	IRQ STO measurement done enable.
		[5:5]	TEMPDONE	R/W	0x00	IRQ temperature measurement done enable.
		[6:6]	APMDONE	R/W	0x00	IRQ APM done enable.
		[7:7]	APMERR	R/W	0x00	IRQ APM error enable.
0x14	CTRL	[0:0]	UPDATE	R/W	0x00	LOAD I ² C registers configuration.
		[1:1]	-	R	-	Reserved.
		[2:2]	SYNCBUSY	R	0x00	Synchronization busy flag.

Table 8: Register map (part 2)



Address	Name	Bit	Field Name	Access	Reset	Description
0x15	IRQFLG0	[0:0]	I2CRDY	R	0x00	IRQ serial interface ready flag.
		[1:1]	VOVDIS	R	0x00	IRQ VOVDIS flag.
		[2:2]	VCHRDY	R	0x00	IRQ VCHRDY flag.
		[3:3]	VOVCH	R	0x00	IRQ VOVCH flag.
		[4:4]	SRCLOW	R	0x00	IRQ source low threshold (SRCx) flag.
		[5:5]	TEMPCH	R	0x00	IRQ temperature (charge) flag.
		[6:6]	TEMPDIS	R	0x00	IRQ temperature (discharge) flag.
		[7:7]	CHG5VCONN	R	0x00	IRQ 5 V charger connected flag.
0x16	IRQFLG1	[0:0]	SRC1MPPTSTART	R	0x00	IRQ MPPT start (SRC1) flag.
		[1:1]	SRC1MPPTDONE	R	0x00	IRQ MPPT done (SRC1) flag.
		[2:2]	SRC2MPPTSTART	R	0x00	IRQ MPPT start (SRC2) flag.
		[3:3]	SRC2MPPTDONE	R	0x00	IRQ MPPT done (SRC2) flag.
		[4:4]	STODONE	R	0x00	IRQ STO measurement done flag.
		[5:5]	TEMPDONE	R	0x00	IRQ temperature measurement done flag.
		[6:6]	APMDONE	R	0x00	IRQ APM done flag.
		[7:7]	APMERR	R	0x00	IRQ APM error flag.
0x17	STATUS0	[0:0]	VOVDIS	R	0x00	Status VOVIDS.
		[1:1]	VCHRDY	R	0x00	Status VCHRDY.
		[2:2]	VOVCH	R	0x00	Status VOVCH.
		[3:3]	SRC1LOW	R	0x00	Status source low threshold (SRC1).
		[4:4]	SRC2LOW	R	0x00	Status source low threshold (SRC2).
		[5:5]	CHG5VCONN	R	0x00	Status 5 V charger connected.
0x18	STATUS1	[0:0]	TEMPCOLDCH	R	0x00	Status cold temperature (charge).
		[1:1]	TEMPHOTCH	R	0x00	Status hot temperature (charge).
		[2:2]	TEMPCOLDDIS	R	0x00	Status cold temperature (discharge).
		[3:3]	TEMPHOTDIS	R	0x00	Status hot temperature (discharge).
0x19	APM0SRC1	[7:0]	DATA	R	0x00	APM data 0 (SRC1).
0x1A	APM1SRC1	[7:0]	DATA	R	0x00	APM data 1 (SRC1).
0x1B	APM2SRC1	[7:0]	DATA	R	0x00	APM data 2 (SRC1).
0x1C	APM0SRC2	[7:0]	DATA	R	0x00	APM data 0 (SRC2).
0x1D	APM1SRC2	[7:0]	DATA	R	0x00	APM data 1 (SRC2).
0x1E	APM2SRC2	[7:0]	DATA	R	0x00	APM data 2 (SRC2).
0x1F	APM0LOAD	[7:0]	DATA	R	0x00	APM data 0 (LOAD).
0x20	APM1LOAD	[7:0]	DATA	R	0x00	APM data 1 (LOAD).
0x21	APM2LOAD	[7:0]	DATA	R	0x00	APM data 2 (LOAD).
0x22	APMERR	[0:0]	SRC1OV	R	0x00	APM counter overflow SRC1 .
		[1:1]	SRC1NVLD	R	0x00	APM counter corrupted SRC1 .
		[2:2]	SRC2OV	R	0x00	APM counter overflow SRC2 .
		[3:3]	SRC2NVLD	R	0x00	APM counter corrupted SRC2 .
		[4:4]	LOADOV	R	0x00	APM counter overflow LOAD .
		[5:5]	LOADNVLD	R	0x00	APM counter corrupted LOAD .
		[6:6]	CHG5VLIM	R	0x00	5 V charger current limited due to overdischarged storage element.
0x23	TEMP	[7:0]	DATA	R	0x00	Temperature monitoring value.

Table 8: Register map (part 3)



Address	Name	Bit	Field Name	Access	Reset	Description
0x24	STO	[7:0]	DATA	R	0x00	STO monitoring value.
0x25	SRC1	[7:0]	DATA	R	0x00	SRC1 monitoring value.
0x26	SRC2	[7:0]	DATA	R	0x00	SRC2 monitoring value.
0x27	APM0CHG5V	[7:0]	DATA	R	0x00	APM data 0 (CHG5V).
0x28	APM1CHG5V	[7:0]	DATA	R	0x00	APM data 1 (CHG5V).
0x29	CHG5V	[0:0]	EN	R/W	0x01	5 V charger enable.
		[1:1]	CVEN	R/W	0x00	Constant voltage (CV) mode enable.
		[6:2]	THRESH	R/W	0x00	5 V charger stop voltage threshold.
0x2A	APMACC	[7:0]	CFG	R/W	0x00	Number of APM window accumulations.
...	RSVD	-	-	R	-	Reserved.
0xE0	PNO	[7:0]	DATA	R	0x30	Part number 0 data.
0xE1	PN1	[7:0]	DATA	R	0x32	Part number 1 data.
0xE2	PN2	[7:0]	DATA	R	0x39	Part number 2 data.
0xE3	PN3	[7:0]	DATA	R	0x33	Part number 3 data.
0xE4	PN4	[7:0]	DATA	R	0x31	Part number 4 data.

Table 8: Register map (part 4)



3.5. Advanced Configurations

A complete description of the system constraints and configurations is available in Section “System configuration” of the AEM13920 datasheet.

3.5.1. Shipping Mode

The shipping mode feature allows forcing the AEM13920 in **RESET STATE** (see datasheet), thus, disabling all AEM13920 functionalities including both boost converters, the buck converter and the 5 V charger. Only **VINT** is charged from **SRCx** if energy is available from it. The storage element is no longer charged or discharged.

Shipping mode is enabled by installing a jumper in HIGH position on the EVK dedicated header. It is disabled if a jumper is connected to LOW or if **SHIP_MODE** pin is left floating.

3.5.2. ZMPP

The ZMPP feature allows the AEM13920 to regulate the input of the **SRC1** to match the resistance **R_{ZMPP}** connected to the **ZMPP** pin. See the “Theory of Operations” section from the AEM13920 datasheet for more information about the ZMPP mode.

R_{ZMPP} must comply with the following formula:

$$33 \Omega < R_{ZMPP} < 100 \text{ k}\Omega$$

R_{ZMPP} can be connected either on the dedicated screw connector or soldered on the RZMPP footprint next to it.

If unused, leave the resistor footprint RZMPP empty and do not connect a resistor to the screw connector.

3.5.3. Temperature Monitoring and Thermal Protection

The temperature monitoring feature allows to measure the ambient temperature.

To use the temperature monitoring, **R_{DIV}** and **R_{TH}** must be mounted and THERM connected to EN, done by placing a jumper between THERM and EN on the EVK dedicated header. To disable the feature place a jumper between THERM and DIS.

The thermal protection feature allows to protect the storage element by disabling its charge from **SRC1**, **SRC2** and **5V_IN** and its discharge through **LOAD** when the ambient temperature is outside the configured temperature thresholds. The cold and hot thresholds for charging and discharging default values depend on **STO_CFG[2:0]** pins and are configurable through the I²C communication (see datasheet).

To use the thermal protection, the temperature monitoring must be enabled (as explained above), and TEMPPROTECT.EN field set to 1 (default value). The thermal protection uses the configured temperature thresholds to protect the storage element.



4. Functional Tests

This section presents a few simple tests that allow the user to understand the functional behavior of the AEM13920. To avoid damaging the board, follow the procedure found in Section 3.1. If a test has to be restarted, make sure to properly reset the system to obtain reproducible results.

The user can adapt the setup to match the use case system as long as the source limitations are respected, as well as the minimum storage voltage and cold-start constraints (see “Electrical Characteristics at 25 °C” Section of AEM13920 datasheet).

4.1. Start up

4.1.1. Description

The following example allows the user to observe the start-up behavior of the AEM13920, showing that the AEM13920 starts charging the storage element as soon as **VINT** reaches its 2.2 V regulation voltage. The energy source can be connected either on **SRC1** or **SRC2** (named **SRCx**).

4.1.2. Setup

- Oscilloscope:
 - Channel 1: **STO**.
 - Channel 2: **VINT** (may be probed on H pin on **SRC2_CFG[0]** header for example).
- **SRCx** (2 alternatives, initially disconnected):
 - 1 V / 10 mA power supply with a 100 Ω resistor in series ($I_{SRCx} = 2.5$ mA with $R_{MPPT} = 75\%$).
 - SMU set as 2.5 mA current source with 1 V voltage compliance.
- **SRCx_MODE** = H.
 - MPPT ratio mode.
- **SRCx_CFG[2:0]** = HLL.
 - $R_{MPPT} = 75\%$.
- $I_{SRCx} = \frac{1V - 0.75V}{100\Omega} = 2.5\text{mA}$ (PSU)
- $I_{SRCx} = 2.5\text{mA}$ (SMU)
- **SRCx_CFG[4:3]** = LH.
 - $T_{MPPT,PERIOD} = 465$ ms.
 - $T_{MPPT,WAIT} = 7.3$ ms.
- 1000 μF capacitor connected to **STO** as storage element.
- 3 V power supply or SMU connected to **STO** beforehand.
- **STO_CFG[2:0]** = LHL.
 - $V_{OVDIS} = 3.00$ V.
 - $V_{CHRDY} = 3.21$ V.
 - $V_{OVCH} = 4.13$ V.
- **LOAD_CFG[2:0]** = LLL.
 - **LOAD** disabled.
- **LOAD** is floating.
- **5V_IN** left floating.
- Jumper between I²C and DIS and between **VDDIO** and **GND**.
 - I²C disabled.
- Jumper between THERM and DIS.
 - Thermal monitoring disabled.
- Nothing connected to **R_{ZMPP}** screw terminal.

In the following sections, when a “power supply” is required, it can be either a standard one quadrant positive voltage / positive current laboratory power supply with regulated voltage, or an SMU set as voltage source with current compliance.



4.1.3. Measurements

- Reset the AEM13920 as described in Section 3.2.
- Start with:
 - 3 V power supply connected to **STO** so that C_{STO} is charged to 3.0 V beforehand.
 - No source connected to **SRCx**.
- Disconnect the power supply from **STO**.
- Connect the power supply or the SMU to **SRCx**.

- Observe V_{INT} rise up to 2.2 V and be regulated at that voltage.
- Energy is transferred from **SRCx** to **STO**: V_{STO} rises from its initial 3.0 V voltage to V_{OVCH} (4.13 V).
- V_{STO} is regulated to V_{OVCH} (4.13 V) as the AEM13920 prevents the storage element to be charged any further.

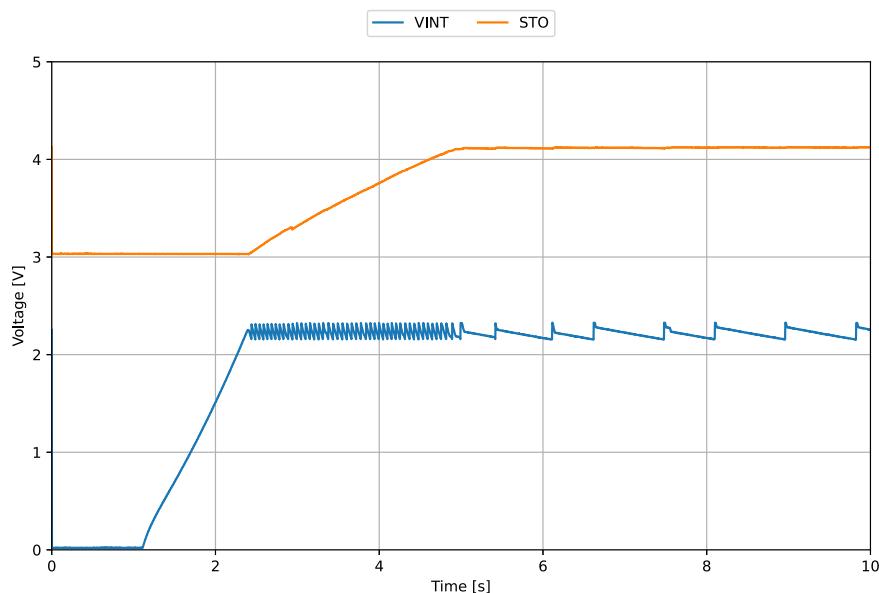


Figure 2: Start-up behavior



4.2. Cold start

4.2.1. Description

The following example allows the user to observe the cold-start behavior of the AEM13920, showing the behavior of **SRC** and **VINT** when the AEM13920 coldstarts. The energy source can be connected either on **SRC1** or **SRC2** (named **SRCx**).

4.2.2. Setup

- Oscilloscope:
 - Channel 1: **SRCx**.
 - Channel 2: **VINT** (may be probed on H pin on **SRC2_CFG[0]** header for example).
 - Note that the oscilloscope probes will have an impact in the minimum input cold-start power due to their input impedance.
- **SRCx** (2 alternatives, initially disconnected):
 - 1 V / 10 mA power supply with a 68 k Ω resistor in series ($I_{SRCx} = 10 \mu A$ with source voltage clamped to 0.3 V during cold start). Please note that using a standard power supply allows for validating the minimum cold-start voltage but does not allow for validating the minimum cold-start power.
 - SMU set as 10 μA current source with 1 V voltage compliance. Using an SMU allows for validating the minimum cold-start power as well as the minimum cold-start voltage.
 - Note that the AEM13920 is able to cold start at lower power than used in this example.
- **SRCx_MODE** = H.
- MPPT ratio mode.
- **SRCx_CFG[2:0]** = HLL.
 - $R_{MPPT} = 75\%$.
- $I_{SRCx} = \frac{1V - 0.3V}{68k\Omega} = 10\mu A$ (PSU)
- $I_{SRCx} = 10\mu A$ (SMU)
- **SRCx_CFG[4:3]** = LH.
 - $T_{MPPT,PERIOD} = 465$ ms
 - $T_{MPPT,WAIT} = 7.3$ ms.
- 1000 μF capacitor connected to **STO** as storage element.
- 3 V power supply connected to **STO** beforehand.
- **STO_CFG[2:0]** = LHL.
 - $V_{OVDIS} = 3.00$ V.
 - $V_{CHRDY} = 3.21$ V.
 - $V_{OVCH} = 4.13$ V.
- **LOAD_CFG[2:0]** = LLL.
 - **LOAD** disabled.
- **LOAD** is floating.
- **5V_IN** left floating.
- Jumper between I²C and DIS and between **VDDIO** and **GND**.
 - I²C disabled.
- Jumper between THERM and DIS.
 - Thermal monitoring disabled.
- Nothing connected to **R_{ZMPP}** screw terminal.



4.2.3. Measurements

- Reset the AEM13920 as described in Section 3.2.
- Start with:
 - 3 V power supply connected to **STO** so that C_{STO} is charged to 3.0 V beforehand.
 - No source connected to **SRCx**.
- Disconnect the power supply from **STO**.
- Connect the power supply or SMU to **SRCx**.

- Cold-start phase:

- Observe V_{SRCx} clamped to 0.3 V.
- Observe V_{INT} rise up to 2.2 V and be regulated at that voltage.
- Once V_{INT} has reached its 2.2 V regulation voltage, the AEM13920 performs a first V_{OC} evaluation on **SRCx**.
- Then, the AEM13920 extracts energy from **SRCx**, regulating V_{SRCx} to 75 % of V_{OC} (about 750 mV).
- V_{OC} is re-evaluated every 465 ms.

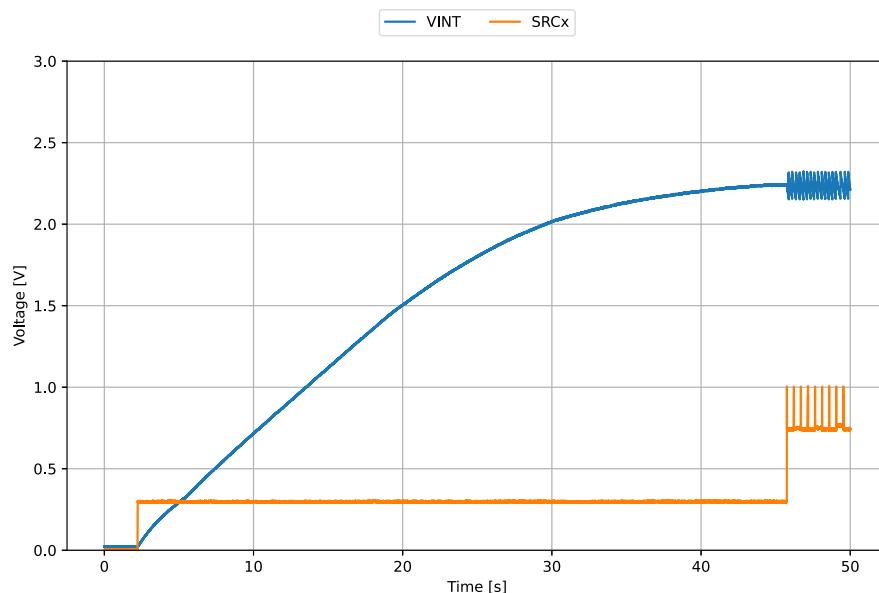


Figure 3: Cold-start behavior



4.3. Load

4.3.1. Description

The following example allows the user to observe how the AEM13920 switches ON and OFF the buck converter supplying the **LOAD** pin. The energy source can be connected either on **SRC1** or **SRC2** (named **SRCx**).

4.3.2. Setup

- Oscilloscope:
 - Channel 1: **STO**.
 - Channel 2: **LOAD**.
- **SRCx** (2 alternatives, initially disconnected):
 - 1 V / 10 mA power supply with a 100 Ω resistor in series ($I_{SRCx} = 2.5$ mA with $R_{MPPT} = 75\%$).
 - SMU set as 2.5 mA current source with 1.0 V voltage compliance.
- **SRCx_MODE** = H.
- MPPT ratio mode.
- **SRCx_CFG[2:0]** = HLL.
- $R_{MPPT} = 75\%$.
- $I_{SRCx} = \frac{1V - 0.75V}{100\Omega} = 2.5\text{mA (PSU)}$
- $I_{SRCx} = 2.5\text{mA (SMU)}$
- **SRCx_CFG[4:3]** = LH.
 - $T_{MPPT,PERIOD} = 465$ ms
 - $T_{MPPT,WAIT} = 7.3$ ms.
- 1000 μF capacitor connected to **STO** as storage element.
- Power supply connected to **STO** beforehand with a voltage below V_{OVDIS} , 2.8 V in this example.
- **STO_CFG[2:0]** = LHL.
 - $V_{OVDIS} = 3.00$ V.
 - $V_{CHRDY} = 3.21$ V.
 - $V_{OVCH} = 4.13$ V.
- **LOAD_CFG[2:0]** = HLH.
 - **LOAD** is regulated at 1.8 V.
- **LOAD**: 5 k Ω resistor connected between **LOAD** and **GND**.
 - $I_{LOAD} = 360$ μA .
- **5V_IN** left floating.
- Jumper between I²C and DIS and between **VDDIO** and **GND**.
 - I²C disabled.
- Jumper between THERM and DIS.
 - Thermal monitoring disabled.
- Nothing connected to R_{ZMPP} screw terminal.



4.3.3. Measurements

- Reset the AEM13920 as described in Section 3.2.
- Start with:
 - 2.8 V power supply connected to **STO** so that C_{STO} is charged to 2.8 V beforehand.
 - No source connected to **SRCx**.
- Disconnect the power supply from **STO**.
- Connect the power supply or SMU to **SRCx**.
- After cold start, observe the storage element charging.
- When $V_{STO} > V_{CHRDY}$, the buck converter is enabled and the **LOAD** starts being regulated to 1.8 V, thus, providing current to the 5 k Ω resistor. There is more energy harvested than consumed (positive power budget), so the storage element keeps being charged.
- Disconnect the power supply or SMU from **SRCx**.
- The current drawn by the 5 k Ω is now discharging the storage element, as no more energy is harvested to compensate for the load.
- When $V_{STO} < V_{OVDIS}$, the AEM13920 waits for T_{CRIT} (2.56 s) and then switches OFF the buck converter. **LOAD** is no longer regulated and drops down to 0 V.

Please note that, in a real application, the storage element would be a battery or a supercapacitor, with much higher stored energy, so that V_{STO} would not drop as low as on Figure 4 during T_{CRIT} .

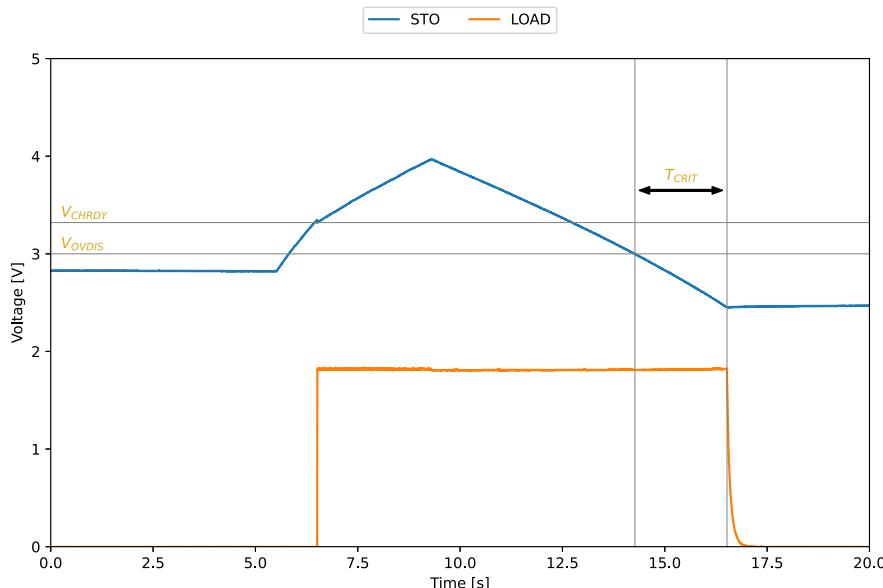


Figure 4: LOAD output behavior



4.4. 5 V Charger

4.4.1. Description

The following example allows the user to observe how the AEM13920 coldstarts and charges the storage element from the 5 V charger.

4.4.2. Setup

- Oscilloscope:
 - Channel 1: **STO**.
 - Channel 2: **5V_IN**.
- **SRCx** left floating.
- **5V_IN**: 5.0 V / 200 mA power supply or SMU (initially disconnected).
- **5V_IN** constant current set to 13.5 mA by installing a jumper on the corresponding header.
- 10 mF capacitor connected to **STO** as storage element.
- Power supply connected to **STO** beforehand with a voltage below **V_{OVDIS}**, 2.8 V in this example.
- **STO_CFG[2:0]** = LHL.
 - **V_{OVDIS}** = 3.00 V.
 - **V_{CHRDY}** = 3.21 V.
 - **V_{OVCH}** = 4.13 V.
- **LOAD_CFG[2:0]** = LLL.
 - **LOAD** is disabled.
- **LOAD** left floating.
- Jumper between I2C and DIS and between **VDDIO** and **GND**.
 - I²C disabled.
- Jumper between THERM and DIS.
 - Thermal monitoring disabled.
- Nothing connected to **R_{ZMPP}** screw terminal.



4.4.3. Measurements

- Reset the AEM13920 as described in Section 3.2.
- Start with:
 - 2.8 V power supply connected to **STO** so that C_{STO} is charged to 2.8 V beforehand.
 - No source connected to **5V_IN**.
- Disconnect the power supply from **STO**.
- Connect the power supply or SMU to **5V_IN**.
- After cold start, observe the storage element charging up to V_{OvCh} (4.13 V).

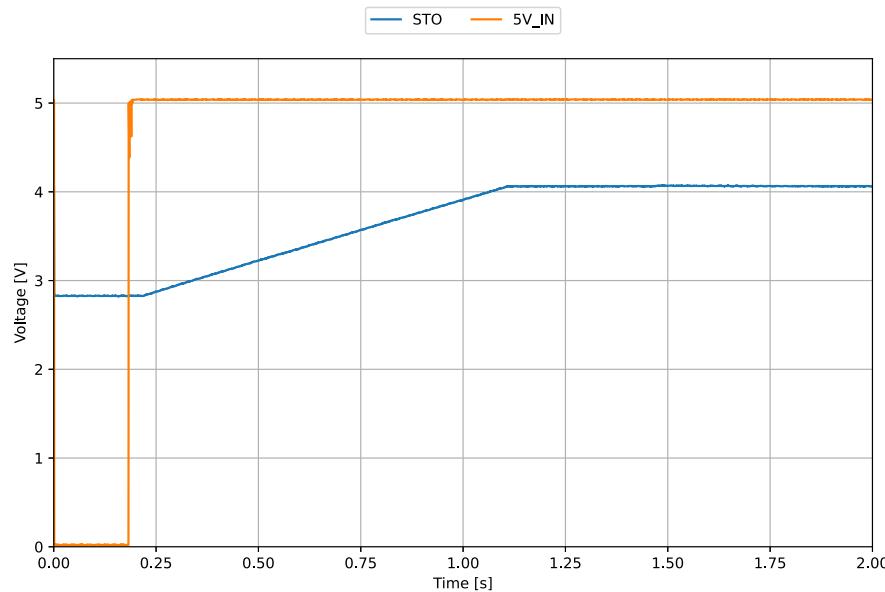


Figure 5: Cold-start and storage element charge from 5V_IN



4.5. Thermal Protection

4.5.1. Description

The following test allows users to observe the thermal protection functionality.

4.5.2. Setup

- Use a heat source to increase the thermistor R_{TH} temperature. In the following example, an SMD hot air rework station has been used, with temperature set to +100°C with moderate air flow.
- Oscilloscope:
 - Channel 1: **SRCx**.
 - Channel 2: **STO**.
- **SRCx**: 1 V / 10 mA power supply with a 3 kΩ resistor in series ($I_{SRCx} = 83 \mu A$ with $R_{MPPT} = 75\%$).
- **SRCx_MODE** = H.
 - MPPT ratio mode.
- **SRCx_CFG[2:0]** = HLL.
 - $R_{MPPT} = 75\%$.
- $I_{SRCx} = \frac{1V - 0.75V}{3k\Omega} = 83\mu A$
- **SRCx_CFG[4:3]** = HL.
 - $T_{MPPT,PERIOD} = 1862$ ms.
 - $T_{MPPT,WAIT} = 29$ ms.
- 1000 μF capacitor connected to **STO** as storage element.
- 3 V power supply connected to **STO** beforehand.
- **STO_CFG[2:0]** = LHL.
 - $V_{OVDIS} = 3.00$ V.
 - $V_{CHRDY} = 3.21$ V.
 - $V_{OVCH} = 4.13$ V.
- **LOAD_CFG[2:0]** = LLL.
 - **LOAD** is disabled.
- **LOAD** left floating.
- **5V_IN** left floating.
- Jumper between I2C and DIS and between **VDDIO** and **GND**.
 - I²C disabled.
- Jumper between THERM and EN.
 - Thermal monitoring enabled.
- 10 kΩ NTC thermistor with $\beta = 3380$ on R_{TH} (default on EVK).
- 22 kΩ pullup resistor on R_{DIV} (default on EVK).
- Storage element charging and discharging disabled below 0°C.
- Storage element charging and discharging disabled above +45°C.
- Nothing connected to R_{ZMPP} screw terminal.



4.5.3. Measurements

- Reset the AEM13920 as described in Section 3.2.
- Start with:
 - 3 V power supply connected to **STO** so that C_{STO} is charged to 3 V beforehand.
 - **SRCx** left floating.
- Disconnect the power supply from **STO**.
- Connect the power supply or SMU to **SRCx**.
- After cold start, observe the storage element charging.
- Start flowing hot air on the thermistor R_{TH} .
- When R_{TH} is hot enough, above 45°C (near 7 s on Figure 6), the AEM13920 thermal protection is triggered:
 - No more energy is extracted from the source connected on **SRCx**, which rises to its open circuit voltage V_{OC} .
 - The storage element is no longer charged (V_{STO} stops rising) even though V_{STO} is below V_{OVCH} , and thus, is protected.
 - The **LOAD** would stop being supplied if enabled.
 - **VINT** is still supplied from **SRCx**.

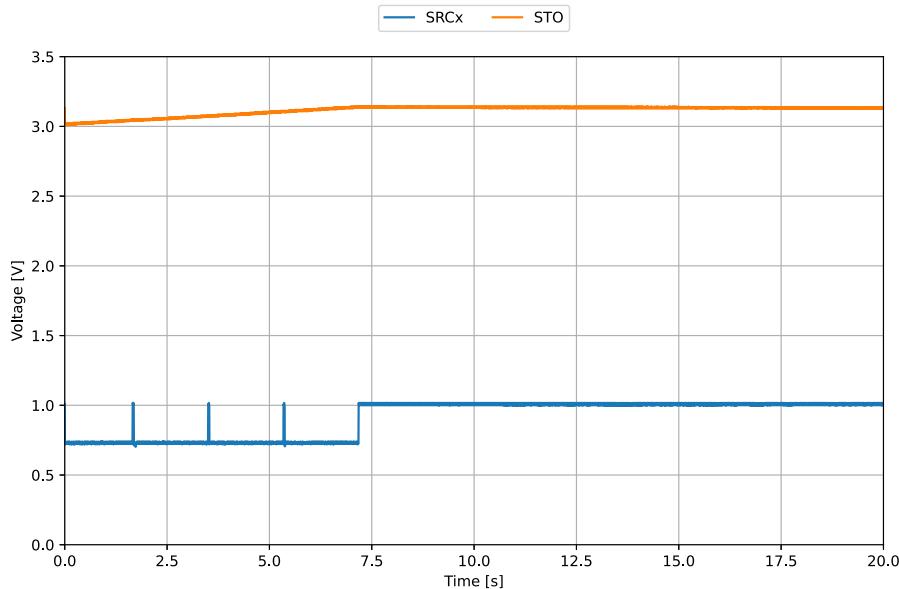


Figure 6: Storage element thermal protection behavior



5. Performance Tests

This section presents the tests to reproduce the performance graphs found in the AEM13920 datasheet. To be able to reproduce those tests, you will need the following:

- 2 source measure units (SMU, typically Keithley 2450). Those must be set with longest integration time.
- 1 voltage source (only for coldstarting the AEM13920 when performing buck efficiency measurement).

To avoid damaging the board, follow the procedure found in Section 3.1 “Safety information”. If a test has to be restarted, make sure to properly reset the system to obtain reproducible results, as shown in Section 3.2.

5.1. Boost Converters Efficiency

5.1.1. Description

The boost converter efficiency is determined for a fixed set point of the AEM13920:

- Fixed **SRCx** voltage V_{SRCx} .
- Fixed **SRCx** current I_{SRCx} .
- Fixed **STO** voltage V_{STO} .
- Fixed inductor value L_{BOOSTx} . Please note that the inductor model has a subsequent influence on the efficiency.
- Fixed boost timing. Use the I²C bus to configure the AEM13920 timing if not using the default value.

Boost efficiency measurement is about measuring the current provided to **STO** for all other parameters fixed.

The following apply for both **SRC1** and **SRC2** (noted **SRCx**).

Please note that, to avoid any leakage that would affect the measurement, no probe or voltmeter should be connected to the AEM13920 pins while measuring the boost efficiency.

5.1.2. Setup

- **SRCx_MODE** = L.
- Constant voltage mode.
- **SRCx_CFG[4:0]** set according to the desired V_{SRCx} set point (see Table 1).
- **SRCx**: SMU set as current source.
 - Current source set to the desired I_{SRCx} .
 - Voltage compliance set to 0.5 V above the desired $V_{SRCx,REG}$ set point.
- **STO**: SMU set as voltage source:
 - Voltage set to the desired V_{STO} set point.
 - Current compliance set so that the power on **STO** ($V_{STO} \times I_{STO}$) is at least higher than the power of the SMU connected to **SRCx** ($V_{SRCx} \times I_{SRCx}$). Do not lower the current compliance lower than 100 μ A.
- Optional: a device able to act as an I²C master and send I²C commands to the AEM13920. Only useful when testing settings that are not accessible through the configuration pins, such as boost timings. Please note that, the results shown on Figure 7 are with x3 boost timing, which is the default value when not configuring the AEM13920 through the I²C registers, but must be configured if the I²C is used.



5.1.3. Measurements

Cold start and initialization

This part must only be done for the first efficiency data point measurement. To avoid having to do it between two subsequent set points, the user must make sure that V_{STO} does not drop below V_{OVDIS} between measurements.

- Start with both SMU switched OFF.
- Reset the AEM13920.
- **STO** SMU: set the voltage to 5.0 V and switch ON, to make sure that V_{STO} is above V_{OVDIS} .
- **SRCx** SMU: set the current source to 1 mA with the voltage compliance to 1.0 V to trigger the AEM13920 cold start.
- Wait for V_{INT} to rise to its 2.2 V regulation voltage.
- The AEM13920 is now ready to perform an efficiency measurement. Do not lower V_{STO} below V_{OVDIS} from that point to avoid the AEM13920 going to **OVDIS STATE**. Keep **STO** SMU current compliance to at least 100 μ A.

Efficiency measurement

The following needs to be done for all desired set points:

- Set **SRCx** SMU to the desired voltage and current set point.
- Set **STO** SMU to the desired voltage and adapted current range.
- Clear both SMU buffers.
- Wait for the number of measures of both SMU to be sufficient (the lower the current the higher the necessary number of measures).
- Determine the average currents and voltages from both SMU buffers.
- Determine the boost efficiency with the following formula:

$$\eta[\%] = \frac{V_{STO} \cdot I_{STO}}{V_{SRCx} \cdot I_{SRCx}} \cdot 100$$

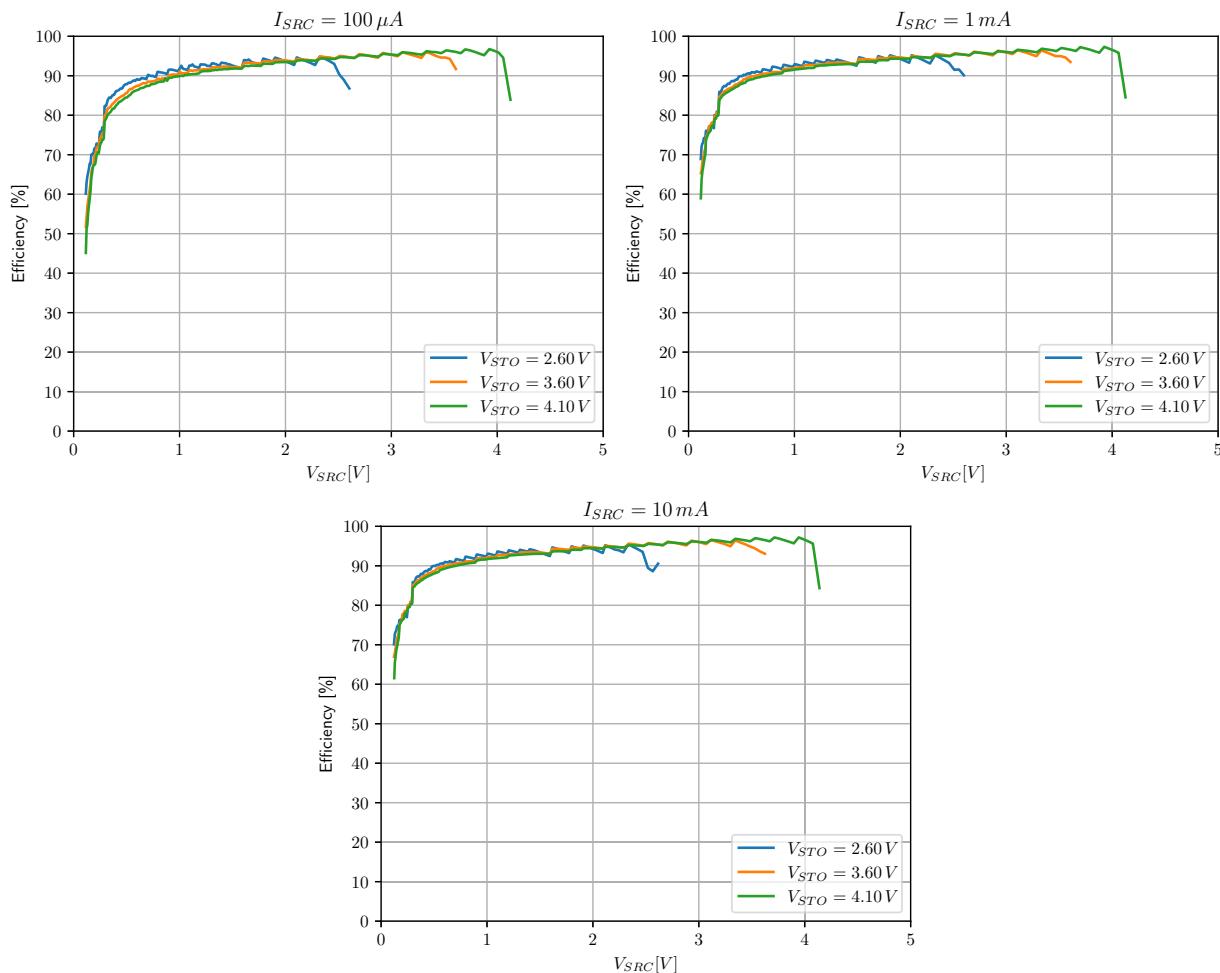


Figure 7: Boost converter efficiency with $L_{BOOSTx} = 33 \mu H$ (Coilcraft LPS4018-333MRB), $BSTxCFG.TMULT = 0x02$ (x3)



5.2. Buck Converter Efficiency

5.2.1. Description

The buck converter efficiency is determined on a fixed set point of the AEM13920:

- Fixed **STO** voltage V_{STO} .
- Fixed **LOAD** voltage V_{LOAD} .
- Fixed **LOAD** current I_{LOAD} .
- Fixed inductor value L_{BUCK} . Please note that the inductor model has a subsequent influence on the efficiency.
- Fixed buck timing. Use the I²C bus to configure the AEM13920 timing if not using the default value.

Buck efficiency measurement is about measuring the current that needs to be pulled from **STO** at a given V_{STO} , to provide a given current/voltage on **LOAD**, with all other parameters fixed.

Please note that, to avoid any leakage that would affect the measurement, no probe or voltmeter should be connected to the AEM13920 pins while measuring the buck efficiency.

5.2.2. Setup

- **STO**: SMU set as voltage source:
 - Voltage set to the desired V_{STO} set point.
 - Current compliance set so that the power on **STO** ($V_{STO} \times I_{STO}$) is at least higher than the power of the SMU connected to **LOAD** ($V_{LOAD} \times I_{LOAD}$).
- **LOAD**: SMU set as voltage source.
 - Voltage set to 0.5 V below the desired V_{LOAD} set point, forcing the SMU to pull the compliance current when the buck converter is regulating its output voltage.
 - Current compliance set to the desired I_{LOAD} .
- **SRCx**: any power supply with voltage higher than $V_{SRCx,CS}$ and lower than 5.0 V (1 V / 1 mA is typically fine).
- Optional: a device able to act as an I²C master and send I²C commands to the AEM13920. Only useful when testing settings that are not accessible through the configuration pins, such as buck timings. Please note that the results shown on Figure 8 are with buck timing x2, that is the default value when not configuring the AEM13920 through the I²C registers. If using the I²C bus, the default value of the BUCKCFG register is 0x03 (timing x4).



5.2.3. Measurements

Cold start and initialization

This part must only be done for the first efficiency data point measurement. To avoid having to do it between two subsequent set points, users must make sure that **STO** voltage doesn't drop below V_{OVDIS} between measurements, with at least 100 μ A current compliance.

- Start with both SMU switched OFF.
- Reset the AEM13920.
- **STO** SMU: set the voltage to 5.0 V and switch ON, to make sure that the V_{STO} is above V_{OVCH} .
- Switch ON **SRCx** power supply.
- Wait for V_{INT} to be regulated at 2.2 V.
- Switch OFF **SRCx** power supply.
- The AEM13920 is now ready to perform an efficiency measurement. Do not lower V_{STO} below V_{OVDIS} from that point to avoid the AEM13920 going to **OVDIS STATE**. Keep the **STO** SMU current compliance to at least 100 μ A.

Efficiency measurement

The following needs to be done for all desired set points:

- Set **STO** SMU to the desired voltage and adapted current range.
- Set **LOAD** SMU to the desired voltage and current set point.
- Clear both SMU buffers.
- Wait for the number of measures of both SMU to be sufficient (the lower the current the higher the necessary number of measures).
- Determine the average currents and voltages from both SMU buffers.
- Determine the buck efficiency with the following formula:

$$\eta[\%] = \frac{V_{LOAD} \cdot I_{LOAD}}{V_{STO} \cdot I_{STO}} \cdot 100$$


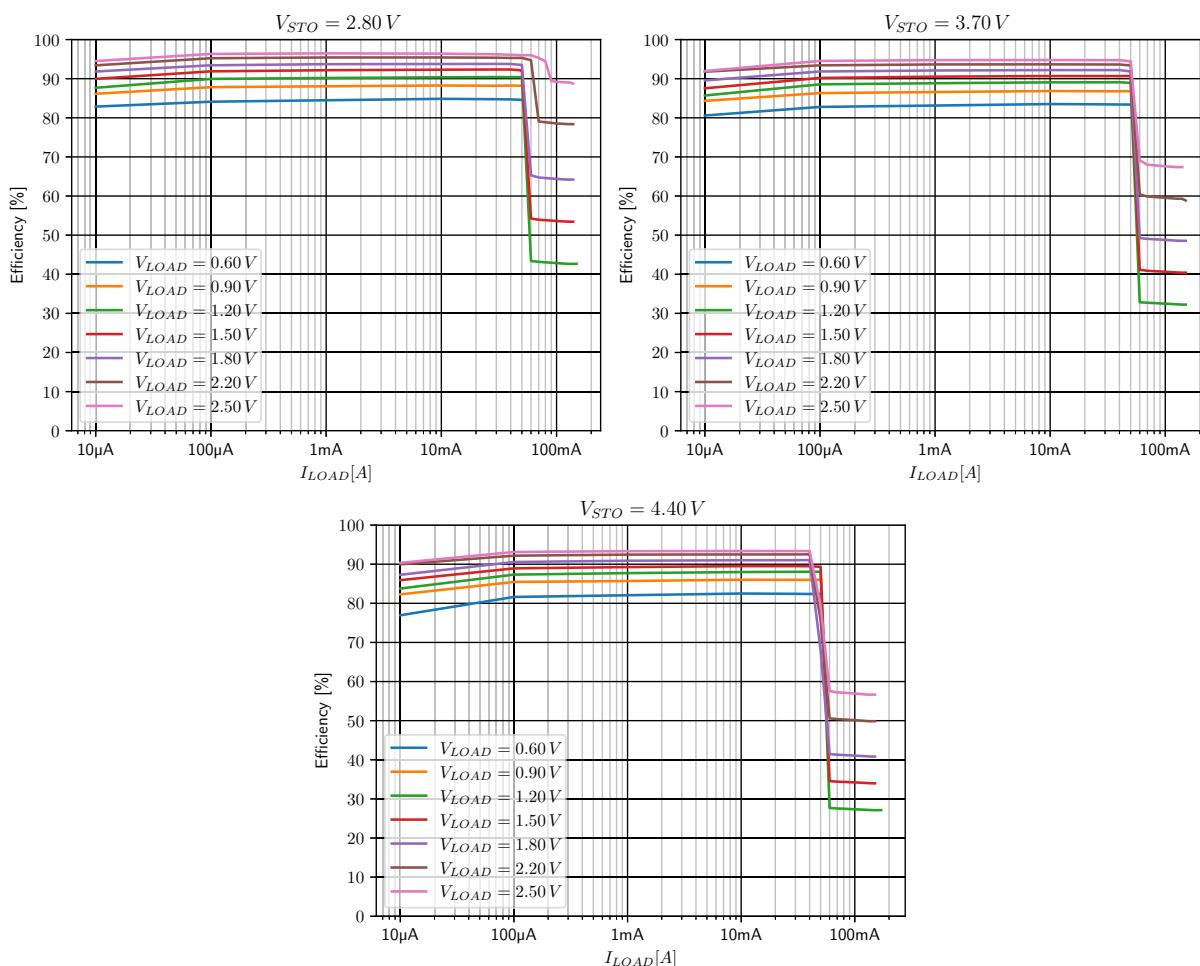


Figure 8: Buck (LOAD) converter efficiency with $L_{BUCK} = 10 \mu$ H (TDK VLS252012CX-100M-1), $T_{MULT} = x2$



6. EVK Schematic



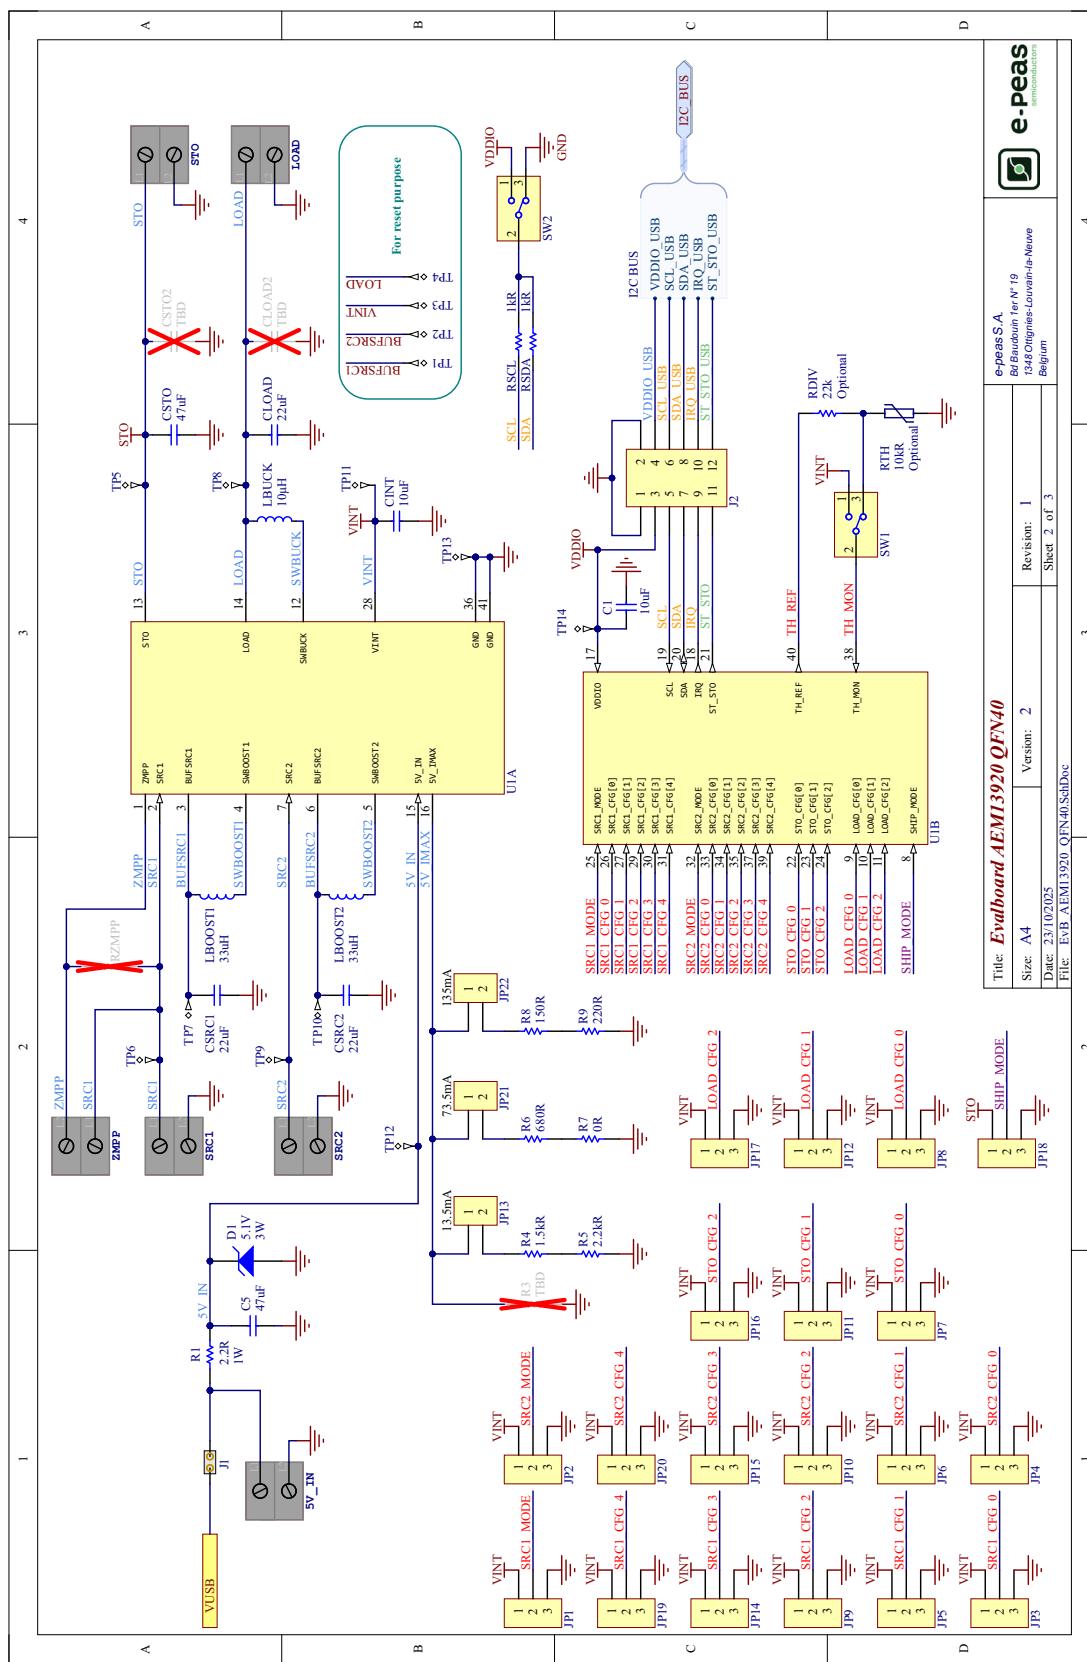

7. Revision History

EVK Version	User Guide Revision	Date	Description
1.2	1.0	December, 2023	Creation of the document.
1.5	1.0	August, 2024	<ul style="list-style-type: none">- Update figures to EVK v1.5.- Corrected EVK dimensions on first page.- Corrected error in “Advanced Configurations”, “Thermal Monitoring” section.- Renamed “sleep threshold” to “source low threshold” in Register map table.- Corrected inconsistencies in “Functional Test” section.- Modified cold start functional test setup and results for $V_{oc} = 1$ V instead of 0.3 V.
1.6	1.0	September, 2024	Update to EVK v1.6.
1.6	1.1	November, 2024	Corrected typos throughout the document.
2.0	1.0	October, 2025	<ul style="list-style-type: none">- Update to IC PN 10AEM13920J0001.- Update to EVK v2.0.
2.1	1.0	October, 2025	Update to EVK v2.1: <ul style="list-style-type: none">- Added USB-to-I²C converter.

Table 9: Revision history