

BD1-Series

Battery Disconnect Power Switch

PRODUCT WEBPAGE

request sample, configure part, watch video



The BD1-Series battery disconnect switch is designed to minimize battery drain, ensure maintenance personnel safety. Additionally, the optional, removable key adds an extra layer of security to protect against vehicle theft.

1
Pole

250
Amps

12-24
VDC


IP67 Sealing
Above-Panel

Typical Applications


- On/Off-Highway Equipment
- Military
- Marine

Design Features


OFF POSITION

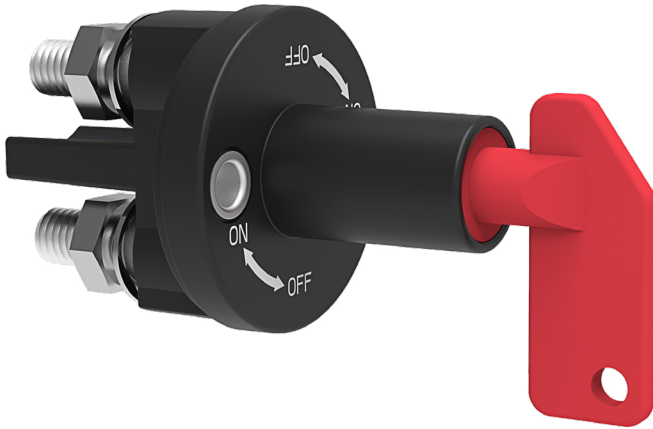

ON POSITION

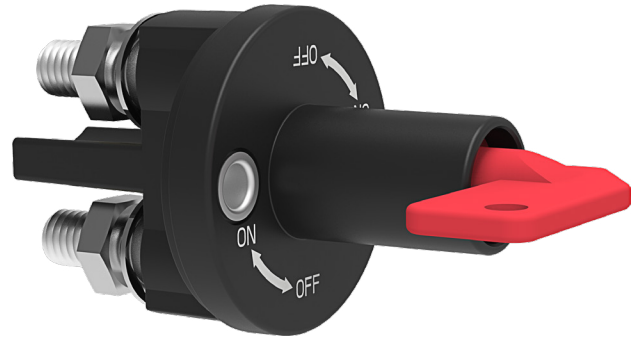

OFF POSITION WITH KEY REMOVED

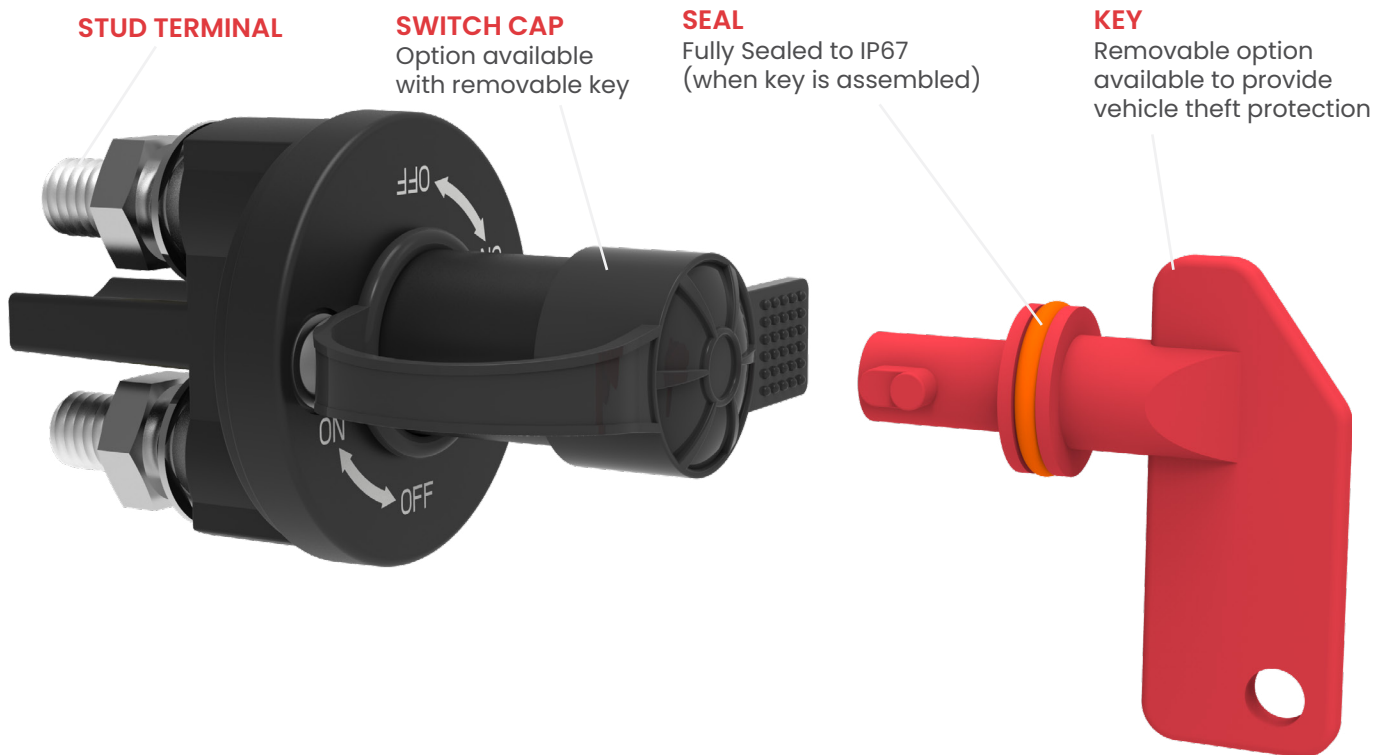

Tech Specs

Electrical

Application Voltage	DC Rated voltage: 12VDC / 24VDC Range of operating voltage: 12VDC: min 9VDC, max 16VDC; 24VDC: min 18VDC, max 32VDC
Current Ratings	250A@ 12VDC/24VDC
Contact Voltage Drop	Voltage drop≤100mV after 300 sec. ON at 200% rated current prior to endurance test; Voltage drop≤500mV after 5 msec. ON at 1600A max. current prior to endurance test.
Dielectric Strength	50HZ, 1200VAC for 1 minute between electrically / isolated terminals in main circuit; between terminals of main circuit, knob and enclosure.
Insulation Resistance	Minimum of 100 Megohms 1 min @ 500VDC.
Temperature Rise	Terminal should not exceed 90°C above ambient at rated current after endurance test.
Endurance	2 seconds ON and 3 seconds OFF per operation, load with rated current & voltage. 12V test @14V; 24V test @28V. Total 20,000 cycles: 250A current ratings, including 4,000 cycles respectively at -40 °C±2 and +85 °C±2; 12,000 cycles at 23 °C±2.
Overload	500A: 300 seconds ON; 1600A: 30 seconds ON.

Mechanical

Handling Shock	Fully functional after 3 drops from 1000 mm height. Surface damage may occur.
----------------	---

Environmental

Operating Temp.	-40 °C to +85 °C.
Moisture Resistance	IEC 60068-2-38 or G/T 2423.34, Test Z/AD: Composite temperature/humidity cycle test, ten 24-hour cycles @ -10°C to +65°C, ≤80-96% RH.
Thermal Cycling	IEC 60068-2-14 or GB/T 2423.22, Test Nb, 25 Cycles -40°C to +85°C.
Thermal Shock	GB/T 28046.4-2011, 5.3.2, Test Na (100 cycles@ -40°C to +25°C to+85°C to +25°C).
Thermal Resistance	ISO 16750-4 or GB/T 28046.4 Cold: Test A, work 24 hours @ -40°C ISO 16750-4 or GB/T 28046.4 Heat: Test B, work 48 hours @ +85°C.
Vibration	IEC 60068-2-34 or GB/ T 2423.11,10- 500 Hz, Random vibration test for 8 hours in each of the 3 mutually perpendicular axes. 25Gs @ Z axes, 12.5Gs @ X/Y axes, powered.
Salt Spray	IEC 60695-11-10 or GB/T 2408, HB (horizontal burning) and V0 (vertical burning).
Sealing	IP67, for above and below-panel components of actual switch only
Chemical Splash	Gasoline, Diesel, Motor Oil, Brake Fluid, Ammonia, Mixture of previous five chemicals.
UV Protection	ASTM G155-05a, cycle 11, 300 hr Xenon Arc, 1.4W / (m2 Nm), wavelength 420 Nm.

Physical

Number of Poles	1 pole
Wiring Terminals	Line / Load terminal: Stainless steel nuts Torque value: M10 (10-15 Nm).
Mounting	M6/M7 bolt and nut, torque value: 4-5 Nm.
Torque Operation	0.5-1.0 Nm.
Body Color	Black
Actuator Color	Red
Weight	Approximately 165g
Material	Base & Bracket & Key (Glass Filled Nylon), Studs (Tin plated brass), Nuts (SUS304), Locking Washers (SUS304)

Ordering Scheme

Sample
Part Number **BD1 - 1 A 2 /CAP**

Selection 1 2 3 4 5

1. SERIES

BD1 Battery Disconnect Power Switch (1 Pole)

2. RATING / CYCLES

1 250A @ 12/24VDC

Notes:
1 Individual Keys separately available, reference part number 308-39943-001.
2 Only available with rating code "1".
3 The Cap accessory is only available for the removable key type.

[Configure Complete Part Number >](#) [Browse Standard Parts >](#)

3. KEY STYLE

A Removable ¹ **B** Non-Removable

4. TERMINATION


1 M10 Stud 19 mm length
2 M10 Stud 27 mm length
3 M8 Stud 19 mm length ²

5. ACCESSORY ³

BLANK Without Cap **/CAP** With Cap

Dimensional Specs

inches [millimeters]

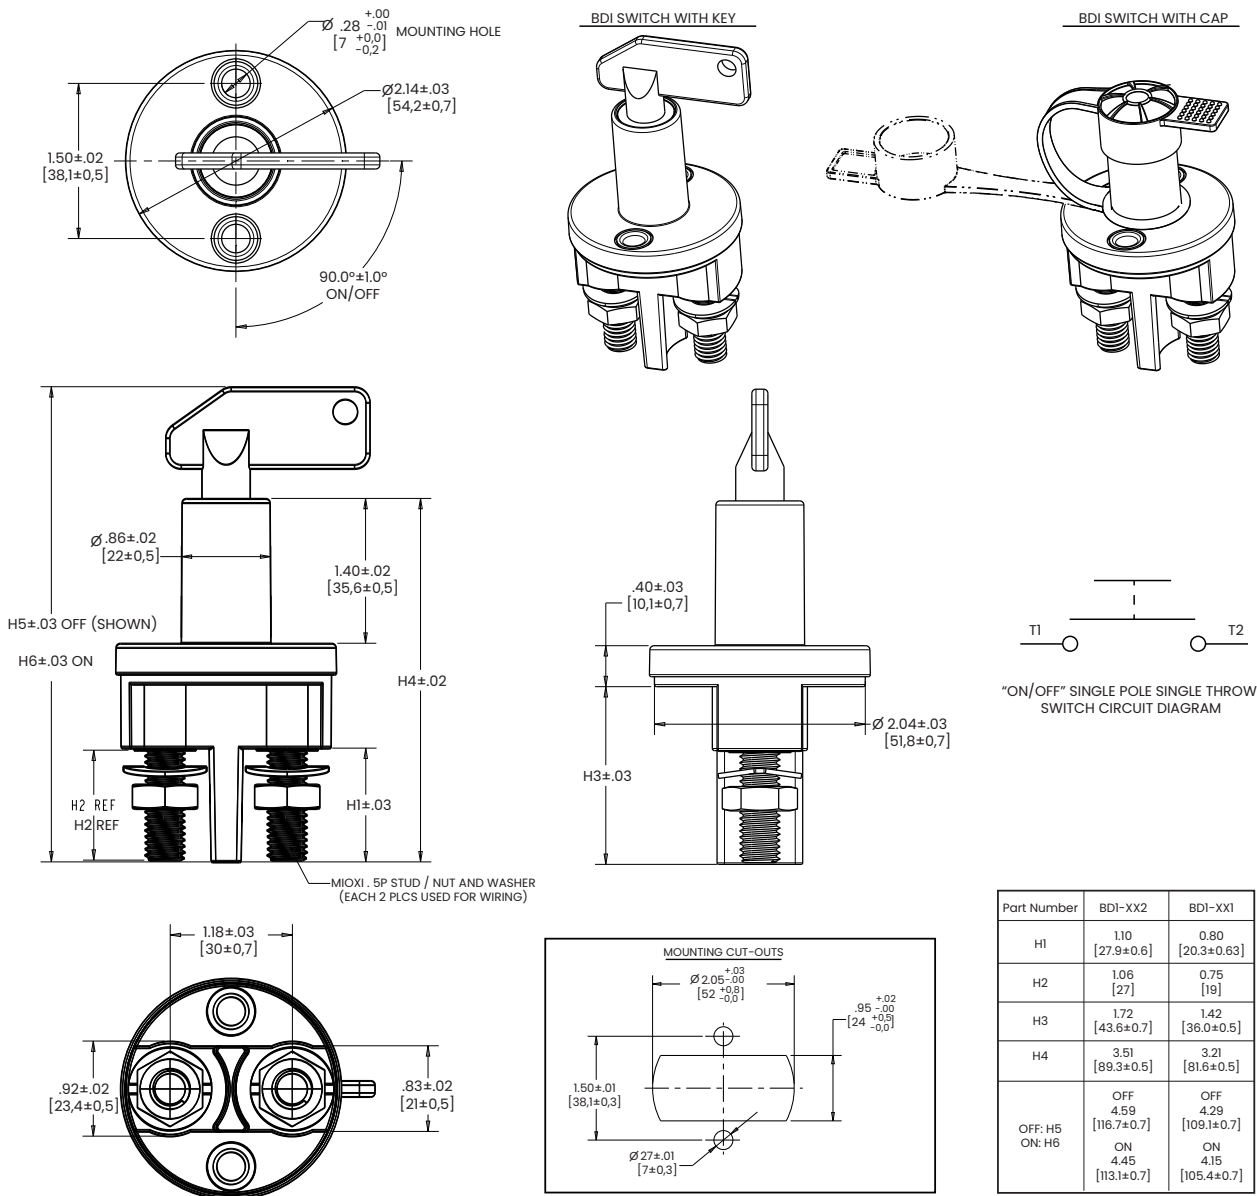

Notes:
1 Torque for mounting nut: M6, M7 or M8 (4-5 nm)
2 Torque for wiring nut: M10 (10-15 nm)
3 Switch can be mounted vertically or horizontally

COS-0099 Rev: C, CLA-0154 Rev: C
*Manufacturer reserves the right to change product specification without prior notice.
Rev: 063026