
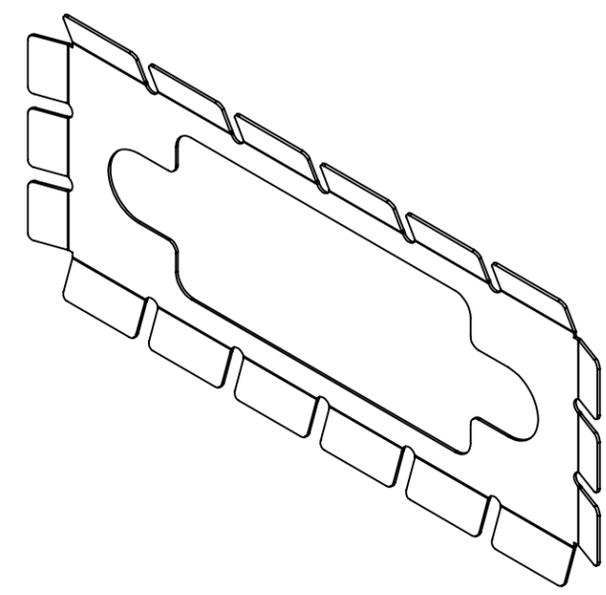


REVISIONS			
REV.	DESCRIPTION	CHANGED BY	APPROVED BY
A	PRODUCTION RELEASE	-	-

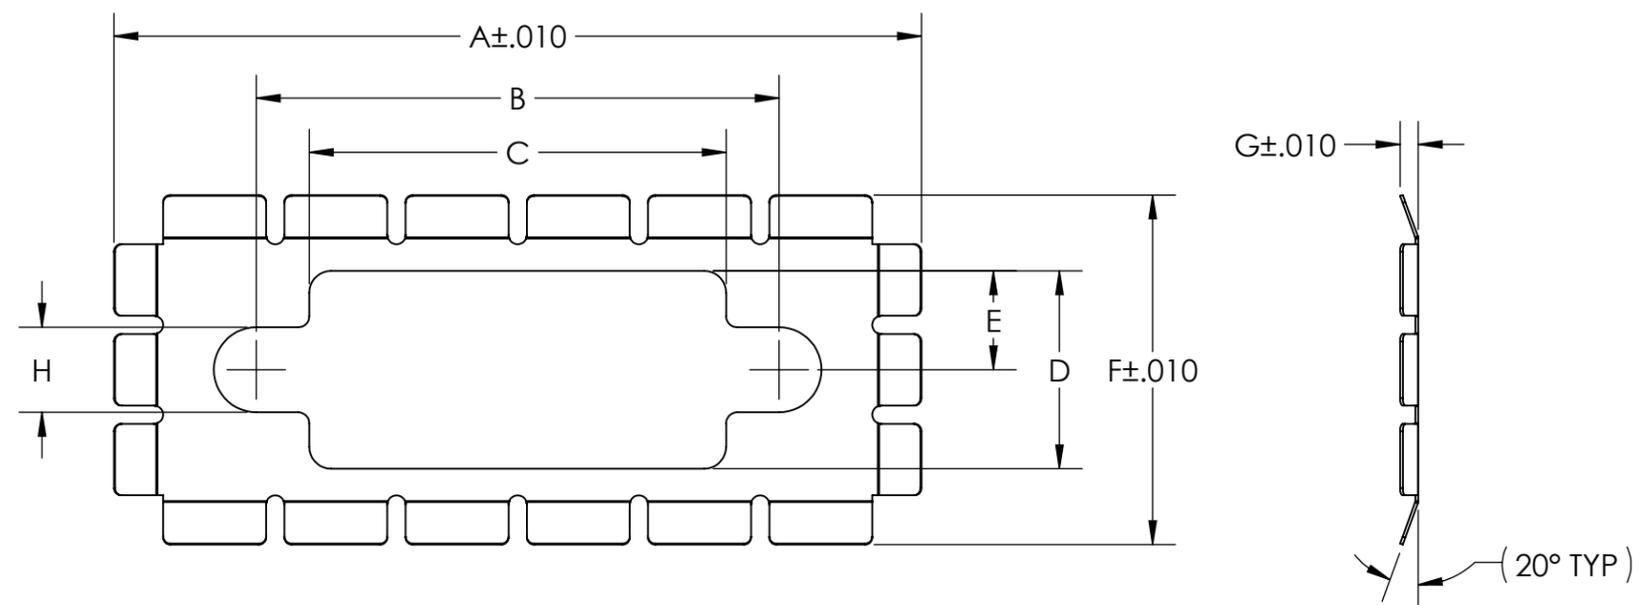

**MICRO D-SUB GASKETS FOR SOCKET OR PLUG CONNECTORS**

PART NUMBER*	TYPE	A	B	C	D	E	F	G	H
09D-M-200-SS	9 PIN	.954	.570	.405	.270	.135	.477	.025	.116
15D-M-200-SS	15 PIN	1.104	.715	.570	.270	.135	.477	.025	.116
21D-M-200-SS	21 PIN	1.254	.866	.726	.270	.135	.477	.025	.116
25D-M-200-SS	25 PIN	1.351	.965	.820	.270	.135	.477	.025	.116
31D-M-200-SS	31 PIN	1.504	1.115	.970	.270	.135	.477	.025	.116
37D-M-200-SS	37 PIN	1.654	1.265	1.120	.270	.135	.477	.025	.116
51D-M-200-SS	51 PIN	1.604	1.215	1.090	.313	.157	.520	.025	.116
100D-M-200-SS	100 PIN	2.339	1.800	1.515	.358	.179	.563	.025	.180

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OWNED BY LEADERTECH, OR DEVELOPED AT ITS OWN PRIVATE EXPENSE, AND MAY NOT BE USED, DUPLICATED OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE INCLUDING DESIGN, MANUFACTURE OR PROCUREMENT WITHOUT THE WRITTEN PERMISSION OF LEADERTECH. LEADERTECH DOES NOT GUARANTEE OR WARRANTY THE PERFORMANCE CHARACTERISTICS.

<p><b>UNLESS OTHERWISE SPECIFIED:</b>          - ALL DIMENSIONS ARE IN INCHES          - PART SHALL BE FREE OF BURRS AND SHARP EDGES          - ALL DIMENSIONS SHOWN APPLY AFTER PLATINGS AND COATINGS          - RoHS COMPLIANT PER EU DIRECTIVE 2011/65/EU          - POI = POINT OF INTERSECTION</p>	<p>THIRD ANGLE PROJECTION</p>	<p>The Leading Edge in FM Shielding Technology</p>		
		<p>TITLE: <b>SLOTTED MICRO D-SUB CONNECTOR GASKET</b></p>		
<p>DRAWN BY: LB 2022-08-09</p>		<p>APPROVED BY: Varghese, Leshin 2022.09.20 08:17:06 -04'00'</p>		<p>SCALE: <b>B</b></p>
<p>FINISH: NONE</p>		<p>MATERIAL: .0040" 302/304 STAINLESS STEEL 1/2H PER ASTM A666</p>		<p>DWG. NO.: <b>PPD-M-200-SS</b></p>
				<p>REV: <b>A</b></p>
				<p>CAGE CODE: 4J674 SHEET: 1 OF 1</p>