

## Han 200A PE axial module, male 25-40mm<sup>2</sup>

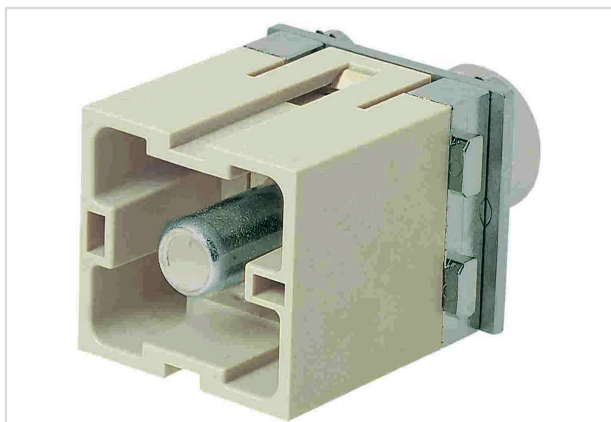


Image is for illustration purposes only. Please refer to product description.

|                    |                                                                               |
|--------------------|-------------------------------------------------------------------------------|
| Part number        | 09 14 001 2668                                                                |
| Specification      | Han 200A PE axial module, male 25-40mm <sup>2</sup>                           |
| HARTING eCatalogue | <a href="https://harting.com/09140012668">https://harting.com/09140012668</a> |

### Identification

|                    |                      |
|--------------------|----------------------|
| Category           | Modules              |
| Series             | Han-Modular®         |
| Type of module     | Han® 200 A PE module |
| Size of the module | Double module        |

### Version

|                    |                         |
|--------------------|-------------------------|
| Termination method | Axial screw termination |
| Gender             | Male                    |
| Number of contacts | 1                       |

### Technical characteristics

|                         |                           |
|-------------------------|---------------------------|
| Conductor cross-section | 25 ... 40 mm <sup>2</sup> |
| Wire outer diameter     | ≤29 mm                    |
| Insulation resistance   | >10 <sup>10</sup> Ω       |
| Contact resistance      | ≤0.2 mΩ                   |
| Stripping length        | 16 mm                     |
| Tightening torque       | 8 Nm                      |
| Limiting temperature    | -40 ... +125 °C           |
| Mating cycles           | ≥500                      |

### Material properties

|                   |                        |
|-------------------|------------------------|
| Material (insert) | Polycarbonate (PC)     |
| Colour (insert)   | RAL 7032 (pebble grey) |



**Pushing Performance**  
Since 1945

## Material properties

|                                           |                                                        |
|-------------------------------------------|--------------------------------------------------------|
| Material (contacts)                       | Copper alloy                                           |
| Surface (contacts)                        | Silver plated                                          |
| Material flammability class acc. to UL 94 | V-0                                                    |
| RoHS                                      | compliant with exemption                               |
| RoHS exemptions                           | 6(c): Copper alloy containing up to 4 % lead by weight |
| ELV status                                | compliant with exemption                               |
| China RoHS                                | 50                                                     |
| REACH Annex XVII substances               | Not contained                                          |
| REACH ANNEX XIV substances                | Not contained                                          |
| REACH SVHC substances                     | Yes                                                    |
| REACH SVHC substances                     | Lead                                                   |
| ECHA SCIP number                          | 5dbb3851-b94e-4e88-97a1-571845975242                   |
| California Proposition 65 substances      | Yes                                                    |
| California Proposition 65 substances      | Lead<br>Nickel                                         |
| Fire protection on railway vehicles       | EN 45545-2 (2020-08) + A1 (2023-10)                    |
| Requirement set with Hazard Levels        | R22 (HL 1-3)<br>R23 (HL 1-3)                           |

## Specifications and approvals

|                |                                                          |
|----------------|----------------------------------------------------------|
| Specifications | IEC 60664-1<br>IEC 61984<br>IEC 61373 Category 1 Class B |
| Approvals      | DNV GL                                                   |

## Commercial data

|                                |                                                           |
|--------------------------------|-----------------------------------------------------------|
| Packaging size                 | 1                                                         |
| Net weight                     | 90 g                                                      |
| Country of origin              | Romania                                                   |
| European customs tariff number | 85359000                                                  |
| GTIN                           | 5713140019164                                             |
| eCl@ss                         | 27440217 Module for industrial connectors (power/signals) |
| ETIM                           | EC000438                                                  |
| UNSPSC 24.0                    | 39121552                                                  |