

## T1 SPE Cable SF/TP 1x2xAWG22/7 PUR 500m

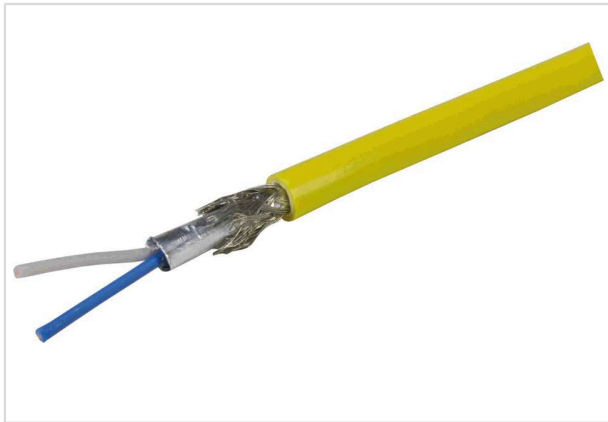


Image is for illustration purposes only. Please refer to product description.

Part number	09 45 600 2011
Specification	T1 SPE Cable SF/TP 1x2xAWG22/7 PUR 500m
HARTING eCatalogue	<a href="https://harting.com/09456002011">https://harting.com/09456002011</a>

### Identification

Category	System cabling
Series	HARTING T1 Industrial
Element	Bulk cables
Specification	Not assembled
Type of cable	Copper cable (round)
Description of the cable	Flame retardant Oil and UV resistant Halogen-free
Features	Perfectly suited for the combination with HARTING SPE connectors For fixed and flexible installations in industrial applications

### Version

Cable length	500 m
Number of cores	2
Core structure	1x 2x AWG 22/7
Shielding	Shielded

### Technical characteristics

Rated voltage	100 V
Transmission characteristics	600 MHz Bandwidth
Data rate	10 Mbit/s 100 Mbit/s 1 Gbit/s
Loop resistance	120 $\Omega$ /km



Pushing Performance  
 Since 1945

## Technical characteristics

Limiting temperature	-40 ... +80 °C unmoved -25 ... +80 °C moved
Cable diameter	5.2 mm ± 0.2 mm
Minimum bending radius	4x Cable diameter (singular bending) 8x Cable diameter (repeated bending)
Test voltage U <sub>DC</sub>	1 kV Wire / wire / shielding
Insulation resistance @ 20 °C	≥5,000 MΩ x km
Impedance @ 100 MHz	100 Ω ±5 %

## Material properties

Material (cable)	PUR (polyurethane)
Colour (cable)	Yellow
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Yes
REACH SVHC substances	Potassium 1,1,2,2,3,3,4,4,4-nonafluorobutane-1-sulphonate
ECHA SCIP number	ff02956a-37e1-4ebf-a7f4-c1f2ab790cc0
California Proposition 65 substances	Not contained

## Specifications and approvals

Specifications	ISO/IEC 11801-3
	IEC 61156-11
	IEC 61156-12
	IEEE 802.3bu (remote power supply over PoDL = Power over Data Line)
	IEEE 802.3cg (10BASE-T1)
	IEEE 802.3bw (100BASE-T1)
	IEEE 802.3bp (1000BASE-T1)
	IEC 60332-1-2 Flame retardancy
	EN 60811-404 Oil resistance
UL style 21815 (80 °C / 300 V)	

## Commercial data

Packaging size	1
Net weight	20,000 g
Net weight	36 g/m



**Pushing Performance**  
Since 1945

## Commercial data

Country of origin	Germany
European customs tariff number	85444993
GTIN	5713140273764
eCl@ss	27061801 Data and communication cable (copper)
ETIM	EC003249
UNSPSC 24.0	26121609