

preLink RJ45 Keystone module angled

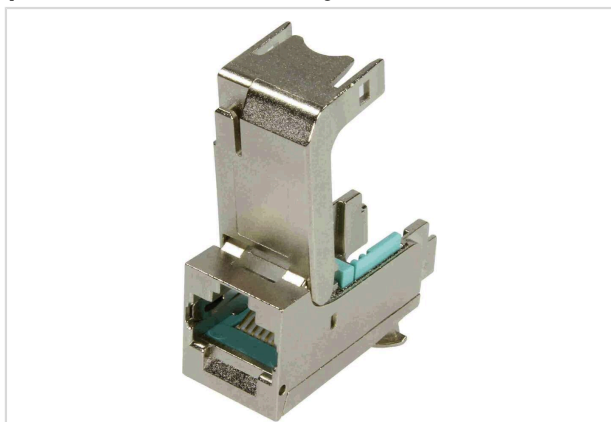


Image is for illustration purposes only. Please refer to product description.

Part number	20 82 500 0002
Specification	preLink RJ45 Keystone module angled
HARTING eCatalogue	https://harting.com/2082500002

Identification

Category	Connectors
Series	preLink® RJ45
Element	Female module
Specification	With termination block

Version

Termination method	preLink® IDC insulation displacement termination
Size	Keystone version
Pack contents	24 pieces

Technical characteristics

Conductor cross-section	0.1 ... 0.12 mm ² 0.22 ... 0.32 mm ²
Conductor cross-section [AWG]	AWG 27 ... AWG 26 AWG 24 ... AWG 22
Transmission characteristics	Cat. 6 _A Class E _A up to 500 MHz
Data rate	10 Mbit/s 100 Mbit/s 1 Gbit/s 2.5 Gbit/s 5 Gbit/s 10 Gbit/s
Limiting temperature	-40 ... +85 °C
Degree of protection acc. to IEC 60529	IP20



Pushing Performance
Since 1945

Technical characteristics

Vibration resistance	5.72 m/s ² acc. to IEC 61373 Category 1 Class B
Shock resistance	5 g / 30 ms, 5 shocks / axis and direction acc. to IEC 61373 Category 1 Class B

Material properties

RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained

Specifications and approvals

Specifications	EN 45545-2
Approvals	DNV GL
PROFINET	Yes

Commercial data

Packaging size	24
Net weight	23.646 g
Country of origin	Germany
European customs tariff number	85366990
GTIN	5713140135741
eCl@ss	27440205 Contact insert for industrial connectors
ETIM	EC000438
UNSPSC 24.0	39121522