

IB IL 24/230 DOR4/W-PAC - Relay module

2861878

<https://www.phoenixcontact.com/us/products/2861878>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Inline, Relay terminal, Relay outputs: 4 (floating), Changeover contact, 24 V DC, 230 V AC, for switching ohmic loads, transmission speed in the local bus: 500 kbps, degree of protection: IP20, including Inline connectors and marking fields

Product description

The terminal is designed for use within an Inline station. The terminal has four floating relay changeover contacts. The terminal can be used in the PELV area and in the AC area. Observe the applicable regulations and safety notes when using the terminal in the AC area. Features - Safe isolation in accordance with EN 50178 - Floating connection for four actuators - Nominal current at the output: 3 A - Total current of the terminal: 4x 3 A = 12 A - Diagnostic and status indicators

Your advantages

- Safe isolation
- Floating connections for 4 actuators
- Nominal current at the output: 3 A
- Total current of the terminal: 3 A
- Diagnostic and status indicators

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2861878 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | DR01 |
| Product key | DRI133 |
| GTIN | 4017918894573 |
| Weight per piece (including packing) | 216.4 g |
| Weight per piece (excluding packing) | 138 g |
| Customs tariff number | 85389099 |
| Country of origin | DE |

IB IL 24/230 DOR4/W-PAC - Relay module



2861878

<https://www.phoenixcontact.com/us/products/2861878>

Technical data

Dimensions

| Dimensional drawing | |
|---------------------|--------------------|
| | |
| Width | 48.8 mm |
| Height | 119.8 mm |
| Depth | 71.5 mm |
| Note on dimensions | Housing dimensions |

Notes

Note on application

| | |
|---------------------|-------------------------|
| Note on application | Only for industrial use |
|---------------------|-------------------------|

Interfaces

Inline local bus

| | |
|----------------------|--------------------|
| Number of interfaces | 2 |
| Connection method | Inline data jumper |
| Transmission speed | 500 kbps |

System properties

Module

| | |
|-----------------------------|--------|
| ID code (dec.) | 189 |
| ID code (hex) | BD |
| Length code (hex) | 41 |
| Length code (dec) | 65 |
| Process data channel | 4 bit |
| Input address area | 0 Byte |
| Output address area | 4 bit |
| Register length | 4 bit |
| Required parameter data | 3 Byte |
| Required configuration data | 4 Byte |

Output data

Relay

| | |
|-------------------|------------------------|
| Number of outputs | 4 (floating) |
| Connection method | Spring-cage connection |

IB IL 24/230 DOR4/W-PAC - Relay module

2861878

<https://www.phoenixcontact.com/us/products/2861878>



| | |
|------------------------|------------------------------|
| Contact switching type | Changeover contact |
| Switching voltage | min. 5 V DC max. 250 V DC |
| | |

Product properties

| | |
|-----------------------|--|
| Product type | I/O component |
| Product family | Inline |
| Type | modular |
| Installation location | Control cabinet |
| Scope of supply | including Inline connectors and marking fields |
| No. of channels | 4 |
| Special properties | for switching ohmic loads |

Electrical properties

| | |
|---|-------------------------------|
| Maximum power dissipation for nominal condition | 2.85 W |
| Potentials: Communications power (U_L) | |
| Supply voltage | 7.5 V DC (via voltage jumper) |
| Current draw | max. 187 mA |

Electrical isolation/isolation of the voltage ranges

| | |
|--|--------------------|
| Test voltage: Relay contact / Bus logics | 4 kV, 50 Hz, 1 min |
| Test voltage: Contact/contact | 1 kV, 50 Hz, 1 min |
| Test voltage: Contact / PE | 1 kV, 50 Hz, 1 min |

Connection data

| | |
|----------------------------------|--|
| Connection technology | |
| Connection name | Inline connector |
| Conductor connection | |
| Connection method | Spring-cage connection |
| Conductor cross-section rigid | 0.08 mm ² ... 1.5 mm ² |
| Conductor cross-section flexible | 0.08 mm ² ... 1.5 mm ² |
| Conductor cross-section AWG | 28 ... 16 |
| Stripping length | 8 mm |

Inline connector

| | |
|-----------------------------------|--|
| Connection method | Spring-cage connection |
| Conductor cross-section, rigid | 0.08 mm ² ... 1.5 mm ² |
| Conductor cross-section, flexible | 0.08 mm ² ... 1.5 mm ² |
| Conductor cross-section AWG | 28 ... 16 |
| Stripping length | 8 mm |

Environmental and real-life conditions

| | |
|--------------------|--|
| Ambient conditions | |
|--------------------|--|

IB IL 24/230 DOR4/W-PAC - Relay module



2861878

<https://www.phoenixcontact.com/us/products/2861878>

| | |
|--|--|
| Ambient temperature (operation) | -25 °C ... 55 °C |
| Degree of protection | IP20 |
| Air pressure (operation) | 70 kPa ... 106 kPa (up to 3000 m above sea level) |
| Air pressure (storage/transport) | 70 kPa ... 106 kPa (up to 3000 m above sea level) |
| Ambient temperature (storage/transport) | -25 °C ... 85 °C |
| Permissible humidity (operation) | 0 % ... 85 % (in the range of -25°C ... +55°C, appropriate measures against increased humidity (> 85%) must be taken.) |
| Permissible humidity (storage/transport) | 0 % ... 85 % (slight temporary condensation may sometimes appear on the housing) |

Standards and regulations

| | |
|------------------|-------------------------------------|
| Protection class | I (IEC 61140, EN 61140, VDE 0140-1) |
|------------------|-------------------------------------|

Mounting

| | |
|---------------|-------------------|
| Mounting type | DIN rail mounting |
|---------------|-------------------|

IB IL 24/230 DOR4/W-PAC - Relay module




2861878


<https://www.phoenixcontact.com/us/products/2861878>

Drawings

Dimensional drawing

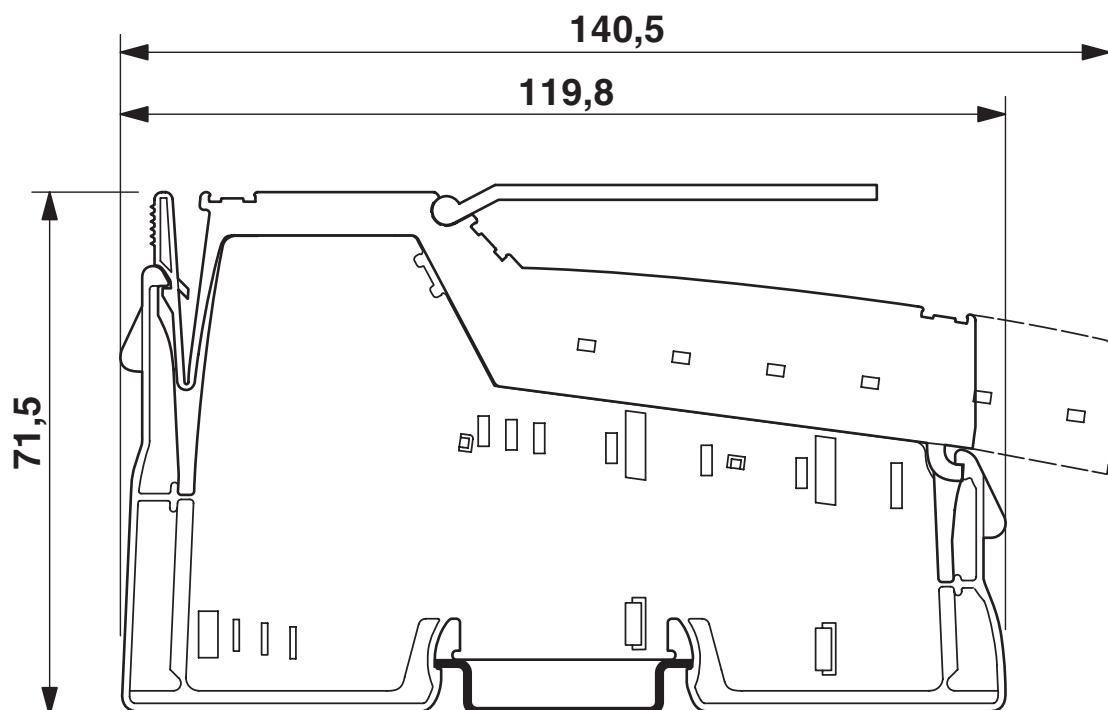


Connection diagram

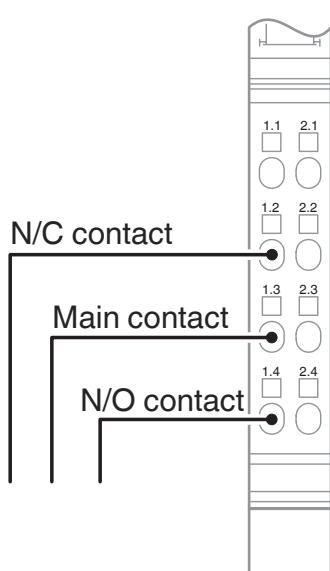

IB IL 24/230 DOR4/W-PAC - Relay module

2861878

<https://www.phoenixcontact.com/us/products/2861878>

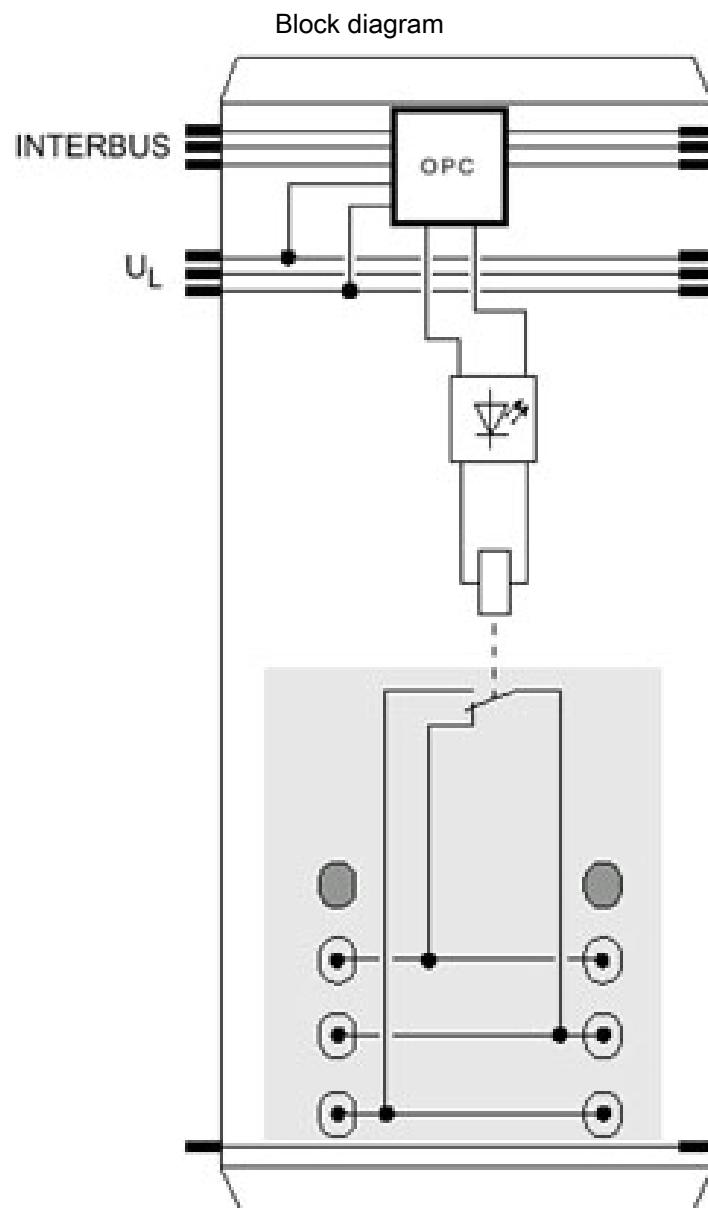

IB IL 24/230 DOR4/W-PAC - Relay module

2861878

<https://www.phoenixcontact.com/us/products/2861878>



Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2861878>



DNV GL

Approval ID: TAA00000BN



LR

Approval ID: LR23398855TA



BV

Approval ID: 21725/C1 BV



BSH

Approval ID: 658a



RINA

Approval ID: ELE121121XG



ABS

Approval ID: 22-2226444-PDA



cULus Recognized

Approval ID: E140324

IB IL 24/230 DOR4/W-PAC - Relay module

2861878

<https://www.phoenixcontact.com/us/products/2861878>



Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27242604 |
| ECLASS-15.0 | 27242604 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001599 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 32151600 |
|-------------|----------|

IB IL 24/230 DOR4/W-PAC - Relay module

2861878

<https://www.phoenixcontact.com/us/products/2861878>



Environmental product compliance

EU RoHS

| | |
|---|--------------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 7(a), 7(c)-I |

China RoHS

| | |
|---|---------|
| Environment friendly use period (EFUP) | EFUP-50 |
| An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. | |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | aa33a80b-10d2-497c-9332-4cda31e84913 |

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA

586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com