

ST-REL4-KG120/21-21 - Relay connectors



2823337

<https://www.phoenixcontact.com/us/products/2823337>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Relay connector, equipped with miniature switching relay, contacts (AgNi): medium to large loads, 2 changeover contacts, input voltage 120 V AC/DC, with LED display, pluggable into basic terminal blocks

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2823337 |
| Packing unit | 10 pc |
| Minimum order quantity | 1 pc |
| Sales key | C460 |
| Product key | DK61B2 |
| GTIN | 4017918077358 |
| Weight per piece (including packing) | 47.4 g |
| Weight per piece (excluding packing) | 47.4 g |
| Customs tariff number | 85364900 |
| Country of origin | DE |

ST-REL4-KG120/21-21 - Relay connectors

2823337

<https://www.phoenixcontact.com/us/products/2823337>



Technical data

Product properties

| | |
|-------------------------|--------------------------------|
| Product type | Relay Module |
| Operating mode | 100% operating factor |
| Mechanical service life | approx. 2×10^7 cycles |

Data management status

| | |
|------------------------------|------------|
| Date of last data management | 12.09.2025 |
|------------------------------|------------|

Electrical properties

| | |
|--|--|
| Maximum power dissipation for nominal condition | 0.48 W |
| Test voltage (Winding/contact) | 2.5 kV AC (50 Hz, 1 min., winding/contact) |
| Test voltage (Changeover contact/changeover contact) | 1 kV AC (50 Hz, 1 min., changeover contact/changeover contact) |

Input data

Coil side

| | |
|--------------------------------|--------------------------------------|
| Nominal input voltage U_N | 120 V AC/DC |
| Input voltage range | 96 V AC/DC ... 127.2 V AC/DC (20 °C) |
| Drive and function | monostable |
| Drive (polarity) | polarized |
| Typical input current at U_N | 4 mA |
| Typical response time | 10 ms (with DC) |
| Typical release time | 10 ms (with DC) |
| Protective circuit | Bridge rectifier, varistor |
| Operating voltage display | yes |

Output data

Switching

| | |
|---------------------------------------|--|
| Contact switching type | 2 changeover contacts |
| Type of switch contact | Single contact |
| Contact material | AgNi |
| Maximum switching voltage | 250 V AC/DC |
| Limiting continuous current | 3 A |
| Maximum inrush current | 5 A |
| Interrupting rating (ohmic load) max. | 70 W (at 24 V DC) 85 W (at 48 V DC) 60 W (at 60 V DC) 40 W (at 110 V DC) 60 W (at 220 V DC) 750 VA (for 250 V AC) |

Dimensions

ST-REL4-KG120/21-21 - Relay connectors

2823337

<https://www.phoenixcontact.com/us/products/2823337>



| | |
|--------|---------|
| Width | 27 mm |
| Height | 33 mm |
| Depth | 66.5 mm |

Material specifications

| | |
|-------|------------------|
| Color | green (RAL 6021) |
|-------|------------------|

Environmental and real-life conditions

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |

Standards and regulations

| | |
|-----------------------|--|
| Standards/regulations | DIN VDE 0110b, Gr. C for 250 V DC |
| | IEC 60255/DIN VDE 0435 (in relevant parts) |
| | DIN EN 50178/VDE 0160 (in relevant parts) |
| | EN 60730/DIN VDE 0631 |
| | DIN VDE 0160 (in relevant parts) |

Mounting

| | |
|---------------|------------------|
| Mounting type | Plug-in mounting |
|---------------|------------------|


ST-REL4-KG120/21-21 - Relay connectors

2823337

<https://www.phoenixcontact.com/us/products/2823337>



Drawings

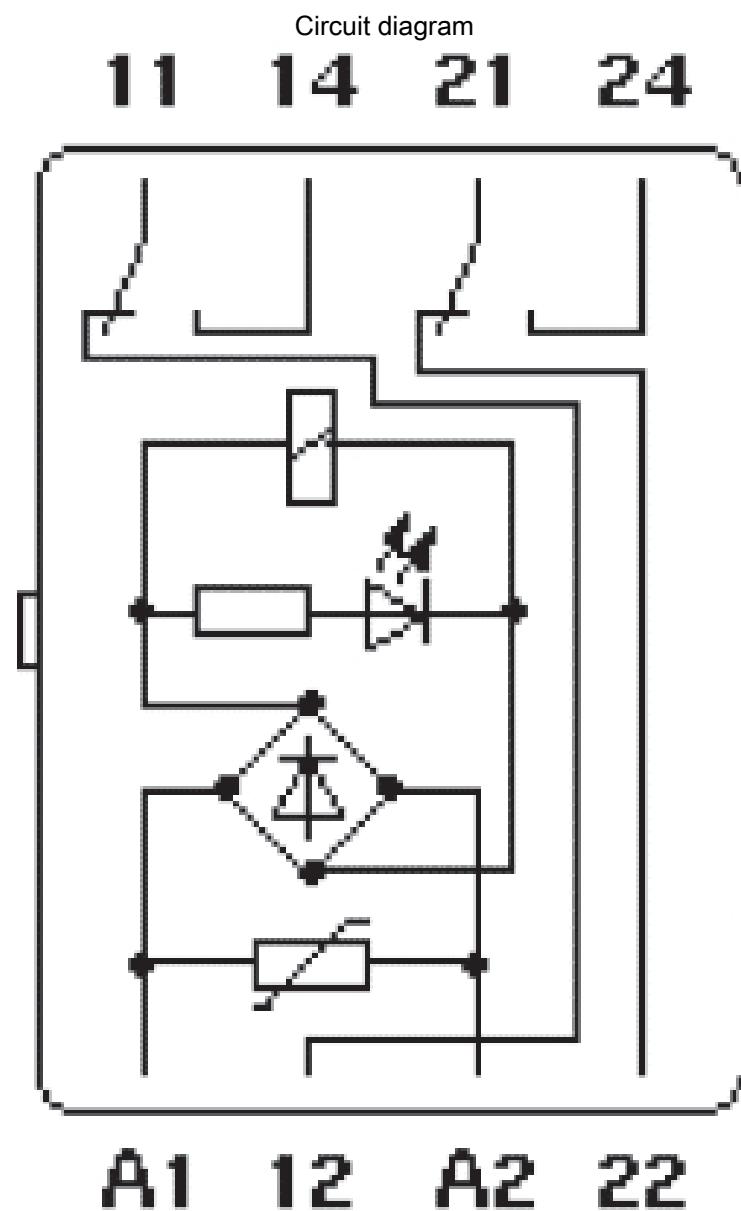

ST-REL4-KG120/21-21 - Relay connectors

2823337

<https://www.phoenixcontact.com/us/products/2823337>



Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2823337>



EAC

Approval ID: RU*C-DE.*08.B.00010

ST-REL4-KG120/21-21 - Relay connectors

2823337

<https://www.phoenixcontact.com/us/products/2823337>



Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27371601 |
| ECLASS-15.0 | 27371601 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001437 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39122300 |
|-------------|----------|

ST-REL4-KG120/21-21 - Relay connectors

2823337

<https://www.phoenixcontact.com/us/products/2823337>



Environmental product compliance

EU RoHS

| | |
|---|--------------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 7(a), 7(c)-I |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|---|
| REACH candidate substance (CAS No.) | Hexahydromethylphthalic anhydride(CAS: n/a) |
| | Lead(CAS: 7439-92-1) |
| SCIP | 1d0bc82c-21ee-4cb0-a76c-ab43d9b74ec8 |

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com