

# IFS-BT-PROG-ADAPTER - Adapter



2905872

<https://www.phoenixcontact.com/us/products/2905872>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Bluetooth adapter with micro USB and S-PORT interface for wireless communication with the MINI Analog, MINI Analog Pro, MACX Analog, Interface System Gateways, and PLC logic device series.

## Product description

Bluetooth adapter with micro USB and S-PORT interface for wireless programming and/or monitoring. The adapter can be used for the following device series with programming interface: MINI Analog, MINI Analog Pro, MACX Analog, Interface System Gateways, PLC logic (monitoring only). The driver is included in the software solutions for the products to be programmed, such as measuring transducers.

## Commercial data

Item number	2905872
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	C404
Product key	DK112Z
GTIN	4055626003917
Weight per piece (including packing)	44.4 g
Weight per piece (excluding packing)	34.8 g
Customs tariff number	84719000
Country of origin	DE

# IFS-BT-PROG-ADAPTER - Adapter

2905872

<https://www.phoenixcontact.com/us/products/2905872>



## Technical data

### Product properties

Product type	Programming adapter
--------------	---------------------

### Electrical properties

#### Supply

Supply voltage	3.3 V
----------------	-------

### Connection data

#### Device side

Connection method	Micro USB type B
-------------------	------------------

#### Device side

Connection method	S-PORT
-------------------	--------

#### Adapter side

Connection method	Micro USB type B
-------------------	------------------

#### Adapter side

Connection method	S-PORT
-------------------	--------

### Dimensions

Width	38 mm
Height	30.6 mm
Depth	9.6 mm

### Material specifications

Housing material	PA 646
------------------	--------

### Environmental and real-life conditions

#### Ambient conditions

Ambient temperature (operation)	-25 °C ... 65 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C
Altitude	≤ 2000 m
Max. permissible relative humidity (operation)	< 95 %

### Approvals

#### FCC

Certificate	YG3-IFSPROG
-------------	-------------

#### IC

Certificate	4720B-IFSPROG
-------------	---------------

# IFS-BT-PROG-ADAPTER - Adapter



2905872

<https://www.phoenixcontact.com/us/products/2905872>

MIC

Identification	Japan MIC (RF) ID:007-AB0221
----------------	------------------------------

Shipbuilding data

Temperature	B
Humidity	B
Vibration	A
EMC	A
Enclosure	Required protection according to the Rules shall be provided upon installation on board

# IFS-BT-PROG-ADAPTER - Adapter


2905872

<https://www.phoenixcontact.com/us/products/2905872>




## Drawings

Schematic diagram

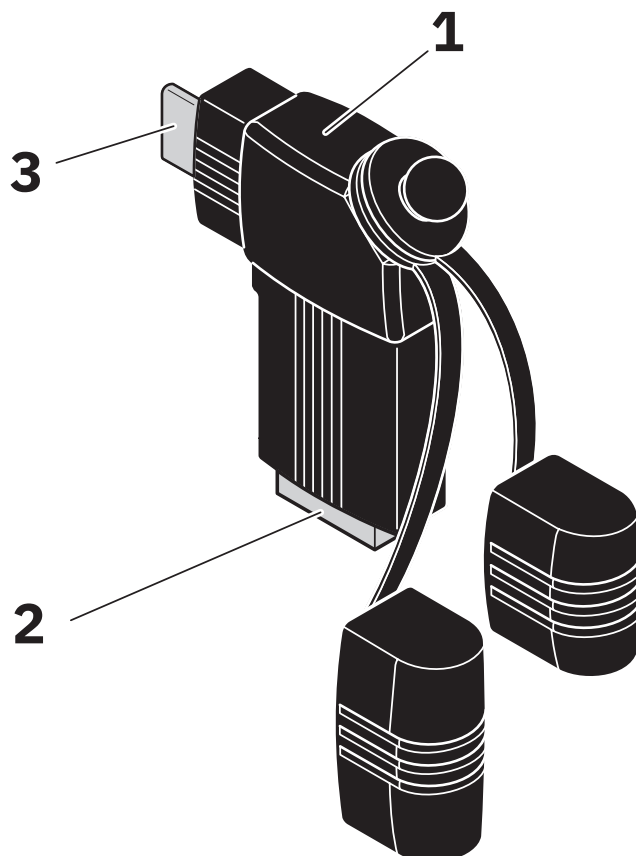

- 1 Device adapter
- 2 S-PORT interface
- 3 PC adapter
- 4  $\mu$ USB interface

Schematic diagram

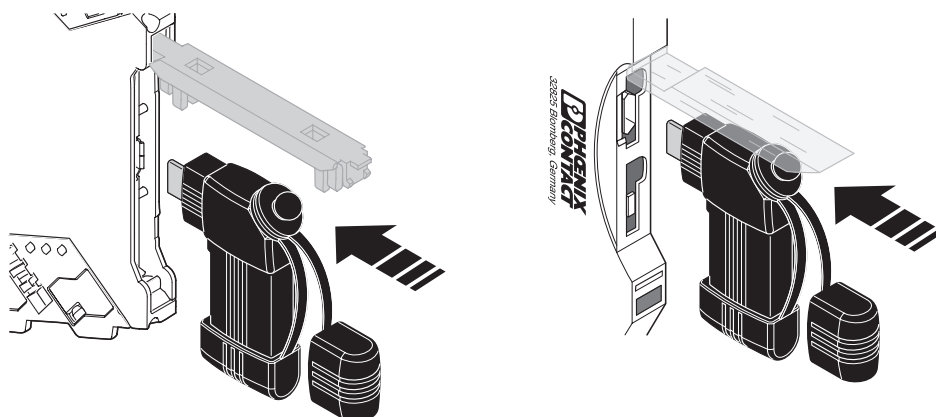

Connection to MINI Analog and MINI Analog Pro


# IFS-BT-PROG-ADAPTER - Adapter

2905872

<https://www.phoenixcontact.com/us/products/2905872>



Schematic diagram

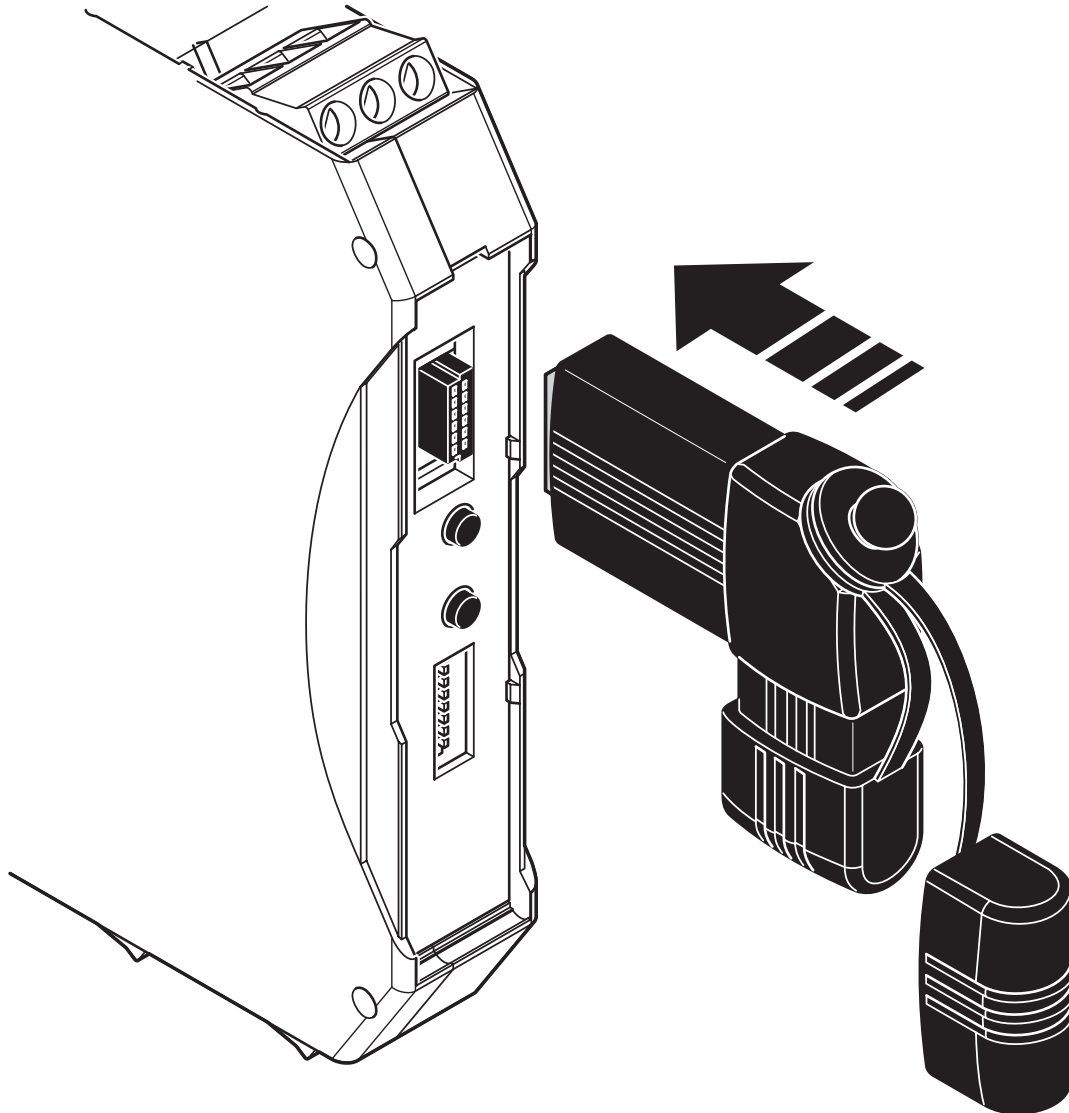


Connection to MACX Analog and INTERFACE system gateways

# IFS-BT-PROG-ADAPTER - Adapter

2905872

<https://www.phoenixcontact.com/us/products/2905872>

Schematic diagram

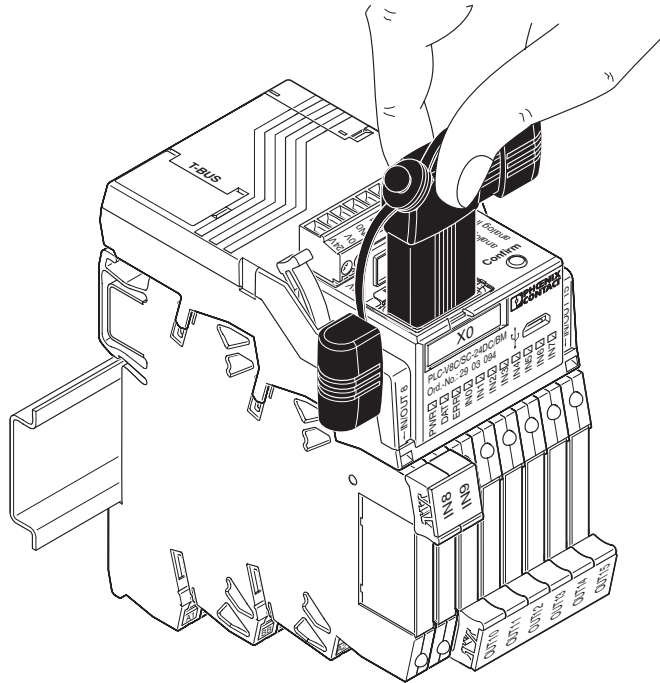

Connection to PLC logic

# IFS-BT-PROG-ADAPTER - Adapter

2905872

<https://www.phoenixcontact.com/us/products/2905872>



## Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2905872>



**EAC**

Approval ID: RU C-DE.A\*08.B.01837

**DNV**

Approval ID: TAA000021E

# IFS-BT-PROG-ADAPTER - Adapter

2905872

<https://www.phoenixcontact.com/us/products/2905872>



## Classifications

### ECLASS

ECLASS-13.0	27371392
ECLASS-15.0	27371392

### ETIM

ETIM 9.0	EC002498
----------	----------

### UNSPSC

UNSPSC 21.0	39121100
-------------	----------



# IFS-BT-PROG-ADAPTER - Adapter



2905872

<https://www.phoenixcontact.com/us/products/2905872>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)