

1032276

<https://www.phoenixcontact.com/us/products/1032276>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power connector, degree of protection: IP65/IP67, number of positions: 5, material: Die-cast zinc, cable outlet: straight, Universal

## Your advantages

- Increased temperature range
- Lockable
- One-part housing

## Commercial data

Item number	1032276
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	ABNOHA
GTIN	4055626534961
Weight per piece (including packing)	116.092 g
Weight per piece (excluding packing)	116.092 g
Country of origin	PL

## Technical data

### Notes

General	This product corresponds to the PROFINET Cabling and Interconnection Technology Guideline for PROFINET regulations, version 2.00, order no: 2.252, Chapter 11 Connectors for 24 Volt Power Supply Cabling and Chapter 13 Application specific Cabling and Interconnection Technology (AIDA)
---------	---

### Product properties

Product type	Data cable preassembled
Type	MSTB
Sensor type	Universal
Number of positions	5
Connection profile	MSTB
Cable outlet	straight

### Insulation characteristics

Degree of pollution	3
---------------------	---

### Electrical properties

Nominal voltage $U_N$	24 V
Nominal current $I_N$	16 A

### Material specifications

Material	Metal
Flammability rating according to UL 94	V0
Seal material	NBR
Housing material	Die-cast zinc
Housing surface material	nickel-plated
Cable seal material	TPE
Contact material	Copper alloy
Contact surface material	Gold over nickel
Contact carrier material	PA

### Dimensions

Width	31 mm
Height	36 mm
Length	67 mm

### Cable/line

External cable diameter	9 mm ... 13 mm
-------------------------	----------------

### Environmental and real-life conditions

# CUC-PPC-C2ZNI-SX/24FKP5:WO - Power connector

1032276

<https://www.phoenixcontact.com/us/products/1032276>



## Ambient conditions


Degree of protection	IP65/IP67
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Ambient temperature (assembly)	-10 °C ... 40 °C

1032276

<https://www.phoenixcontact.com/us/products/1032276>

## Drawings

Schematic diagram

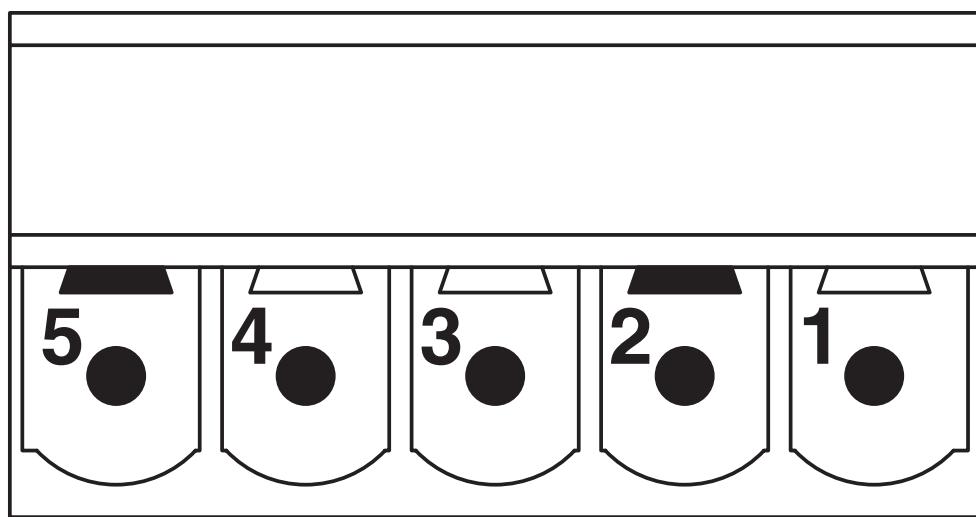

Pin assignment PROFINET push-pull, power connector, 24 V, fixed coding

## Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1032276>

cULus Recognized				
Approval ID: E118976-20080903				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$
keine	24 V	16 A	- 14	-

## Classifications

### ECLASS

ECLASS-13.0	27440114
ECLASS-15.0	27440114

### ETIM

ETIM 9.0	EC002636
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA

586 Fulling Mill Road

Middletown, PA 17057, United States

(+717) 944-1300

[info@phoenixcon.com](mailto:info@phoenixcon.com)