

# SACB- 8/3-L-1,5PUR-M8 - Distributor box



1030880

<https://www.phoenixcontact.com/in/products/1030880>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Distributor box, application: Standard, number of slots: 8, number of positions: 3, coding: A, slot assignment: single, status display: yes, PNP; master cable connection: Fixed connection 180°, cable length: 1.5 m

## Your advantages

- Safety in the field, thanks to molded housing and high degree of protection
- Convenient: increased machine availability thanks to quick and easy diagnostics

## Commercial data

Item number	1030880
Packing unit	1 pc
Minimum order quantity	100 pc
Product key	AF3BCA
GTIN	4055626534718
Weight per piece (including packing)	22.22 g
Weight per piece (excluding packing)	22.22 g
Country of origin	PL

# SACB- 8/3-L-1,5PUR-M8 - Distributor box

1030880

<https://www.phoenixcontact.com/in/products/1030880>



## Technical data

### Notes

Assembly note	<b>NOTE:</b> Observe the permissible bending radii when routing cables, since the degree of protection may be at risk if the bending forces are too high. Reduce mechanical loads upstream of the connector, e.g., by using cable ties.
Note on application	Unused slots are to be sealed off prior to commissioning. Suitable sealing elements are to be found under "Accessories".

### Product properties

Product type	Distributor box
Application	Standard
Number of positions	3
Number of slots	8
Coding	A

### System properties

Local diagnostics	
Monitored function	Supply voltage
Optical representation	Green LED

### Electrical properties

Max. operating voltage $U_{max}$	30 V DC
Local diagnostics	Supply voltage Green LED
Nominal voltage $U_N$	24 V DC
Rated current, total	6 A
Max. current carrying capacity per path	2 A
Current carrying capacity per slot	2 A

### Connection data

Conductor connection	
Tightening torque slot sensor/actuator cable	0.2 Nm

### Signaling

Status display present	yes
------------------------	-----

### Dimensions

Dimensional drawing	
---------------------	--

# SACB- 8/3-L-1,5PUR-M8 - Distributor box

1030880

<https://www.phoenixcontact.com/in/products/1030880>



Width	30 mm
Height	22 mm
Length	141 mm

## Material specifications

Material Threaded sleeve	Cu alloy
Material Housing	PBT
Material Molding compound	PUR
Flammability rating according to UL 94	V0
Seal material O-ring	NBR
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	PA

## Cable/line

Cable length	1.5 m
--------------	-------

PUR/PVC black [PUR]	
---------------------	--

### Dimensional drawing



Cable weight	92 kg/km
UL AWM Style	20549
Number of positions	10
Shielded	no
Cable type	PUR/PVC black [PUR]
Conductor structure signal line	19x 0.15 mm
AWG signal line	22
Conductor structure, voltage supply	42x 0.15 mm
AWG power supply	18
Conductor cross section	8x 0.34 mm <sup>2</sup> (Signal line) 2x 0.75 mm <sup>2</sup> (power line)
Wire diameter incl. insulation	1.3 mm ±0.1 mm (Signal line) 1.8 mm ±0.1 mm (power line)
External cable diameter	7.90 mm ±0.2 mm
Outer sheath, material	PUR
External sheath, color	black RAL 9005
Conductor material	Bare Cu litz wires
Material wire insulation	PVC

# SACB- 8/3-L-1,5PUR-M8 - Distributor box

1030880

<https://www.phoenixcontact.com/in/products/1030880>



Single wire, color	brown, blue, white, green, yellow, gray, pink, red, black, violet
Inner sheath thickness	≥ 0.15 mm
Thickness, outer sheath	≥ 0.38 mm
Overall twist	Wires twisted in layers
Nominal voltage, cable	300 V
Test voltage	2000 V
Minimum bending radius, fixed installation	7.5 x D
Minimum bending radius, flexible installation	10 x D
Smallest bending radius, fixed installation	60 mm
Smallest bending radius, movable installation	79 mm
Dynamic load capacity (bending)	Max. bending cycles: 1500000, Bending radius: 79 mm, Traversing path: 2 m, Traversing rate: 2 m/s
Flame resistance	DIN EN 50265
Resistance to oil	according to VDE 0472 Part 803
Other resistance	Highly resistant to acids, alkaline solutions and solvents
Special properties	Silicone-free
Ambient temperature (operation)	-40 °C ... 90 °C (cable, fixed installation) -5 °C ... 80 °C (Cable, flexible installation) 80 °C (in acc. with UL)

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-30 °C ... 80 °C

## Standards and regulations

Standard designation	M8 connector
Standards/specifications	IEC 61076-2-104

# SACB- 8/3-L-1,5PUR-M8 - Distributor box


1030880

<https://www.phoenixcontact.com/in/products/1030880>




## Drawings

Dimensional drawing

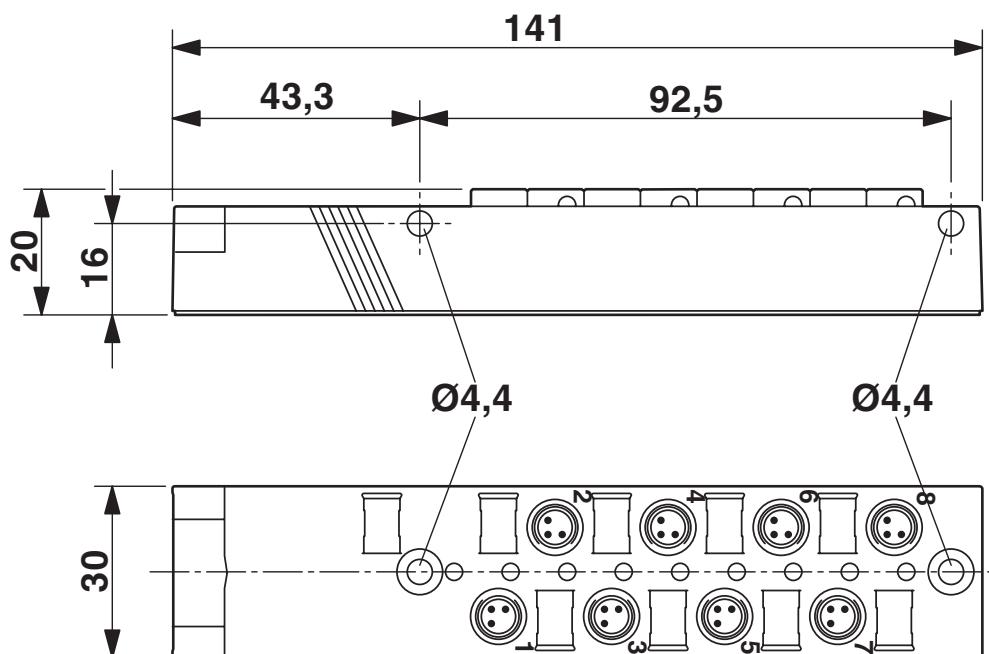

Schematic diagram

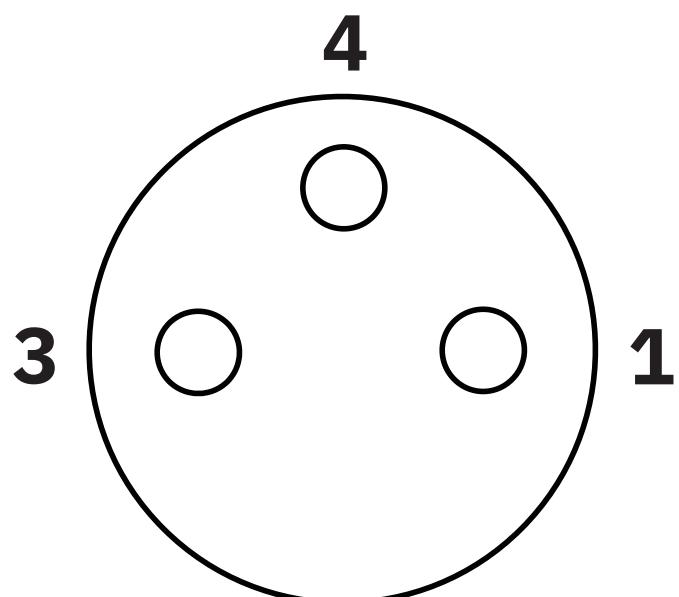

M8 slot, socket, 3-pos.


## SACB- 8/3-L-1,5PUR-M8 - Distributor box

1030880

<https://www.phoenixcontact.com/in/products/1030880>

**PHÖNIX CONTACT**

## Circuit diagram

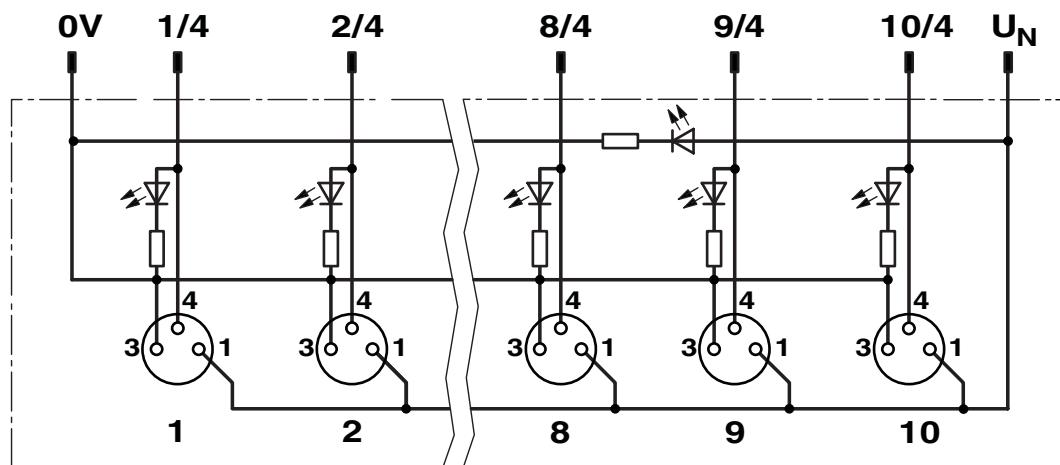

# SACB- 8/3-L-1,5PUR-M8 - Distributor box

1030880

<https://www.phoenixcontact.com/in/products/1030880>



## Classifications

### ECLASS

ECLASS-13.0	27440108
ECLASS-15.0	27440108

### UNSPSC

UNSPSC 21.0	31251501
-------------	----------

# SACB- 8/3-L-1,5PUR-M8 - Distributor box

1030880

<https://www.phoenixcontact.com/in/products/1030880>



## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
-------------------------------------	----------------------

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)