

ICS25-C100X12-DKP-7035 - Upper housing part with display



1215686

<https://www.phoenixcontact.com/us/products/1215686>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

DIN rail housing, Upper part, integrated 0.96" display, resolution: 80 x 160 Pixel(s), interface: 4-wire SPI half duplex, Housing cover, width: 25 mm, height: 100 mm, depth: 14.35 mm



Your advantages

- Housing system for visualization and operation in the control cabinet
- Coordinated housings with pre-installed touch displays
- Time-saving assembly of ready-to-use modules with Plug and Play
- Positioning of the display using the configurator

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1215686 |
| Packing unit | 10 pc |
| Minimum order quantity | 10 pc |
| Sales key | NULL |
| Product key | ACHAEI |
| GTIN | 4063151296902 |
| Weight per piece (including packing) | 18.24 g |
| Weight per piece (excluding packing) | 10.9 g |
| Customs tariff number | 84879090 |
| Country of origin | CN |

ICS25-C100X12-DKP-7035 - Upper housing part with display



1215686

<https://www.phoenixcontact.com/us/products/1215686>

Technical data

Notes

| | |
|---------------|---|
| Assembly note | Please observe the application note in the download area. |
|---------------|---|

Product properties

| | |
|------------------------------|--------------------|
| Product type | Upper housing part |
| Housing type | DIN rail housing |
| Housing series | ICS |
| Product family | ICS25-..100X.. |
| Ventilation openings present | no |


Display

| | |
|-----------------------|-----------------------|
| Display type | Color display TFT |
| Display type | LCD with backlighting |
| Panel technology | IPS |
| Diagonal | 0.96 in. (Display) |
| Screen resolution | 80 x 160 Pixel(s) |
| Display lighting type | LED, white |
| Controller | ST7735S |

Interfaces

| | |
|-----------|------------------------|
| Interface | 4-wire SPI half duplex |
|-----------|------------------------|

Dimensions
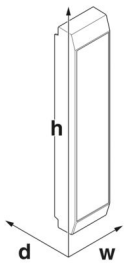
| | |
|---------------------------------|---|
| Dimensional drawing |  |
| Width | 25 mm |
| Height | 100 mm |
| Depth | 14.35 mm |
| Depth from base support surface | 11.9 mm |

PCB design

| | |
|---------------|-------------------|
| PCB thickness | 1.4 mm ... 1.8 mm |
|---------------|-------------------|

Material specifications

| | |
|-----------------------------|-----------------------|
| Color (Housing) | light gray (RAL 7035) |
| Material Upper housing part | PA |

ICS25-C100X12-DKP-7035 - Upper housing part with display



1215686

<https://www.phoenixcontact.com/us/products/1215686>

| | |
|--|-----------|
| Flammability rating according to UL 94 | V0 |
| CTI according to IEC 60112 | 600 |
| Surface characteristics | untreated |

Environmental and real-life conditions

Vibration test

| | |
|------------------------|-----------------------------|
| Specification | IEC 60068-2-6:2007-12 |
| Result | Test passed |
| Frequency | 10 - 150 - 10 Hz |
| Sweep speed | 1 octave/min |
| Amplitude | 0.15 mm (10 Hz ... 58.1 Hz) |
| Acceleration | 20 m/s ² |
| Test duration per axis | 2.5 h |
| Test directions | X-, Y- and Z-axis |

Shocks

| | |
|--------------------------------|-----------------------------------|
| Specification | IEC 60068-2-27:2008-02 |
| Result | Test passed |
| Acceleration | 150 m/s ² |
| Shock duration | 11 ms |
| Number of shocks per direction | 3 |
| Test directions | X-, Y- and Z-axis (pos. and neg.) |

Test for substances that would hinder coating with paint or varnish

| | |
|---------------|--------------------|
| Specification | VDMA 24364:2018-05 |
| Result | Test passed |

Ambient conditions

| | |
|---|---|
| Max. IP code to attain | IP20 |
| Ambient temperature (operation) | -20 °C ... 70 °C (depending on power dissipation) |
| Ambient temperature (storage/transport) | -20 °C ... 55 °C |
| Relative humidity (storage/transport) | 80 % |

PCB data

| | |
|----------------------|-------------------|
| Thickness of the PCB | 1.4 mm ... 1.8 mm |
|----------------------|-------------------|

Mounting

| | |
|---------------|---------|
| Mounting type | Snap in |
|---------------|---------|

Packaging specifications

| | |
|----------------------|---------------------|
| Type of packaging | packed in cardboard |
| Outer packaging type | Carton |

ICS25-C100X12-DKP-7035 - Upper housing part with display




1215686

<https://www.phoenixcontact.com/us/products/1215686>

Drawings

Dimensional drawing

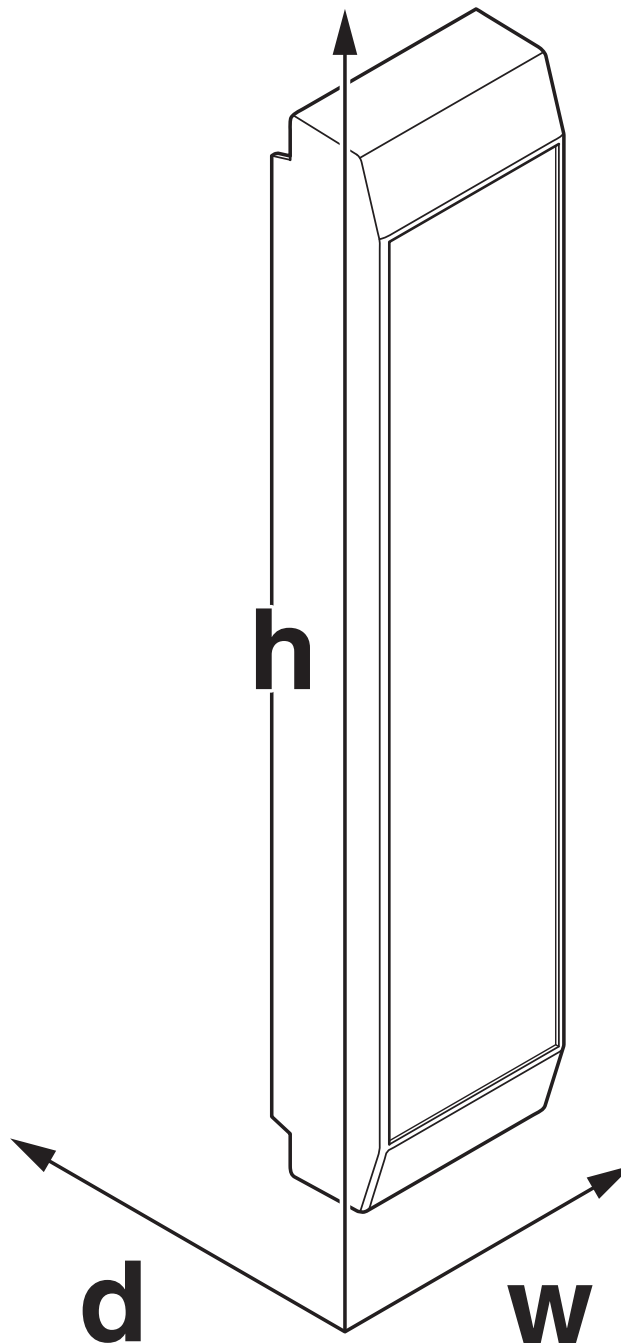

Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the "Downloads" tab.

ICS25-C100X12-DKP-7035 - Upper housing part with display



1215686

<https://www.phoenixcontact.com/us/products/1215686>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27190603 |
| ECLASS-15.0 | 27190603 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC002779 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 31261500 |
|-------------|----------|

1215686
<https://www.phoenixcontact.com/us/products/1215686>

Environmental product compliance

| | |
|---|--|
| EU RoHS | |
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com