

ME 12,5-KIT-MSTBO-7035+4PSPT2 - Housing set



1343026

<https://www.phoenixcontact.com/us/products/1343026>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



DIN rail housing, for mounting on a DIN rail, closed upper housing part, color: light gray (similar RAL 7035), width: 12.6 mm, height: 99 mm, depth: 113.3 mm, incl. 4 PCB connectors, 2-pos., Push-in spring connection, for 2.5 mm², nominal current: 12 A, 320 V, PCB surface: 7800 mm²

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1343026 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | AC08 |
| Product key | ACHAAK |
| GTIN | 4063151654368 |
| Weight per piece (including packing) | 78 g |
| Weight per piece (excluding packing) | 53 g |
| Customs tariff number | 85369010 |
| Country of origin | DE |

ME 12,5-KIT-MSTBO-7035+4PSPT2 - Housing set



1343026

<https://www.phoenixcontact.com/us/products/1343026>

Set consists of

ME 12,5 UT/FE KMGY - Mounting base housing

2202695

<https://www.phoenixcontact.com/us/products/2202695>



DIN rail housing, Lower housing part with metal foot catch, with FE contact, tall design, with vents, width: 12.6 mm, height: 99 mm, depth: 107.3 mm, color: light gray (similar RAL 7035), cross connection: without bus connector, number of positions cross connector: not relevant

ME 12,5 OT-MSTBO KMGY - Upper housing part

2854775

<https://www.phoenixcontact.com/us/products/2854775>



DIN rail housing, Upper housing part for connectors with header, width: 12.6 mm, height: 99 mm, depth: 45.85 mm, color: light gray (similar RAL 7035)

ME 12,5-KIT-MSTBO-7035+4PSPT2 - Housing set



1343026

<https://www.phoenixcontact.com/us/products/1343026>

MSTBO 2,5/ 2-G1L KMGY - PCB header

2854788

<https://www.phoenixcontact.com/us/products/2854788>



PCB headers, nominal cross section: 2.5 mm², color: light gray, nominal current: 12 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Pin, number of potentials: 2, number of rows: 1, number of positions: 2, number of connections: 2, product range: MSTBO 2,5/...-G1L, pitch: 5 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.5 mm, number of solder pins per potential: 1, plug-in system: COMBICON MSTB 2,5, Pin connector pattern alignment: Orthogonal, locking: without, type of packaging: packed in cardboard, Product with pin output on left side

MSTBO 2,5/ 2-G1R KMGY - PCB header

2854791

<https://www.phoenixcontact.com/us/products/2854791>



PCB headers, nominal cross section: 2.5 mm², color: light gray, nominal current: 12 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Pin, number of potentials: 2, number of rows: 1, number of positions: 2, number of connections: 2, product range: MSTBO 2,5/...-G1R, pitch: 5 mm, connection method: pluggable, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.5 mm, number of solder pins per potential: 1, plug-in system: COMBICON MSTB 2,5, Pin connector pattern alignment: Orthogonal, locking: without, type of packaging: packed in cardboard, Product with pin output on right side

ME 12,5-KIT-MSTBO-7035+4PSPT2 - Housing set



1343026

<https://www.phoenixcontact.com/us/products/1343026>

PSPT 2,5/ 2-ST KMGY - PCB connector

2202346

<https://www.phoenixcontact.com/us/products/2202346>



PCB connector, nominal cross section: 2.5 mm², color: light gray, nominal current: 16 A, rated voltage (III/2): 300 V, contact surface: Sn, contact connection type: Socket, number of potentials: 2, number of rows: 1, number of positions: 2, number of connections: 2, product range: PSPT 2,5/..-ST, pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, locking: without, mounting method: without, type of packaging: packed in cardboard, Color of the spring lever: orange

ME 12,5-KIT-MSTBO-7035+4PSPT2 - Housing set



1343026

<https://www.phoenixcontact.com/us/products/1343026>

Technical data

Notes

| | |
|----------------|---|
| Assembly note | Please observe the assembly instructions available in the download area. |
| Recommendation | Material of contact pads for bus connector, galvanic gold (hard gold) |
| General | The PCB surface specification is for orientation purposes and is based on a basic PCB. The housing can also accommodate several PCBs. |


Product properties

| | |
|------------------------------|-----------------------|
| Product type | Stackable housing set |
| Housing type | DIN rail housing |
| Housing series | ME |
| Number of positions | 8 |
| Max. number of positions | 8 (pitch: 5 mm) |
| Number of rows | 2 |
| Ventilation openings present | yes |

Connection data

| | |
|-------------------|---------------------------|
| Connection method | Push-in spring connection |
|-------------------|---------------------------|

Dimensions
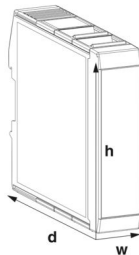
| | |
|---------------------------------|---|
| Dimensional drawing |  |
| Width | 12.6 mm |
| Height | 99 mm |
| Depth | 113.3 mm |
| Depth from top edge of DIN rail | 107 mm |

PCB design

| | |
|---------------|-------------------|
| PCB thickness | 1.4 mm ... 1.8 mm |
|---------------|-------------------|

Material specifications

| | |
|--|-----------------------|
| Color (Housing) | light gray (RAL 7035) |
| Material | PA |
| Flammability rating according to UL 94 | V0 |
| Surface characteristics | untreated |

ME 12,5-KIT-MSTBO-7035+4PSPT2 - Housing set



1343026

<https://www.phoenixcontact.com/us/products/1343026>

Environmental and real-life conditions

Ambient conditions

| | |
|---|--|
| Max. IP code to attain | IP20 |
| Ambient temperature (operation) | -40 °C ... 105 °C (depending on power dissipation) |
| Ambient temperature (storage/transport) | -40 °C ... 55 °C |
| Ambient temperature (assembly) | -5 °C ... 100 °C |
| Relative humidity (storage/transport) | max. 80 % |

PCB data

| | |
|-----------------------|----------------------|
| Number of PCB holders | 1 |
| Type of PCB mount | Latching |
| Total PCB surface | 7800 mm ² |
| Thickness of the PCB | 1.4 mm ... 1.8 mm |

Mounting


| | |
|---------------|-------------------|
| Mounting type | DIN rail mounting |
|---------------|-------------------|

Packaging specifications

| | |
|----------------------|---------------------|
| Type of packaging | packed in cardboard |
| Outer packaging type | Carton |

Drawings

Dimensional drawing

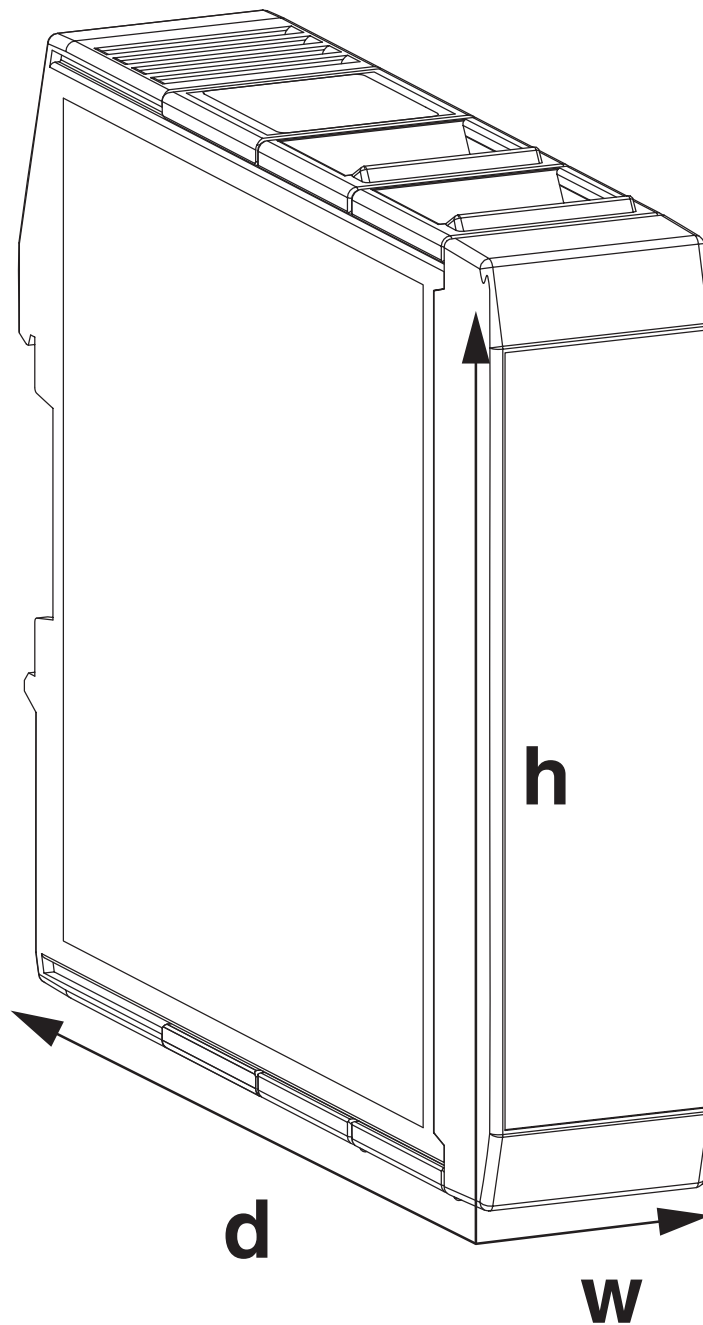

Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the "Downloads" tab.

ME 12,5-KIT-MSTBO-7035+4PSPT2 - Housing set



1343026

<https://www.phoenixcontact.com/us/products/1343026>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-15.0 | 27190301 |
| ECLASS-13.0 | 27190301 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001031 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 31261500 |
|-------------|----------|

ME 12,5-KIT-MSTBO-7035+4PSPT2 - Housing set



1343026

<https://www.phoenixcontact.com/us/products/1343026>

Environmental product compliance

| | |
|---|--|
| EU RoHS | |
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com