

SAC-4P-M12MS/ 1,5-PUR/M12FS SH - Sensor/actuator cable



1500868

<https://www.phoenixcontact.com/us/products/1500868>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 4-position, PUR halogen-free, black-gray RAL 7021, shielded (Advanced Shielding Technology), Plug straight M12, coding: A, on Socket straight M12, coding: A, cable length: 1.5 m

Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Reliable signal transmission – 360° shielding in environments with electromagnetic interference

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1500868 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | BF03 |
| Product key | AF1CJA |
| GTIN | 4017918612269 |
| Weight per piece (including packing) | 89.8 g |
| Weight per piece (excluding packing) | 84.08 g |
| Customs tariff number | 85444290 |
| Country of origin | PL |

SAC-4P-M12MS/ 1,5-PUR/M12FS SH - Sensor/actuator cable



1500868

<https://www.phoenixcontact.com/us/products/1500868>

Technical data

Product properties

| | |
|----------------------|-----------------------|
| Product type | Sensor/actuator cable |
| Application | Standard |
| Number of positions | 4 |
| No. of cable outlets | 1 |
| Shielded | yes |
| Coding | A |

Insulation characteristics

| | |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution | 3 |

Material specifications

| | |
|--|---|
| Flammability rating according to UL 94 | HB |
| Seal material | NBR |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material for screw connection | Zinc die-cast, nickel-plated |

Electrical properties

| | |
|-----------------------|----------------------------|
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage U_N | 48 V AC |
| | 60 V DC |

Mechanical properties

Mechanical data

| | |
|-----------------------------|------------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|------------|

Signaling

| | |
|------------------------|----|
| Status display | no |
| Status display present | no |

Connection data

| | |
|----------------------|------------------------|
| Conductor connection | |
| Tightening torque | 0.4 Nm (M12 connector) |

Connector

Connection 1

SAC-4P-M12MS/ 1,5-PUR/M12FS SH -

Sensor/actuator cable



1500868

<https://www.phoenixcontact.com/us/products/1500868>

| | |
|---------------------|-------------------|
| Type | Plug straight M12 |
| Number of positions | 4 |
| Coding type | A |

Connection 2


| | |
|---------------------|---------------------|
| Type | Socket straight M12 |
| Number of positions | 4 |
| Coding type | A |

Cable/line

| | |
|--------------|-------|
| Cable length | 1.5 m |
|--------------|-------|

PUR halogen-free black [PUR]

Dimensional drawing



| | |
|---------------------------------|---------------------------------------|
| Cable weight | 36 kg/km |
| UL AWM Style | 20549 / 10493 (80°C/300 V) |
| Number of positions | 4 |
| Shielded | yes |
| Cable type | PUR halogen-free black [PUR] |
| Conductor structure signal line | 42x 0.10 mm |
| AWG signal line | 22 |
| Conductor cross section | 4x 0.34 mm ² (Signal line) |
| Wire diameter incl. insulation | 1.27 mm ±0.02 mm (Signal line) |
| External cable diameter | 4.95 mm ±0.2 mm |
| Outer sheath, material | PUR |
| External sheath, color | black-gray RAL 7021 |
| Conductor material | Bare Cu litz wires |
| Material wire insulation | PP |
| Single wire, color | brown, white, blue, black |
| Thickness, insulation | ≥ 0.21 mm |
| Thickness, outer sheath | approx. 0.50 mm |
| Overall twist | 4 wires, twisted |
| Optical shield covering | 80 % |
| Max. conductor resistance | max. 58 Ω/km (at 20 °C) |
| Insulation resistance | ≥ 100 GΩ*km (at 20 °C) |
| Wave impedance | ≥ 62 Ω (f = 10 MHz) |
| Cable capacity | ≤ 80 pF/m (Conductor-Conductor) |
| | ≤ 135 pF/m (Wire/shield) |

SAC-4P-M12MS/ 1,5-PUR/M12FS SH -

Sensor/actuator cable



1500868

<https://www.phoenixcontact.com/us/products/1500868>

| | |
|---|--|
| Nominal voltage, cable | ≤ 300 V |
| Test voltage | ≥ 3000 V |
| Minimum bending radius, fixed installation | 5 x D |
| Minimum bending radius, flexible installation | 10 x D |
| Smallest bending radius, fixed installation | 25 mm |
| Smallest bending radius, movable installation | 50 mm |
| Dynamic load capacity (bending) | Max. bending cycles: 10000000, Bending radius: 10 x D, Traversing path: 10 m, Traversing rate: 3 m/s, Acceleration: 10 m/s ² |
| Dynamic load capacity (torsion) | Torsion: ±180 °/m, Torsion cycles: ≥2000000, Torsional frequency: 35 cycles/min. |
| Halogen-free | in accordance with DIN VDE 0472 part 815 |
| Flame resistance | in accordance with DIN EN 50267-2-1 |
| Resistance to oil | in accordance with UL 758/1581 FT2 |
| Other resistance | DIN EN 60332-2-2 (20 s) |
| Special properties | in accordance with DIN EN 60811-2-1 Highly resistant to acids, alkaline solutions and solvents hydrolysis and microbe resistant Resistant to salt water partly UV-resistant (in accordance with DIN EN ISO 4892-2-A) abrasion-resistant Flexible cable conduit capable Silicone-free Free of substances which would hinder coating with paint or varnish Low adhesion surface |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) -25 °C ... 80 °C (Cable, flexible installation) |

Environmental and real-life conditions

| | |
|---|--|
| Ambient conditions | |
| Degree of protection | IP65 |
| | IP67 |
| Ambient temperature (operation) (male connector/female connector) | -25 °C ... 90 °C (Plug / socket) |
| Ambient temperature (operation) (Cable, fixed installation) | -25 °C ... 80 °C (cable, fixed installation) |
| Ambient temperature (operation) (Cable, flexible installation) | -5 °C ... 80 °C (Cable, flexible installation) |

Standards and regulations

| | |
|--------------------------|-----------------|
| Standard designation | M12 connector |
| Standards/specifications | IEC 61076-2-101 |

SAC-4P-M12MS/ 1,5-PUR/M12FS SH - Sensor/actuator cable




1500868

<https://www.phoenixcontact.com/us/products/1500868>


Drawings

Dimensional drawing

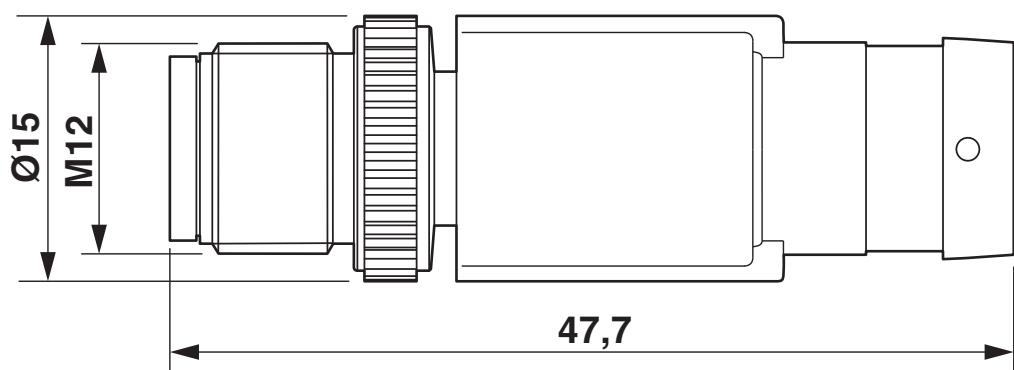

Plug, M12 x 1, straight, shielded

Dimensional drawing

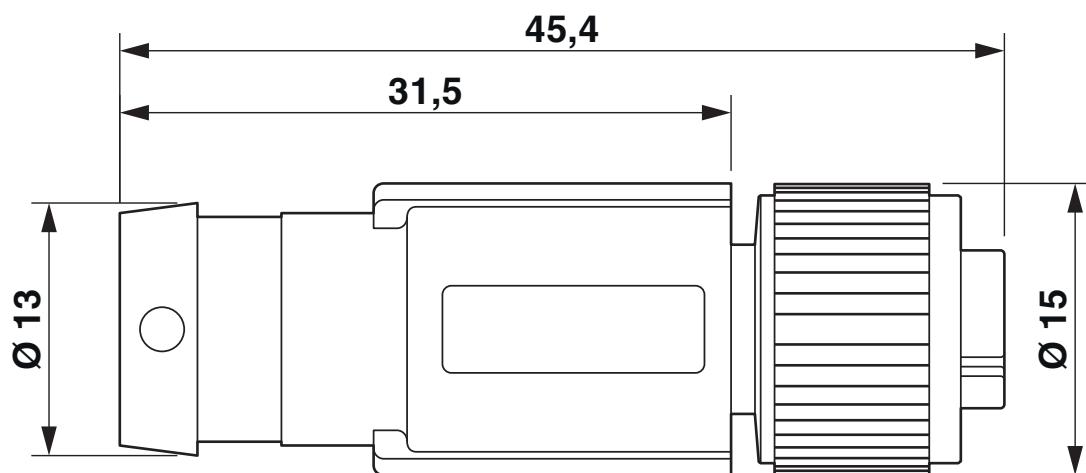

M12 x 1 socket, straight, shielded


SAC-4P-M12MS/ 1,5-PUR/M12FS SH -
Sensor/actuator cable



1500868

<https://www.phoenixcontact.com/us/products/1500868>

Schematic diagram

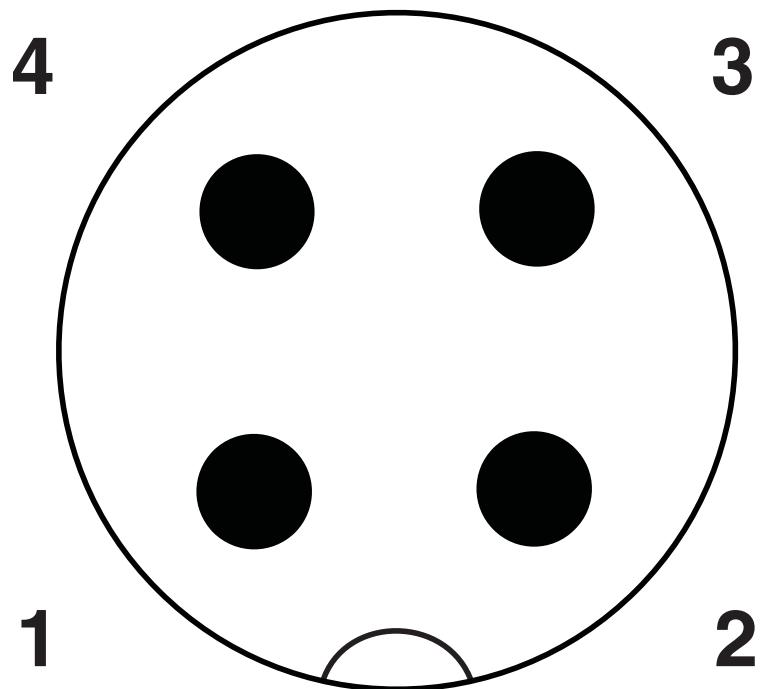

Pin assignment M12 plug, 4-pos., A-coded, view plug side


SAC-4P-M12MS/ 1,5-PUR/M12FS SH - Sensor/actuator cable



1500868


<https://www.phoenixcontact.com/us/products/1500868>

Schematic diagram

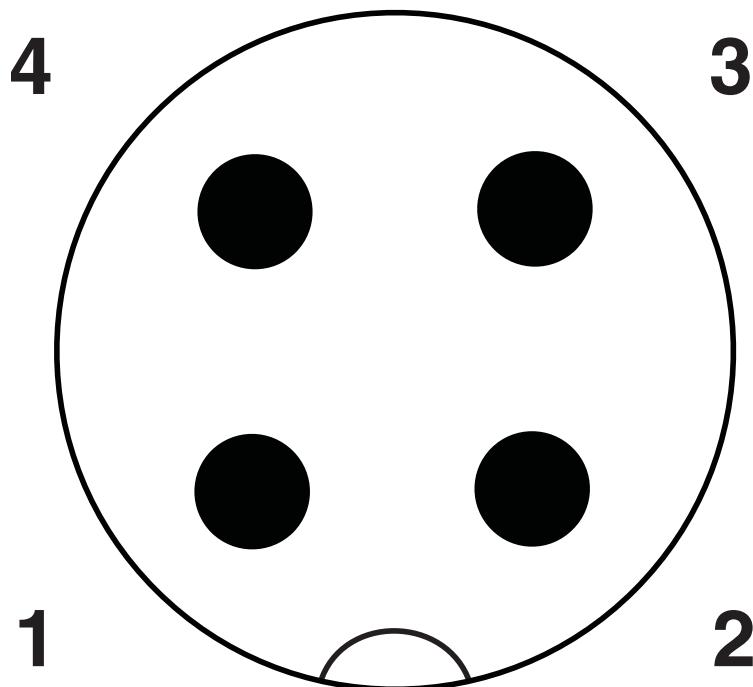

Pin assignment M12 socket, 4-pos., A-coded, view female side

Circuit diagram

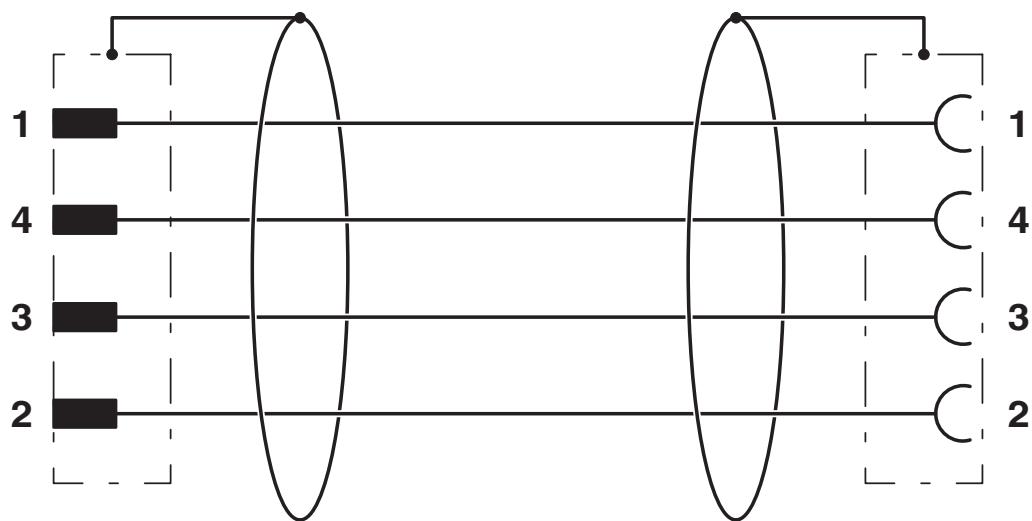

Contact assignment of the M12 plug and the M12 socket

SAC-4P-M12MS/ 1,5-PUR/M12FS SH - Sensor/actuator cable



1500868

<https://www.phoenixcontact.com/us/products/1500868>

Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1500868>

| UL Listed | | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|-----------|--|-----------------------|-----------------------|-------------------|----------------------|
| keine | | 300 V | 4 A | - | - |

| cUL Listed | | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|------------|--|-----------------------|-----------------------|-------------------|----------------------|
| keine | | 300 V | 4 A | - | - |

| EAC-RoHS | | | | | |
|----------|-----------------------------------|--|--|--|--|
| ER | Approval ID: RU D-DE.HB35.B.00387 | | | | |

SAC-4P-M12MS/ 1,5-PUR/M12FS SH - Sensor/actuator cable



1500868

<https://www.phoenixcontact.com/us/products/1500868>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27060311 |
| ECLASS-15.0 | 27060311 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001855 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

SAC-4P-M12MS/ 1,5-PUR/M12FS SH - Sensor/actuator cable



1500868

<https://www.phoenixcontact.com/us/products/1500868>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com