

RF-17S2N8AAK00 - Device connector front mounting



1607899

<https://www.phoenixcontact.com/us/products/1607899>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, angled fixed, Screw locking mechanism, M23, number of positions: 17, contact connection type: Socket, Axial O-ring, 4x Ø 3.2, shielded: yes, flange dimensions: 28 mm x 28 mm, number of positions: 17, connection method: Crimp connection, series: RF

Commercial data

Item number	1607899
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	AB31
Product key	ABRAGM
GTIN	4046356269414
Weight per piece (including packing)	58.96 g
Weight per piece (excluding packing)	58.96 g
Customs tariff number	85366990
Country of origin	DE

RF-17S2N8AAK00 - Device connector front mounting

1607899

<https://www.phoenixcontact.com/us/products/1607899>



Technical data

Notes

Order information:	Order crimp contacts Ø 1 mm separately
--------------------	--

Product properties

Product type	Circular connectors (device side)
Series	RF
Application	Feedback, signal
	Signal
Number of positions	17
Connection profile	17
Shielded	yes
Coding	N
Thread type	M23

Dimensions

Housing	
Flange dimensions	28 mm x 28 mm

Material specifications

Seal material	FPM
Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Insulator material	PA 6.6
Gasket and O-ring material	FPM

Electrical properties

Contact	
Contact diameter	1 mm
Nominal current I_N	8 A
Nominal voltage U_N	100 V
Oversupply category	III
Degree of pollution	3
Rated surge voltage	1.5 kV

Connection data

Conductor connection	
Connection method	Crimp connection
Contact connection type	Socket

Connector

Type	angled fixed
------	--------------

RF-17S2N8AAK00 - Device connector front mounting

1607899

<https://www.phoenixcontact.com/us/products/1607899>



Direction of rotation

Counter direction

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-20 °C ... 125 °C
Altitude	2000 m

RF-17S2N8AAK00 - Device connector front mounting




1607899


<https://www.phoenixcontact.com/us/products/1607899>

Drawings

Dimensional drawing

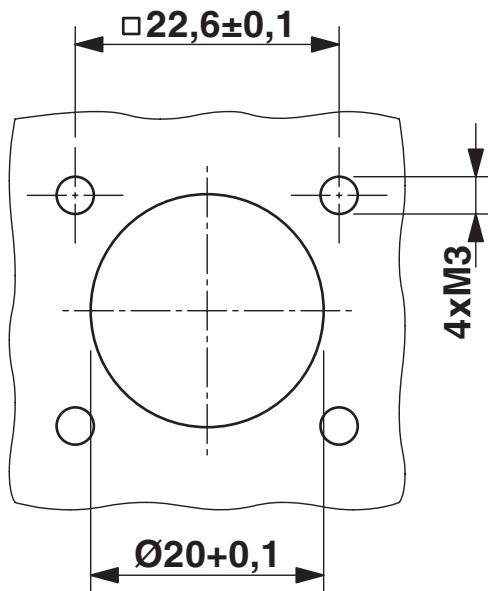

Dimensional drawing

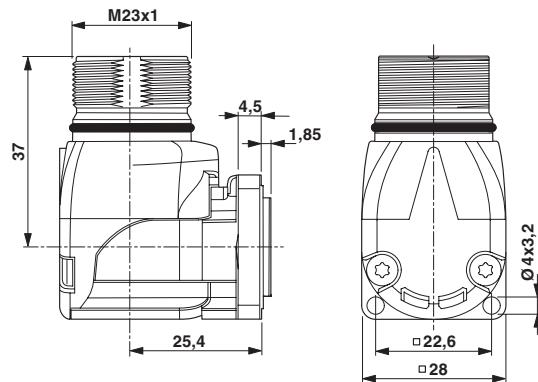


RF-17S2N8AAK00 - Device connector front mounting

1607899

<https://www.phoenixcontact.com/us/products/1607899>



Schematic diagram

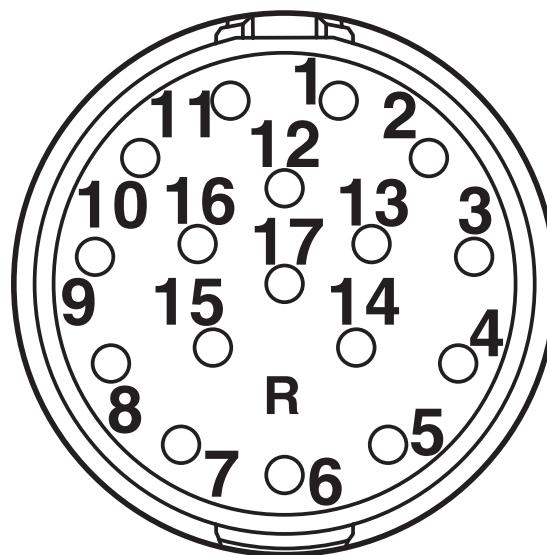

Environmental product compliance

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com