

# ELR W3- 24DC/500AC- 2 - Solid-state reversing contactor



2297293

<https://www.phoenixcontact.com/us/products/2297293>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Three-phase solid-state reversing contactor with 24 V DC input, 2 A output current, zero voltage switch, optionally with thermal fuse

## Your advantages

- Optional thermal fuse
- Stable and short switching times
- Noise and wear-free switching
- Long service life
- Integrated protection circuit
- Integrated locking and load wiring
- High switching frequency

## Commercial data

Item number	2297293
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	C472
Product key	DK6841
GTIN	4046356175654
Weight per piece (including packing)	425.89 g
Weight per piece (excluding packing)	419.8 g
Customs tariff number	85364900
Country of origin	DE

# ELR W3- 24DC/500AC- 2 - Solid-state reversing contactor



2297293

<https://www.phoenixcontact.com/us/products/2297293>

## Technical data

### Product properties

Product type	Solid-state contactor
Operating mode	100% operating factor

### Electrical properties

Number of phases	3
Switching frequency	max. 5 Hz
Test voltage (Input/output)	5 kV <sub>rms</sub> (50 Hz, 60 s)
Switching frequency	max. 5 Hz
Reversing frequency	≤ 10 Hz

### Insulation characteristics

Rated insulation voltage	500 V
Rated surge voltage	6 kV
Overtoltage category	III
Degree of pollution	2
Insulation characteristics between the control input voltage to the main circuit	Basic insulation

### Input data

#### Control

Input name	Control input right/left
Rated actuating voltage U <sub>C</sub>	24 V DC
Triggering voltage range	19.2 V DC ... 30 V DC
Voltage range with reference to U <sub>C</sub>	0.8 ... 1.25
	0.8 ... 1.25
Rated actuating current I <sub>C</sub>	12.7 mA
Switching threshold	9.6 V ("0" signal) 19.2 V ("1" signal)
Protective circuit	Reverse polarity protection; Suppressor diode
	Surge protection
Error indication	Red LED
Status display	LED (yellow)

### Output data

#### AC output

Rated operating voltage U <sub>e</sub>	500 V AC
Operating voltage range	48 V AC ... 575 V AC
Rated operating current at AC-51	2 A
Rated operating current at AC-53a	2 A
Peak offstate voltage	1200 V

# ELR W3- 24DC/500AC- 2 - Solid-state reversing contactor



2297293

<https://www.phoenixcontact.com/us/products/2297293>

Mains frequency	40 Hz ... 100 Hz
Load current range	100 mA ... 2 A (see to derating)
Leakage current	6 mA
Residual voltage	< 1.5 V
Surge current	200 A (t = 10 ms)
Max. load value	250 A <sup>2</sup> s
Protective circuit	RCV circuit
Surge voltage protection	> 575 V AC

## Connection data

### Control circuits

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross-section rigid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section AWG	24 ... 14
Tightening torque	0.5 Nm ... 0.6 Nm
	5 lb <sub>f</sub> ·in. ... 7 lb <sub>f</sub> ·in.

### Load circuit

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross-section rigid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section AWG	24 ... 14
Tightening torque	0.5 Nm ... 0.6 Nm
	5 lb <sub>f</sub> ·in. ... 7 lb <sub>f</sub> ·in.

## Signaling

Status display	LED (yellow)
Error indication	Red LED

## Dimensions

Width	40 mm
Height	99 mm
Depth	114.5 mm

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 70 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C

# ELR W3- 24DC/500AC- 2 - Solid-state reversing contactor



2297293

<https://www.phoenixcontact.com/us/products/2297293>

## Approvals

### UKCA

Certificate	UKCA-compliant
-------------	----------------

### UL approval

Certificate	NMFT.E323771
-------------	--------------

### UL data

SCCR	5 kA (20 A RK5 (standard fault) fuse)
------	---------------------------------------

## Standards and regulations

### Standards/regulations

Standards/regulations	DIN EN 50178
	EN 60947

## Mounting

Mounting type	DIN rail mounting
Assembly note	can be aligned with spacing = 20 mm
Mounting position	Vertical (horizontal DIN rail)



# ELR W3- 24DC/500AC- 2 - Solid-state reversing contactor



2297293

<https://www.phoenixcontact.com/us/products/2297293>

## Drawings

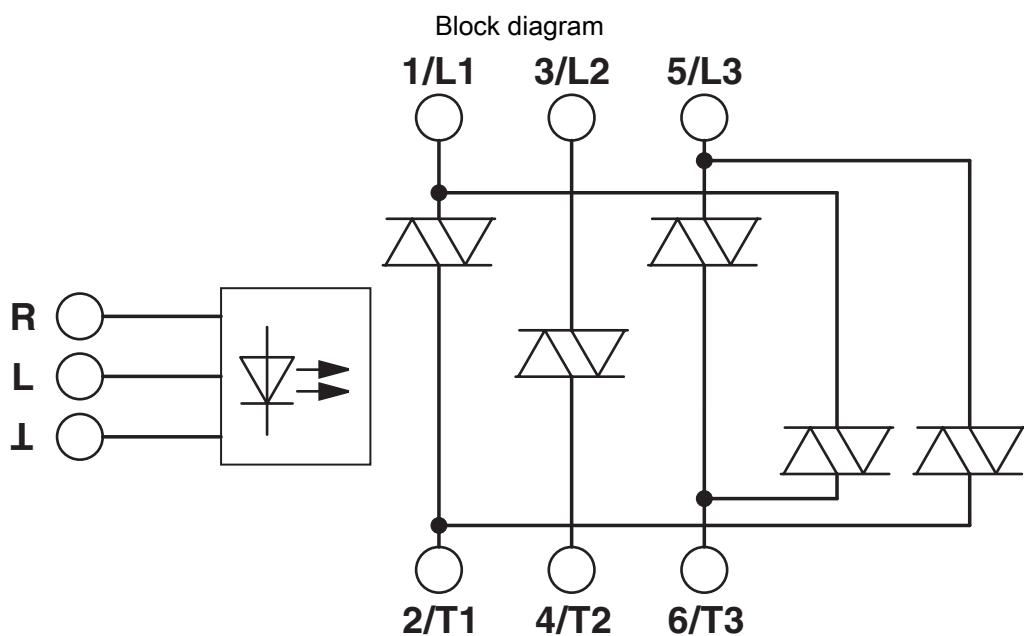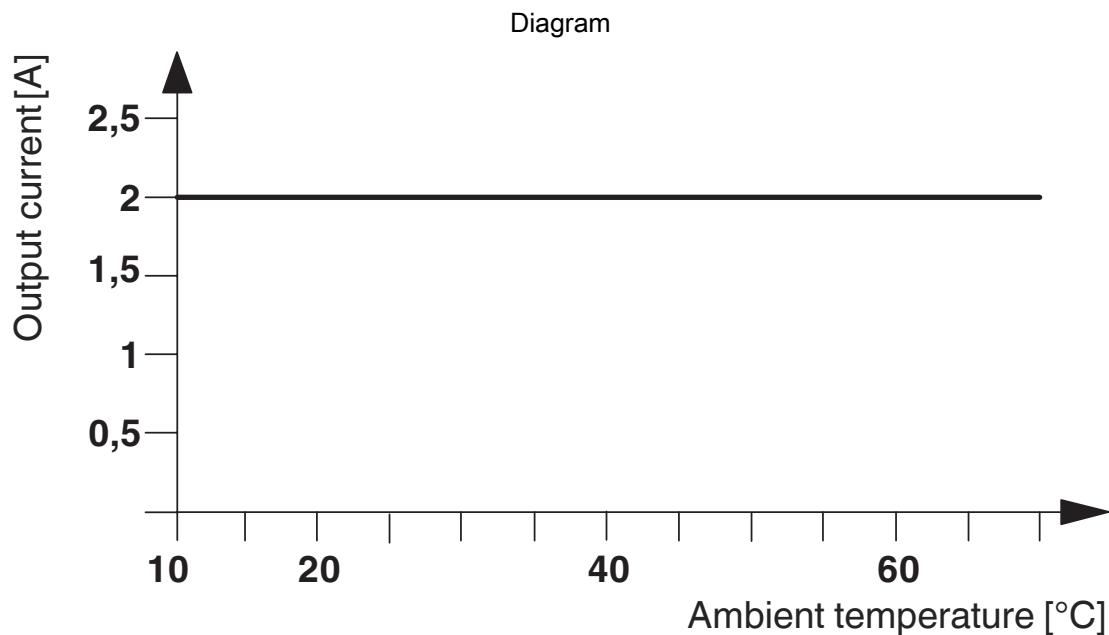

# ELR W3- 24DC/500AC- 2 - Solid-state reversing contactor



2297293

<https://www.phoenixcontact.com/us/products/2297293>

## Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2297293>



**EAC**

Approval ID: RU\*C-DE.\*08.B.00520\*



**UL Listed**

Approval ID: FILE E 323771



**cUL Listed**

Approval ID: FILE E 323771

# ELR W3- 24DC/500AC- 2 - Solid-state reversing contactor



2297293

<https://www.phoenixcontact.com/us/products/2297293>

## Classifications

### ECLASS

ECLASS-13.0	27371003
ECLASS-15.0	27371003

### ETIM

ETIM 9.0	EC000066
----------	----------

### UNSPSC

UNSPSC 21.0	39122300
-------------	----------

# ELR W3- 24DC/500AC- 2 - Solid-state reversing contactor



2297293

<https://www.phoenixcontact.com/us/products/2297293>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	e4962307-e1be-4652-9465-02ec85beb2b6

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

### Phoenix Contact USA

586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)