

# PSI-MOS-RS422/FO 850 E - FO converters



2708355

<https://www.phoenixcontact.com/us/products/2708355>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



FO converter with integrated optical diagnostics, alarm contact, for RS-422/RS-485 4-wire/INTERBUS up to 2 Mbps, terminal device with one FO interface (BFOC), 850 nm, for PCF/fiberglass cable (multimode)

## Your advantages

- Supply voltage routed through via DIN rail connectors
- Connections can be plugged in via a COMBICON screw terminal block
- Redundant power supply possible by means of optional system power supply unit
- High-quality electrical isolation between all interfaces (INTERBUS // FO ports // supply // DIN rail connector)
- Approved for use in zone 2
- Floating switch contact for advance warning of critical FO paths
- Integrated optical diagnostics for continuous monitoring of FO paths
- Intrinsically safe fiber optic interface (Ex op is) for direct connection to devices in zone 1
- Automatic data rate detection for all data rates up to 2 Mbps
- Shipbuilding approval in accordance with DNV GL

## Commercial data

Item number	2708355
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN06
Product key	DNC216
GTIN	4017918974053
Weight per piece (including packing)	253.7 g
Weight per piece (excluding packing)	190.238 g
Customs tariff number	85176200
Country of origin	DE

# PSI-MOS-RS422/FO 850 E - FO converters

2708355

<https://www.phoenixcontact.com/us/products/2708355>



## Technical data

### Notes

#### Note on application

Note on application	Only for industrial use
Utilization restriction	

#### CCCxex note

Use in potentially explosive areas is not permitted in China.

## Product properties

Product type	Media converter
Product family	PSI-MOS
MTTF	1024 Years (SN 29500 standard, temperature 25°C, operating cycle 21%) 442 Years (SN 29500 standard, temperature 40°C, operating cycle 34.25%) 183 Years (SN 29500 standard, temperature 40°C, operating cycle 100%)
MTBF	320 Years (Telcordia standard, 25°C temperature, 21% operating cycle (5 days a week, 8 hours a day)) 48 Years (Telcordia standard, 40°C temperature, 34.25% operating cycle (5 days a week, 12 hours a day))

## Electrical properties

Electrical isolation	VCC // RS-422
Maximum power dissipation for nominal condition	2.88 W
Test voltage data interface/power supply	1.5 kV <sub>rms</sub> (50 Hz, 1 min.)

### Supply

Supply voltage range	18 V DC ... 30 V DC
Nominal supply voltage	24 V DC (in acc. with UL)
Typical current consumption	120 mA (24 V DC)
Max. current consumption	130 mA ≤ 2 A (For operation in a joining station, via the DIN rail connector)

## Output data

### Switching

Output name	Relay output
Output description	Alarm output
Number of outputs	1
Maximum switching voltage	60 V DC
	42 V AC
Limiting continuous current	0.46 A

# PSI-MOS-RS422/FO 850 E - FO converters



2708355

<https://www.phoenixcontact.com/us/products/2708355>

## Connection data

### Supply

Connection method	COMBICON plug-in screw terminal block
Tightening torque	0.56 Nm ... 0.79 Nm

### Interfaces

Bit distortion, input	± 35 % (permitted)
Bit distortion, output	< 6.25 %
Signal	INTERBUS
Transmission channels	2 (1/1) RD, TD, full duplex

### Data: optical FO

No. of channels	1
Transmit capacity, minimum	-4.6 dBm (200/230 µm)
	-17.6 dBm (50/125 µm)
	-13.6 dBm (62,5/125 µm)
Transmission length incl. 3 dB system reserve	2800 m (F-K 200/230 8 dB/km with quick mounting connector) 4200 m (with F-G 50/125 2.5 dB/km) 4800 m (with F-G 62,5/125 3.0 dB/km)
Transmission protocol	Transparent to protocol for RS-422 interface
Connection method	B-FOC (ST®)
Wavelength	850 nm
Minimum receiver sensitivity	-33.2 dBm
Transmission medium	PCF fiber Multi-mode fiberglass

### Data: RS-422 interface in acc. with ITU-T V.11, EIA/TIA-422, DIN 66348-1

Serial transmission speed	≤ 2 Mbps
Connection method	Pluggable screw connection
Transmission length	≤ 1000 m (depending on the data rate, with shielded, twisted data cable)
Termination resistor	220 Ω 100 Ω 220 Ω
Single conductor/terminal point, rigid	0.2 mm² ... 2.5 mm²
Single-wire/terminal point, flexible	0.2 mm² ... 2.5 mm²
Max. AWG conductor cross-section, flexible	14
Min. AWG conductor cross-section, flexible	24
Single-wire/terminal point, rigid AWG max.	14
Single-wire/terminal point, rigid AWG min.	24
Transmission medium	Copper
File format/coding	UART (11 Bit, NRZ)

## Dimensions

# PSI-MOS-RS422/FO 850 E - FO converters

2708355

<https://www.phoenixcontact.com/us/products/2708355>



Width	35 mm
Height	99 mm
Depth	103 mm

## Material specifications

Color (Housing)	green (RAL 6021)
Material (Housing)	PA 6.6-FR

## Cable/line

### FO cable

Fiber types	200/230 µm
	50/125 µm
	62.5/125 µm
	PCF fiber
	Fiberglass

## Mechanical tests

Vibration resistance in accordance with EN 60068-2-6/IEC 60068-2-6	Vibration (operation): 5g, 10...150 Hz, 2.5 h, in XYZ direction
Shock in accordance with EN 60068-2-27/IEC 60068-2-27	Shock (operation): 15g, 11 ms period, half-sine shock pulse

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	≤ 5000 m (For restrictions, see the manufacturer's declaration for altitude operation)
Permissible humidity (operation)	30 % ... 95 % (non-condensing)

## Approvals

### CE

Certificate	CE-compliant
-------------	--------------

### ATEX

Identification	Ex II 3 G Ex nA nC IIC T4 Gc X
Note	Please follow the special installation instructions in the documentation!

### ATEX, FO interface

Identification	Ex II (2) G [Ex op is Gb] IIC
	Ex II (2) D [Ex op is Db] IIIC
Certificate	PTB 06 ATEX 2042 U
Note	Please follow the special installation instructions in the documentation!

# PSI-MOS-RS422/FO 850 E - FO converters

2708355

<https://www.phoenixcontact.com/us/products/2708355>



UL, USA/Canada

Identification	Class I, Zone 2, AEx nc IIC T5
	Class I, Zone 2, Ex nC nL IIC T5 X
	Class I, Div. 2, Groups A, B, C, D

Corrosive gas test

Identification	ISA-S71.04-1985 G3 Harsh Group A
----------------	----------------------------------

Shipbuilding

Identification	DNV GL
----------------	--------

Shipbuilding data

Temperature	B
Humidity	A
Vibration	A
EMC	B
Enclosure	Required protection according to the Rules shall be provided upon installation on board

EMC data

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Noise immunity	EN 61000-6-2:2005

Noise emission

Standards/regulations	EN 55011
-----------------------	----------

Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

Electrostatic discharge

Contact discharge	± 6 kV
Discharge in air	± 8 kV
Comments	Criterion B

Electromagnetic HF field

Standards/regulations	EN 61000-4-3
-----------------------	--------------

Electromagnetic HF field

Field intensity	10 V/m
Comments	Criterion A

Fast transients (burst)

Standards/regulations	EN 61000-4-4
-----------------------	--------------

Fast transients (burst)

Input	± 2 kV
Signal	± 2 kV
Comments	Criterion B

# PSI-MOS-RS422/FO 850 E - FO converters

2708355

<https://www.phoenixcontact.com/us/products/2708355>



## Surge current load (surge)

Standards/regulations	EN 61000-4-5
-----------------------	--------------

## Surge current load (surge)

Input	± 0.5 kV
Signal	± 1 kV
Comments	Criterion B

## Conducted interference

Standards/regulations	EN 61000-4-6
-----------------------	--------------

## Conducted interference

Comments	Criterion A
Voltage	10 V

## Emitted interference

Standards/regulations	EN 55011
Comments	Class A, industrial applications

## Criteria

Criterion A	Normal operating behavior within the specified limits.
Criterion B	Temporary impairment to operational behavior that is corrected by the device itself.

## Mounting

Mounting type	DIN rail mounting
---------------	-------------------

# PSI-MOS-RS422/FO 850 E - FO converters




2708355

<https://www.phoenixcontact.com/us/products/2708355>

## Drawings

Application drawing

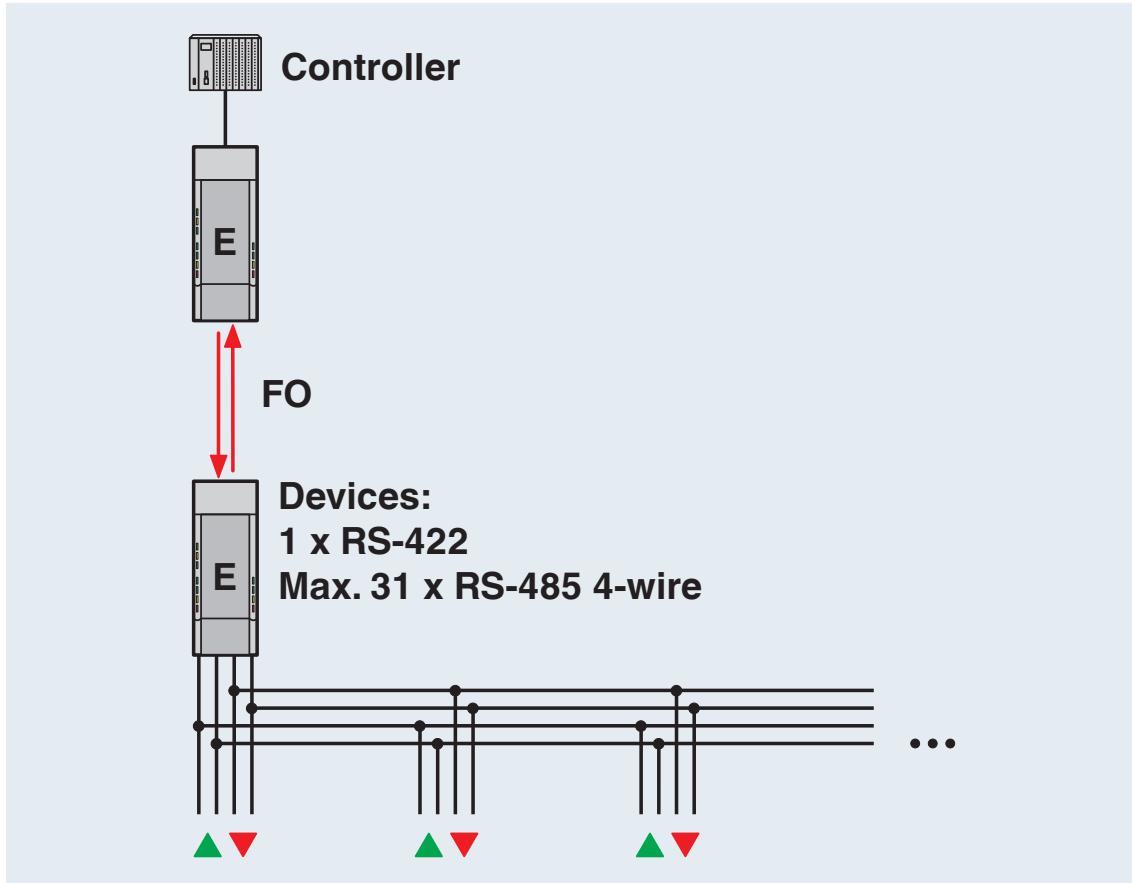

Point-to-point connection


# PSI-MOS-RS422/FO 850 E - FO converters



2708355

<https://www.phoenixcontact.com/us/products/2708355>

Application drawing

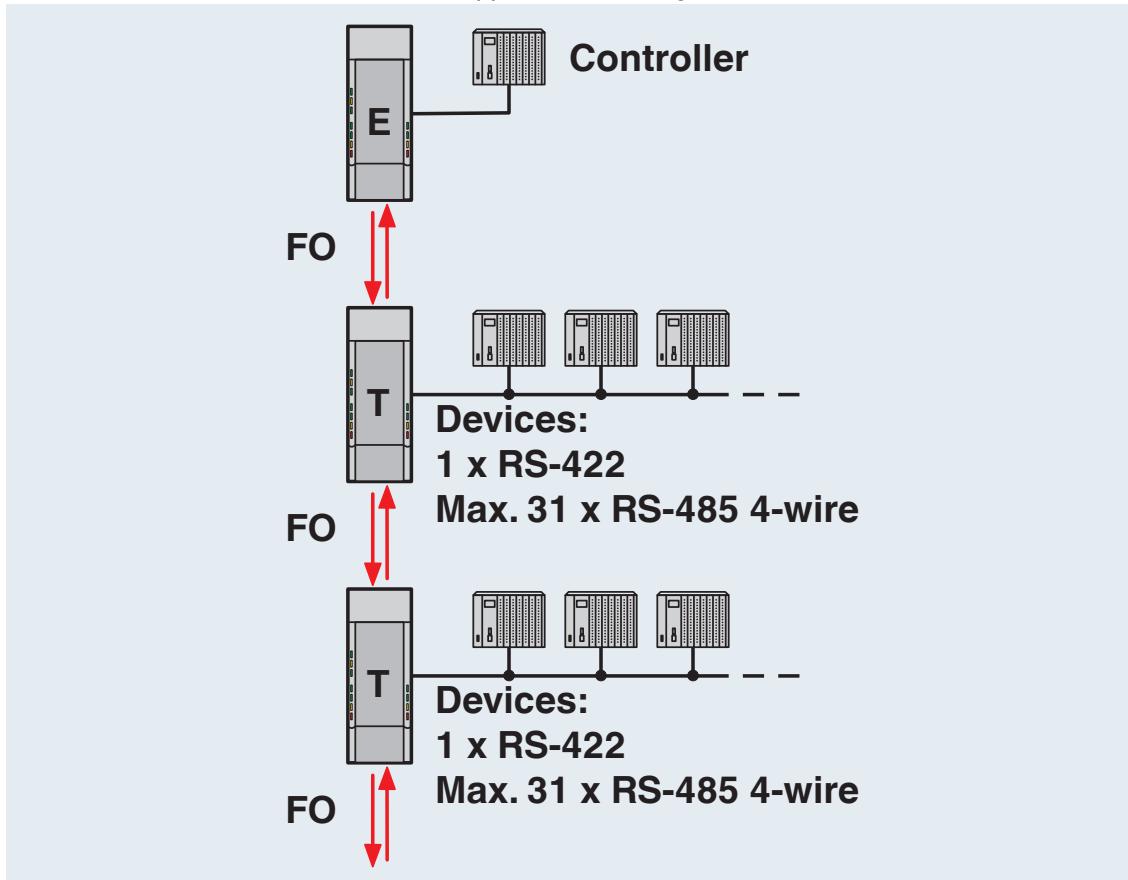

Controller-device line structure


# PSI-MOS-RS422/FO 850 E - FO converters



2708355

<https://www.phoenixcontact.com/us/products/2708355>

Application drawing

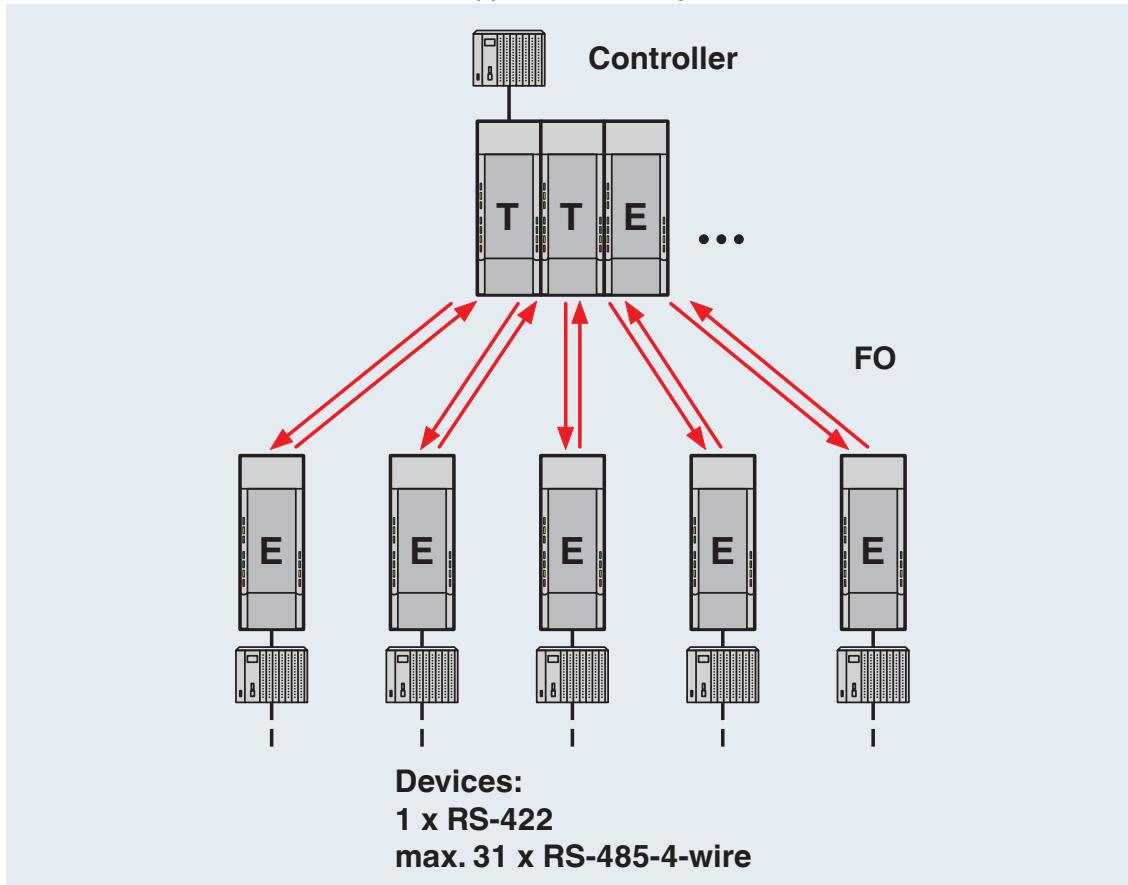

Star structure


# PSI-MOS-RS422/FO 850 E - FO converters



2708355

<https://www.phoenixcontact.com/us/products/2708355>

Application drawing

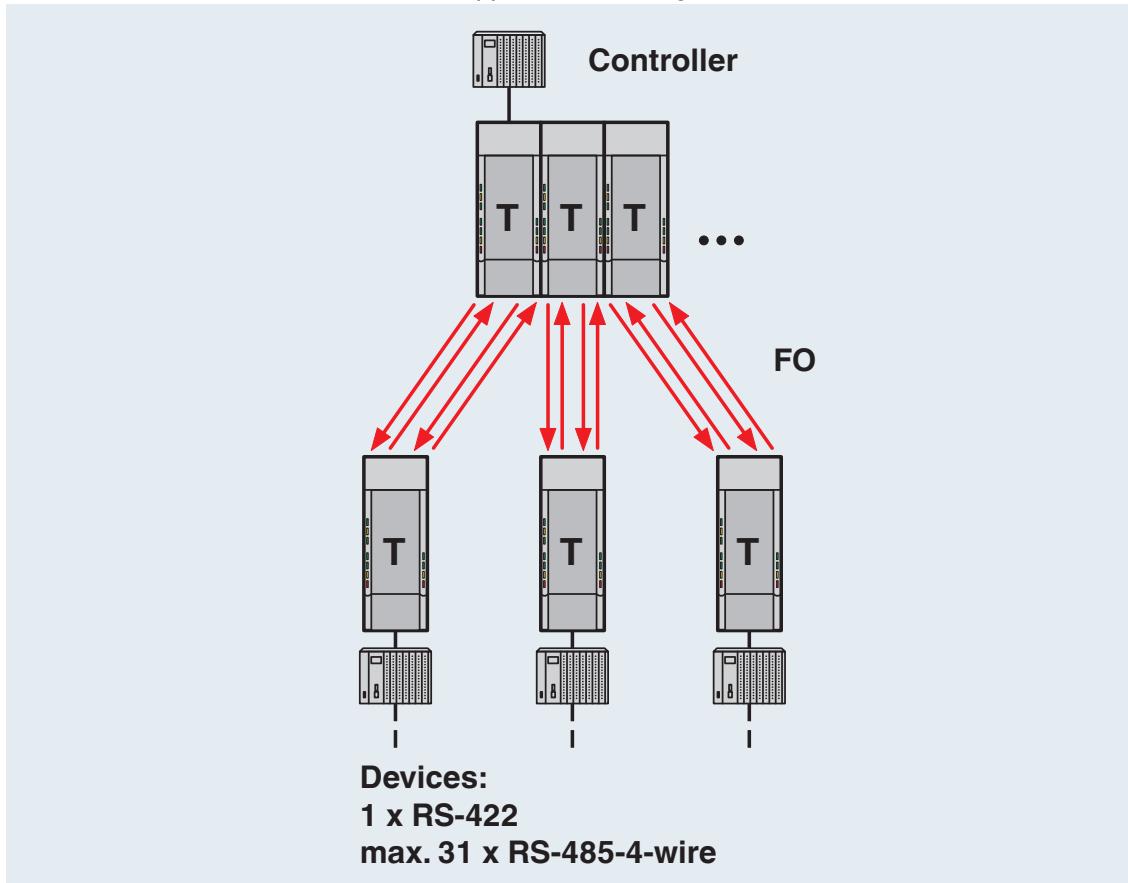


Redundant structure

# PSI-MOS-RS422/FO 850 E - FO converters




2708355

<https://www.phoenixcontact.com/us/products/2708355>

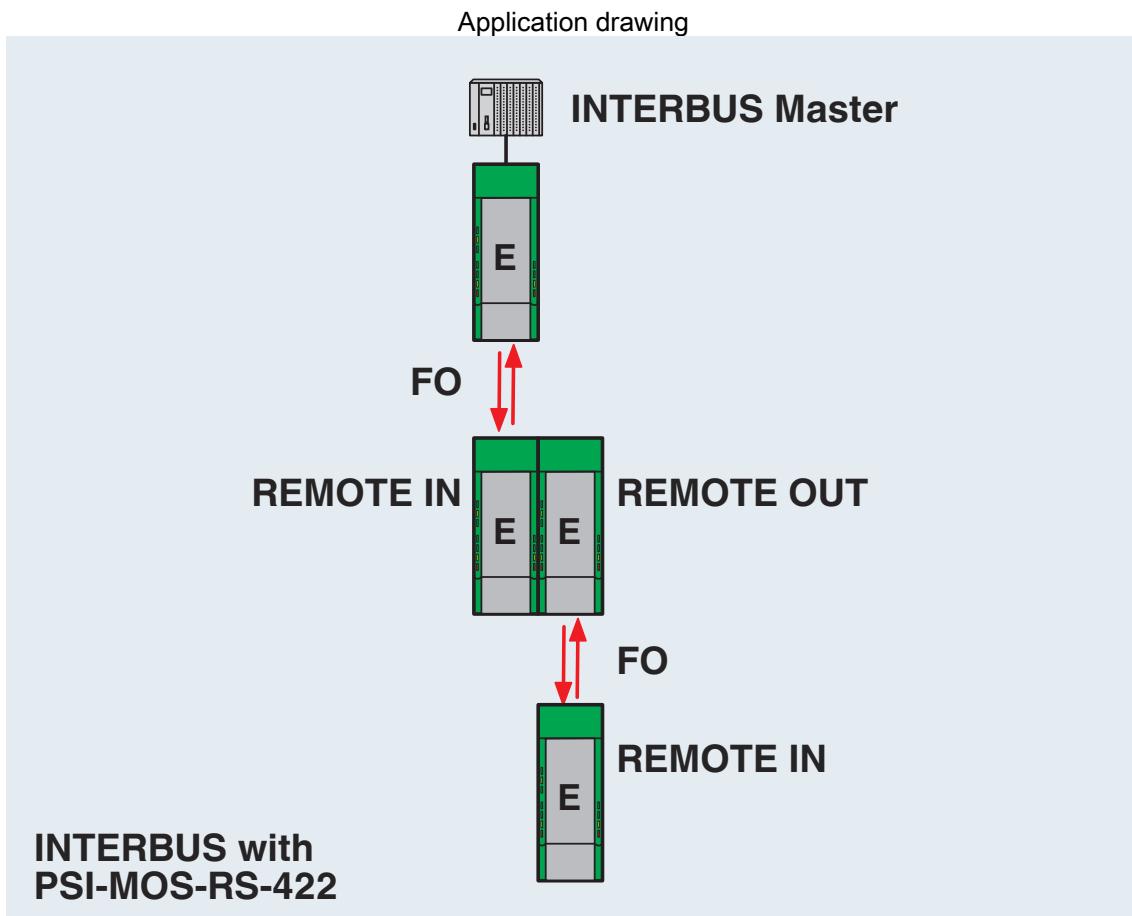


Functional drawing

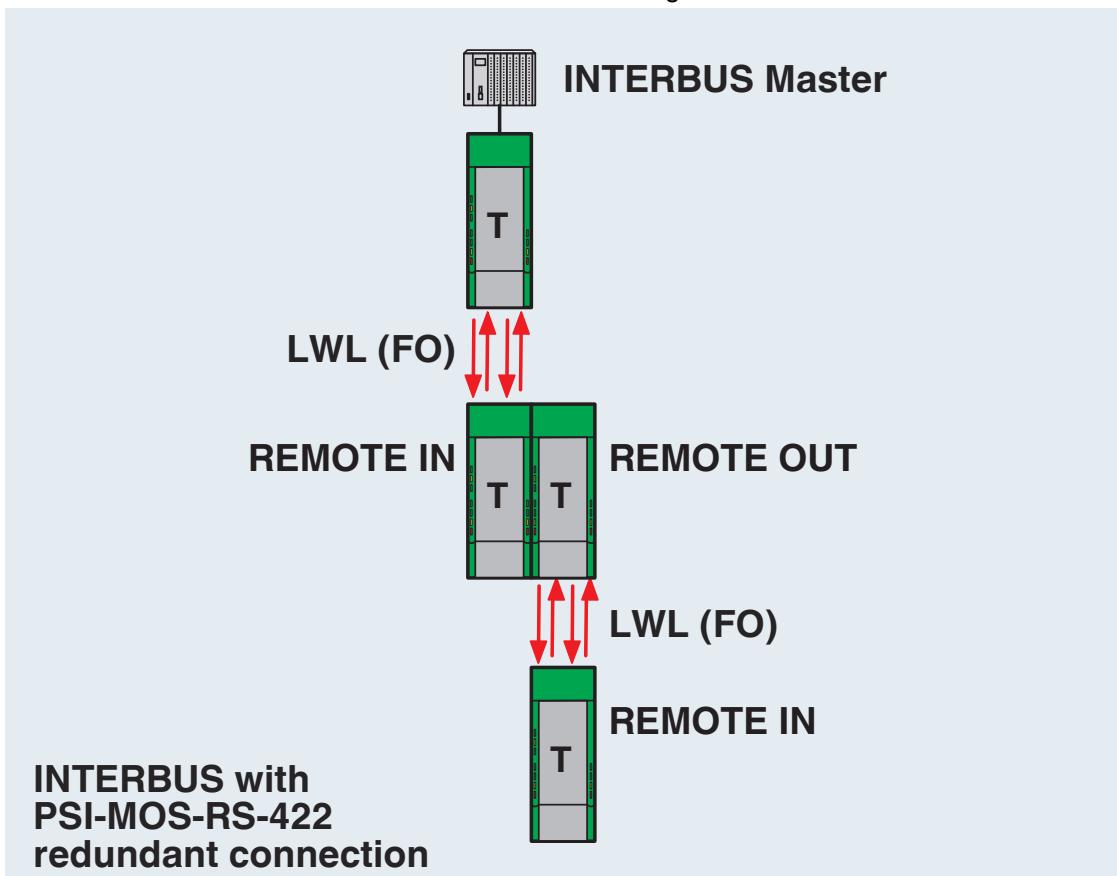

INTERBUS with PSI-MOS-RS-422  
Redundant connection

Schematic diagram

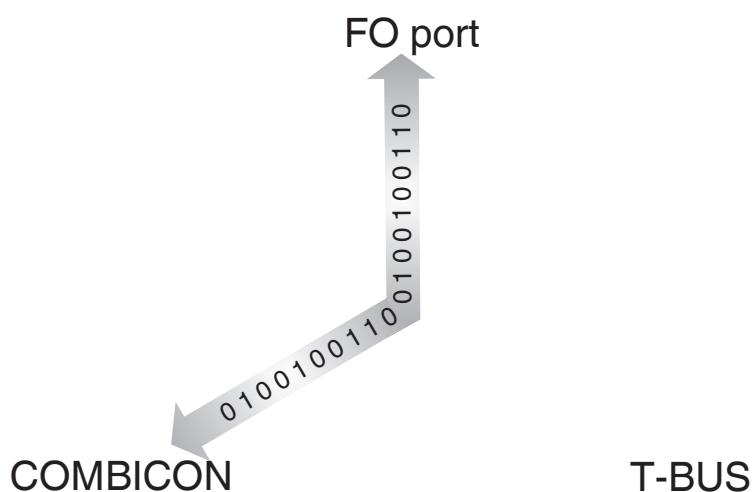

Port assignment for point-to-point connections


# PSI-MOS-RS422/FO 850 E - FO converters

2708355

<https://www.phoenixcontact.com/us/products/2708355>




Schematic diagram

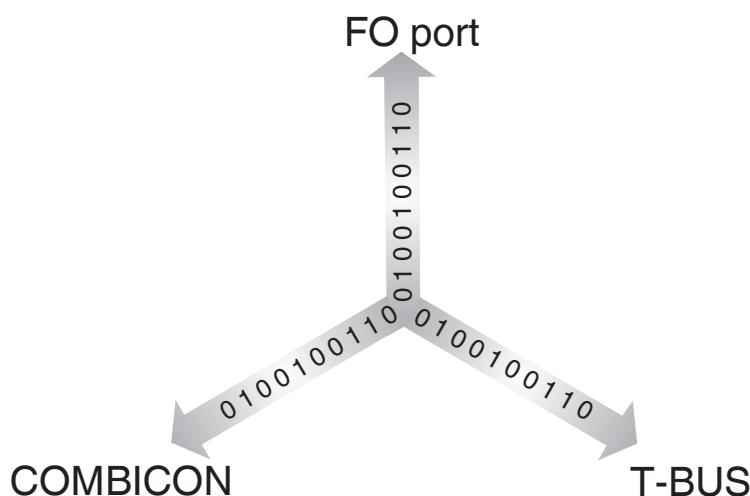

Port assignment in star structures

Block diagram

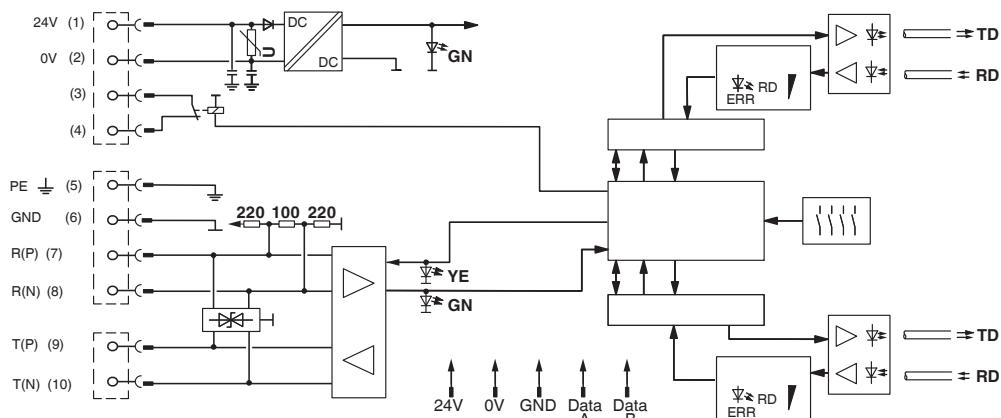

\*) only with PSI-MOS.../FO...T

# PSI-MOS-RS422/FO 850 E - FO converters

2708355

<https://www.phoenixcontact.com/us/products/2708355>



## Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2708355>



**DNV GL**

Approval ID: TAA00001KR



**cULus Recognized**

Approval ID: E238705



**ATEX**

Approval ID: PxClF06ATEX2708261X



**cUL Listed**

Approval ID: E199827



**UL Listed**

Approval ID: E199827

# PSI-MOS-RS422/FO 850 E - FO converters

2708355

<https://www.phoenixcontact.com/us/products/2708355>



## Classifications

### ECLASS

ECLASS-13.0	19170411
ECLASS-15.0	19170411

### ETIM

ETIM 9.0	EC001467
----------	----------

### UNSPSC

UNSPSC 21.0	43201500
-------------	----------

# PSI-MOS-RS422/FO 850 E - FO converters

2708355

<https://www.phoenixcontact.com/us/products/2708355>



## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	184b1afa-0050-4e61-9a2a-a54b91145157

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

### Phoenix Contact USA

586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)