

# IB IL 24 PWR IN-PAC - Feed-in module



2861331

<https://www.phoenixcontact.com/us/products/2861331>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Inline power terminal, complete with accessories (connector and labeling field), 24 V DC, without fuse



## Product description

The terminal is designed for use within an Inline station. It enables the 24 V supply voltage to be fed into the main circuit ( $U_M$ ). In addition, this terminal can be used to supply power for a 24 V segment circuit ( $U_S$ ).

## Your advantages

- Supply of the 24 V main voltage  $U_{M}$
- Feed-in or provision of the 24 V segment voltage  $U_S$
- Main circuit protected by an external fuse
- Segment circuit can be protected by an external fuse

## Commercial data

Item number	2861331
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DR01
Product key	DRI121
GTIN	4017918894276
Weight per piece (including packing)	82.8 g
Weight per piece (excluding packing)	59 g
Customs tariff number	85389099
Country of origin	DE

# IB IL 24 PWR IN-PAC - Feed-in module



2861331

<https://www.phoenixcontact.com/us/products/2861331>

## Technical data

### Dimensions

Dimensional drawing	
Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm

### Notes

#### Note on application

Note on application	Only for industrial use
---------------------	-------------------------

#### Utilization restriction

CCEx note	Use in potentially explosive areas is not permitted in China.
-----------	---

## Interfaces

### Inline local bus

Number of interfaces	2
Connection method	Inline data jumper
Transmission speed	500 kbps / 2 Mbps (Can be used in Inline stations with these transmission speeds)

## System properties

### Module

ID code (dec.)	none
ID code (hex)	none
Process data channel	0 bit
Input address area	0 bit
Output address area	0 bit
Register length	0 bit
Required parameter data	0 Byte
Required configuration data	0 Byte

## Product properties

Product type	I/O component
Product family	Inline
Type	modular

# IB IL 24 PWR IN-PAC - Feed-in module



2861331

<https://www.phoenixcontact.com/us/products/2861331>

Installation location	Control cabinet
Number of plugs	1
Special properties	24 V DC $U_M$ , $U_S$

Insulation characteristics	
Protection class	III (IEC 61140, EN 61140, VDE 0140-1)

## Electrical properties

Maximum power dissipation for nominal condition	1.8 W
Test section	7.5 V supply (bus logics)/24 V supply (I/O) 500 V AC 50 Hz 1 min 24 V supply (I/O) / functional ground 500 V AC 50 Hz 1 min 7.5 V supply (bus logic)/functional ground 500 V AC 50 Hz 1 min
Protective circuit	Surge protection; Suppressor diode Reverse polarity protection; Parallel polarity protection diode Overload protection, short-circuit protection in the segment circuit; No

Potentials: Main circuit supply ( $U_M$ )	
Supply voltage	24 V DC (via Inline connector)
Supply voltage range	19.2 V ... 30 V (including all tolerances, including ripple)

Potentials: Segment circuit supply ( $U_S$ )	
Supply voltage	24 V DC (via Inline connector)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)

## Connection data

Connection technology	
Connection name	Inline connector
Conductor connection	
Connection method	Spring-cage connection
Conductor cross-section rigid	0.08 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross-section flexible	0.08 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross-section AWG	28 ... 16
Stripping length	8 mm

Inline connector	
Connection method	Spring-cage connection
Conductor cross-section, rigid	0.08 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross-section, flexible	0.08 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross-section AWG	28 ... 16
Stripping length	8 mm

## Environmental and real-life conditions

Ambient conditions	
--------------------	--

# IB IL 24 PWR IN-PAC - Feed-in module



2861331

<https://www.phoenixcontact.com/us/products/2861331>

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 95 % (non-condensing)
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)

## Mounting

Mounting type	DIN rail mounting
---------------	-------------------

# IB IL 24 PWR IN-PAC - Feed-in module




2861331


<https://www.phoenixcontact.com/us/products/2861331>

## Drawings

Dimensional drawing

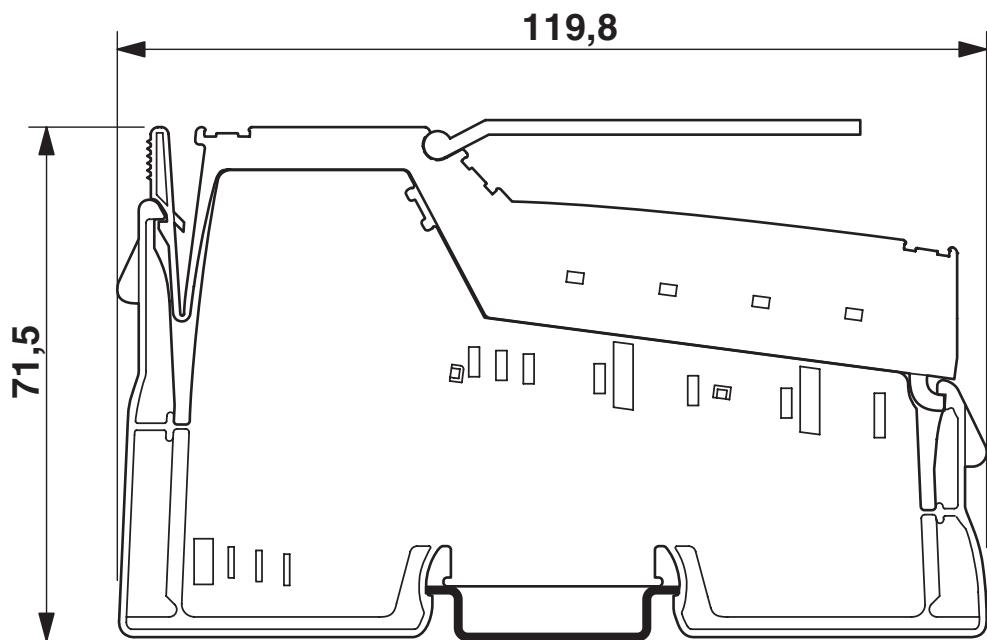

Connection diagram

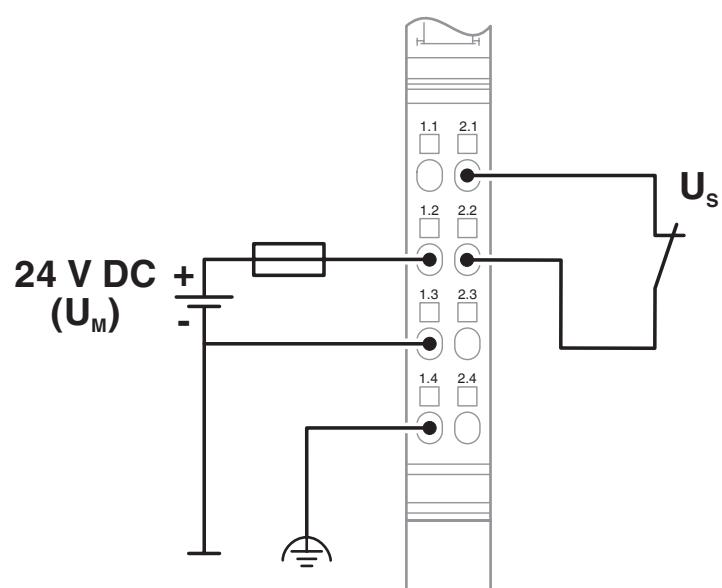


# IB IL 24 PWR IN-PAC - Feed-in module



2861331

<https://www.phoenixcontact.com/us/products/2861331>

Block diagram

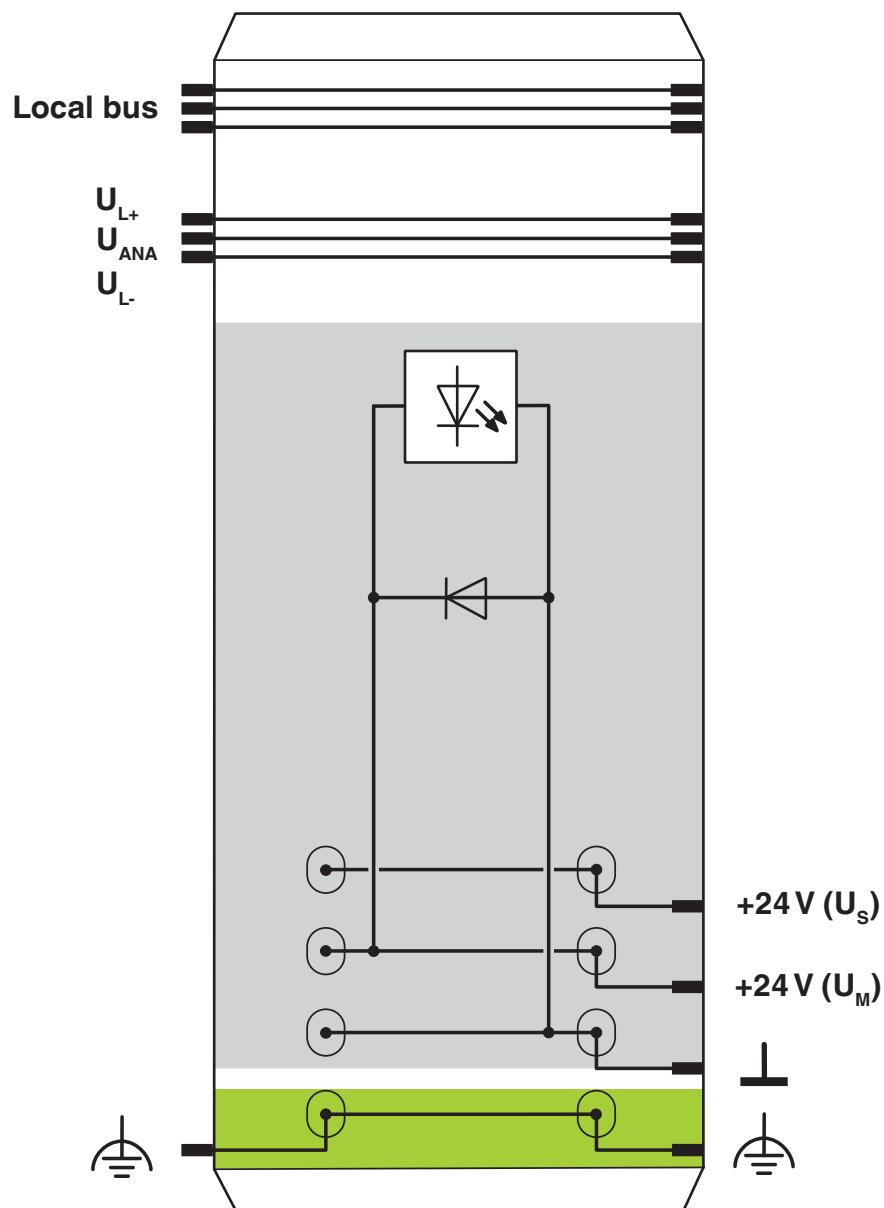

Internal wiring of the terminal points

# IB IL 24 PWR IN-PAC - Feed-in module

2861331

<https://www.phoenixcontact.com/us/products/2861331>



## Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2861331>



**DNV GL**

Approval ID: TAA00000BN



**BV**

Approval ID: 21595/C1 BV

**BSH**

Approval ID: 658a



**RINA**

Approval ID: ELE121121XG

**ABS**

Approval ID: 22-2226444-PDA



**cULus Recognized**

Approval ID: E140324



**Functional Safety**

Approval ID: 968/EL 711.08/23



**cULus Listed**

Approval ID: E199827

# IB IL 24 PWR IN-PAC - Feed-in module



2861331

<https://www.phoenixcontact.com/us/products/2861331>

## Classifications

### ECLASS

ECLASS-13.0	27242610
ECLASS-15.0	27242610

### ETIM

ETIM 9.0	EC001600
----------	----------

### UNSPSC

UNSPSC 21.0	32151600
-------------	----------

# IB IL 24 PWR IN-PAC - Feed-in module

2861331

<https://www.phoenixcontact.com/us/products/2861331>



## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	7299a6fb-f2d4-4905-b023-8a5c6370c144

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

### Phoenix Contact USA

586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)