

# MINI MCR-SL-UI-F - Frequency measuring transducer



2864082

<https://www.phoenixcontact.com/us/products/2864082>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Analog frequency transducers for converting analog standard signals into frequency signals or PWM signals, configurable via DIP switch, with screw connection

## Product description

The 6.2 mm wide configurable analog frequency transducer MINI MCR-SL-UI-F... is used for converting analog standard signals into frequency signals or into pulse width modulated (PWM) signals.

On the input side, there are the analog signals 0...20 mA, 4...20 mA, 0...10 mA, 2...10 mA, 0...10 V, 2...10 V, 0...5 V or 1...5 V

The DIP switches are accessible on the side of the housing and allow the following parameters to be configured:

- Input signal,
- Output signal,
- Output behavior in case the measuring range is exceeded or undershot and
- Filter type (for eliminating malfunctions in the input signal)

Voltage (19.2 V DC to 30 V DC) can be supplied through connection terminal blocks on the modules or in conjunction with the DIN rail connector.

## Your advantages

- Power supply possible via the foot element (TBUS)
- Error indication via diagnostic LED and analog signal
- PWM output of 5 ... 95 %
- Highly-compact analog-to-frequency transducer for electrical isolation, amplification, conversion, and filtering of standard signals to create frequencies or PWM signals
- Input and output signals can be configured via DIP switches
- Configurable interference filter
- 3-way isolation

## Commercial data

Item number	2864082
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	C403
Product key	DK1136
GTIN	4046356046435
Weight per piece (including packing)	108.3 g
Weight per piece (excluding packing)	108.3 g
Customs tariff number	85437090
Country of origin	DE

# MINI MCR-SL-UI-F - Frequency measuring transducer



2864082

<https://www.phoenixcontact.com/us/products/2864082>

## Technical data

### Notes

#### Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

### Product properties

Product type	Frequency value transformer
Product family	MINI Analog
No. of channels	1
Configuration	DIP switches

#### Insulation characteristics

Overvoltage category	II
Pollution degree	2

### System properties

Functionality	
Configuration	DIP switches

### Electrical properties

Electrical isolation between input and output	yes
Step response (0–99%)	< 15 ms (+ (1/f) smallest filter) < 1 s (+ (1/f) largest filter)
Maximum temperature coefficient	< 0.02 %/K
Temperature coefficient, typical	< 0.02 %/K
Maximum transmission error	≤ 0.1 % (> 7 kHz ≤ 0.2 %)

#### Electrical isolation Input/output/power supply

Rated insulation voltage	30 V AC 50 V DC
Test voltage	1.5 kV AC (50 Hz, 60 s)
Insulation	Basic insulation in accordance with IEC/EN 61010

#### Supply

Nominal supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (The DIN rail connector (ME 6,2 TBUS-2 1,5/5-ST-3,81 GN, item no. 2869728) can be used to bridge the supply voltage. It can be snapped onto a 35 mm DIN rail in accordance with EN 60715)
Max. current consumption	< 10 mA (at 24 V DC)
Power consumption	< 200 mW

### Input data

MINI MCR-SL-UI-F - Frequency measuring transducer



2864082

<https://www.phoenixcontact.com/us/products/2864082>

Signal: Voltage/current

Number of inputs	1
Configurable/programmable	Yes
Voltage input signal	0 V ... 5 V 1 V ... 5 V 0 V ... 10 V 2 V ... 10 V
Max. voltage input signal	30 V DC
Current input signal	0 mA ... 20 mA 4 mA ... 20 mA 0 mA ... 10 mA 2 mA ... 10 mA
Max. current input signal	100 mA
Input resistance of voltage input	approx. 110 kΩ
Input resistance current input	approx. 50 Ω
Behavior in the event of an error	Alarm in the form of a red LED

## Output data

Frequency: Frequency

Frequency output	0 Hz ... 10 kHz
	0 Hz ... 5 kHz
	0 Hz ... 2.5 kHz
	0 Hz ... 1 kHz
	0 Hz ... 500 Hz
	0 Hz ... 250 Hz
	0 Hz ... 100 Hz
	0 Hz ... 50 Hz
Load min.	4 mA $\leq$ (U <sub>L</sub> / R <sub>L</sub> ) $\leq$ 20 mA
Output signal PWM	7.8 kHz (10 bit)
	3.9 kHz (10 bit)
	1.9 kHz (12 bit)
	977 Hz (12 bit)
	488 Hz (14 bit)
	244 Hz (14 bit)
	122 Hz (16 bits)
	61 Hz (16 bits)
Load min.	12 mA $\leq$ (U <sub>L</sub> /R <sub>L</sub> ) $\leq$ 20 mA
Load current maximum	20 mA
Maximum switching voltage	30 V
Overrange/underrange	can be set (via DIP switch)
Protective circuit	Short-circuit protection, polarity reversal protection

## Signal

# MINI MCR-SL-UI-F - Frequency measuring transducer



2864082

<https://www.phoenixcontact.com/us/products/2864082>

Number of outputs	1
-------------------	---

## Connection data

Connection method	Screw connection
Stripping length	12 mm
Screw thread	M3
Conductor cross-section rigid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section AWG	26 ... 12

## Dimensions

Dimensional drawing	
Width	6.2 mm
Height	93.1 mm
Depth	101.2 mm

## Material specifications

Color	green (RAL 6021)
Housing material	PBT
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 2

## Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 65 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	≤ 2000 m
Permissible humidity (operation)	5 % ... 95 % (non-condensing)

## Approvals

CE	
Certificate	CE-compliant

UKCA	
Certificate	UKCA-compliant

UL, USA/Canada	
----------------	--

# MINI MCR-SL-UI-F - Frequency measuring transducer

2864082

<https://www.phoenixcontact.com/us/products/2864082>



Identification	UL 508 Recognized Class I, Div. 2, Groups A, B, C, D T4
----------------	--

Shipbuilding approval	
Certificate	DNV GL TAA000020N

Shipbuilding data	
Temperature	B
Humidity	B
Vibration	B
EMC	A
Enclosure	Required protection according to the Rules shall be provided upon installation on board

## EMC data

Electromagnetic compatibility	Conformance with EMC directive
Noise immunity	EN 61000-6-2
Note	When being exposed to interference, there may be minimal deviations.

Noise emission	
Standards/regulations	EN 61000-6-4

Electrostatic discharge	
Standards/regulations	EN 61000-4-2

Electrostatic discharge	
Comments	Safety measures must be taken to prevent electrostatic discharge.

Electromagnetic HF field	
Designation	Electromagnetic RF field
Standards/regulations	EN 61000-4-3

Typical deviation from the measuring range final value	2 %
Fast transients (burst)	
Designation	Fast transients (burst)
Standards/regulations	EN 61000-4-4
Typical deviation from the measuring range final value	2 %

Surge current load (surge)	
Standards/regulations	EN 61000-4-5

Surge current load (surge)	
Comments	Criterion B

Conducted interference	
Designation	Conducted interferences
Standards/regulations	EN 61000-4-6
Typical deviation from the measuring range final value	2 %

# MINI MCR-SL-UI-F - Frequency measuring transducer

2864082

<https://www.phoenixcontact.com/us/products/2864082>



## Mounting

Mounting type	DIN rail mounting
Mounting position	any

# MINI MCR-SL-UI-F - Frequency measuring transducer


2864082

<https://www.phoenixcontact.com/us/products/2864082>



## Drawings

Dimensional drawing

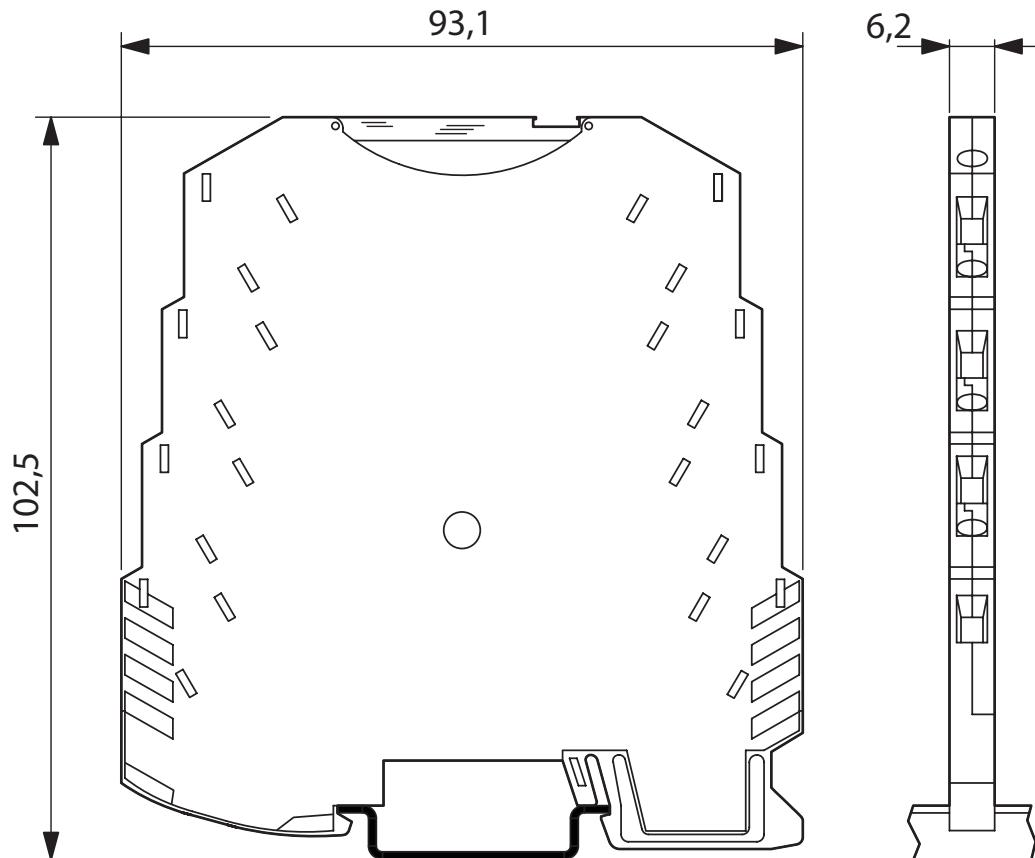

# MINI MCR-SL-UI-F - Frequency measuring transducer


2864082

<https://www.phoenixcontact.com/us/products/2864082>




Diagram

## Frequency output

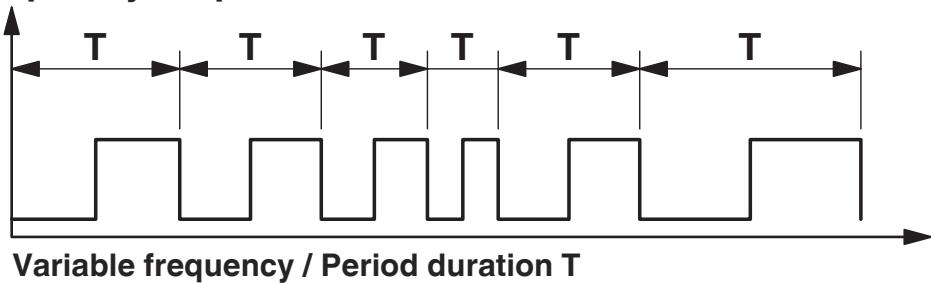

Variable frequency / Period duration  $T$

## PWM output (pulse width modulation)

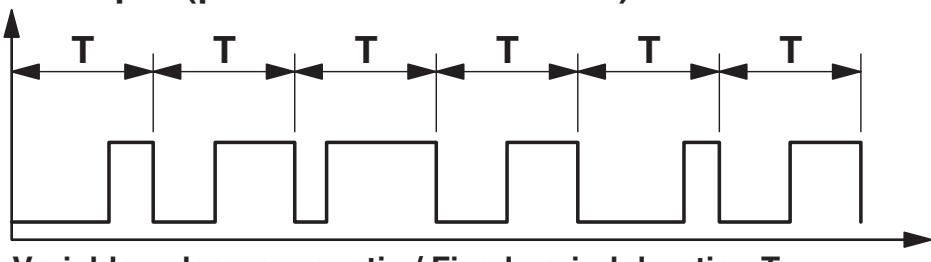

Variable pulse-pause ratio / Fixed period duration  $T$


MINI MCR-SL-UI-F - Frequency measuring transducer

2864082

<https://www.phoenixcontact.com/us/products/2864082>

**PHÖNIX CONTACT**

## Block diagram

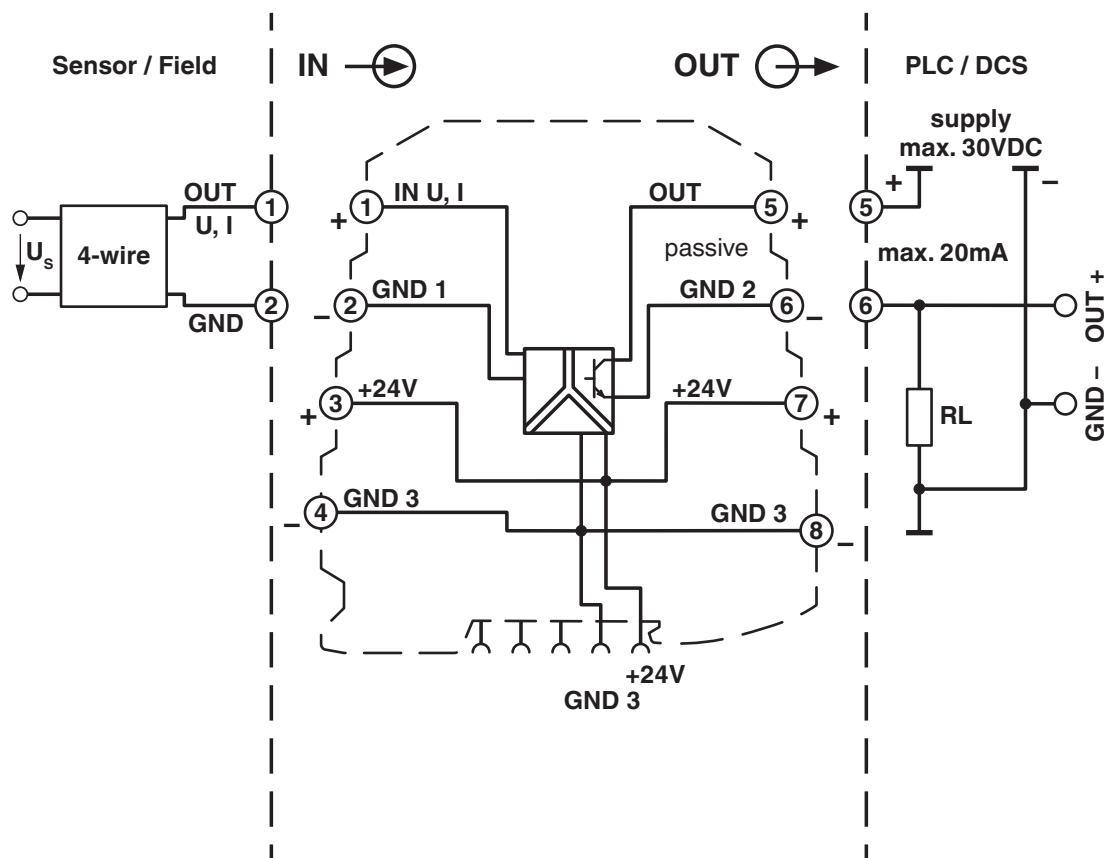

# MINI MCR-SL-UI-F - Frequency measuring transducer

2864082

<https://www.phoenixcontact.com/us/products/2864082>



## Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2864082>



**cUL Recognized**

Approval ID: E238705



**UL Recognized**

Approval ID: E238705



**DNV**

Approval ID: TAA000020N



**BV**

Approval ID: 39933/C0 BV



**cUL Listed**

Approval ID: E199827



**UL Listed**

Approval ID: E199827

# MINI MCR-SL-UI-F - Frequency measuring transducer

2864082

<https://www.phoenixcontact.com/us/products/2864082>



## Classifications

### ECLASS

ECLASS-13.0	27210128
ECLASS-15.0	27210128

### ETIM

ETIM 9.0	EC002918
----------	----------

### UNSPSC

UNSPSC 21.0	39121000
-------------	----------

# MINI MCR-SL-UI-F - Frequency measuring transducer

2864082

<https://www.phoenixcontact.com/us/products/2864082>



## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	c4b793f9-7223-41cb-8e4d-47399aac04d7

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

### Phoenix Contact USA

586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)