

# VIP-CAB-FLK50/ 8,0M/S/SC057 - Cable



2906079

<https://www.phoenixcontact.com/us/products/2906079>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Assembled shielded round cable with additional shield connection and two molded 50-pos. socket strips (1:1 connection). The cable has two 180° punched-on connectors, cable length: 8 m

## Your advantages

- 50-pos.
- 1:1 connection

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 2906079       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Product key                          | DK2AH2        |
| GTIN                                 | 4055626026923 |
| Weight per piece (including packing) | 1,573 g       |
| Weight per piece (excluding packing) | 1,573 g       |
| Country of origin                    | DE            |

## Technical data

### Product properties

|                                                                   |                       |
|-------------------------------------------------------------------|-----------------------|
| Product type                                                      | System cable          |
| Insulation characteristics: Air clearances and creepage distances |                       |
| Insulation                                                        | Functional insulation |
| Overvoltage category                                              | II                    |
| Pollution degree                                                  | 2                     |

### Environmental and real-life conditions

#### Ambient conditions

|                                                         |                                          |
|---------------------------------------------------------|------------------------------------------|
| Degree of protection                                    | IP20                                     |
| Degree of protection (Installation location)            | ≥ IP54 (Installation location)           |
| Ambient temperature (operation) (fixed installation)    | -40 °C ... 70 °C (fixed installation)    |
| Ambient temperature (operation) (flexible installation) | -10 °C ... 70 °C (flexible installation) |
| Ambient temperature (storage/transport)                 | -40 °C ... 80 °C                         |
| Altitude                                                | ≤ 2000 m                                 |

### Electrical properties

|                        |                       |
|------------------------|-----------------------|
| Operating voltage (DC) | ≤ 24 V DC             |
| Nominal operating mode | 100% operating factor |
| Current (Per path)     | ≤ 0.5 A               |

#### Air clearances and creepage distances

|                          |                    |
|--------------------------|--------------------|
| Rated insulation voltage | 50 V               |
| Rated surge voltage      | 0.5 kV (1.2/50 µs) |

### Cable/line

|              |     |
|--------------|-----|
| Cable length | 8 m |
|--------------|-----|

#### 50X0.14 [PVC]

|                                 |                                |
|---------------------------------|--------------------------------|
| UL AWM Style                    | 2464/1061                      |
| Number of positions             | 50                             |
| Shielded                        | yes                            |
| Cable type                      | 50X0.14 [PVC]                  |
| Conductor type                  | Assembled shielded round cable |
| Conductor structure signal line | 7x 0.16 mm                     |
| AWG signal line                 | 26                             |
| Conductor cross section         | 50x 0.14 mm <sup>2</sup>       |
| Wire diameter incl. insulation  | 1 mm ±0.03 mm                  |
| External cable diameter         | 11.00 mm ±0.3 mm               |
| Outer sheath, material          | Semi-rigid PVC                 |
| External sheath, color          | gray                           |

# VIP-CAB-FLK50/ 8,0M/S/SC057 - Cable



2906079

<https://www.phoenixcontact.com/us/products/2906079>

|                                               |                                                                        |
|-----------------------------------------------|------------------------------------------------------------------------|
| Conductor material                            | Tin-plated Cu litz wires                                               |
| Cable resistance                              | $\leq 145 \Omega/\text{km}$ (at 20 °C)                                 |
| Insulation resistance                         | $\geq 20 \text{ M}\Omega \cdot \text{km}$ (20 °C)                      |
| Smallest bending radius, fixed installation   | 114 mm                                                                 |
| Smallest bending radius, movable installation | 205 mm                                                                 |
| Dynamic load capacity (bending)               | Max. bending cycles: 5000 (at a radius of $\geq 18x$ outside diameter) |
| Halogen-free                                  | no                                                                     |
| Flame resistance                              | IEC 60332-1-2 (raw cable)                                              |
|                                               | VDE 0842, Part 332-1-2 (raw cable)                                     |
|                                               | IEC 60332-3-22 (raw cable)                                             |
|                                               | UL VW-1                                                                |
|                                               | CSA FT-1                                                               |
| Resistance to oil                             | can withstand occasional splashes (raw cable)                          |
| Cable type                                    | Cable for one module                                                   |

## Connection data

### Flat-ribbon cable connector

|                                  |                      |
|----------------------------------|----------------------|
| Connection in acc. with standard | IEC 60603-13         |
| Connection method                | IDC/FLK socket strip |
| Number of connections            | 1                    |
| Number of positions              | 50                   |
| Exit angle                       | 180 °                |
| Insertion/withdrawal cycles      | > 200                |
| Pitch                            | 2.54 mm              |

### Flat-ribbon cable connector

|                                  |                      |
|----------------------------------|----------------------|
| Connection in acc. with standard | IEC 60603-13         |
| Connection method                | IDC/FLK socket strip |
| Number of connections            | 1                    |
| Number of positions              | 50                   |
| Exit angle                       | 180 °                |
| Insertion/withdrawal cycles      | > 200                |
| Pitch                            | 2.54 mm              |

## Standards and regulations

### Air clearances and creepage distances


|                       |              |
|-----------------------|--------------|
| Standards/regulations | DIN EN 50178 |
|-----------------------|--------------|

## Notes

|                    |                                                                                                                                                                                                                                                                                |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Notes on operation | For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met. |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Drawings

Diagram

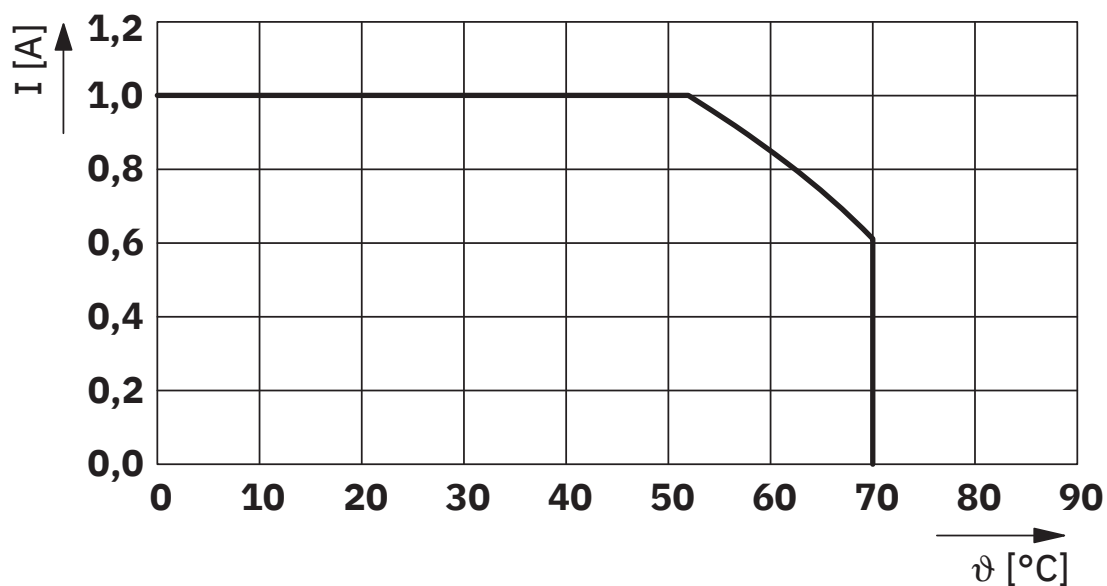

Maximum permissible current per path in uncoiled state

# VIP-CAB-FLK50/ 8,0M/S/SC057 - Cable



2906079

<https://www.phoenixcontact.com/us/products/2906079>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27242220 |
|-------------|----------|

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC000237 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

# VIP-CAB-FLK50/ 8,0M/S/SC057 - Cable



2906079

<https://www.phoenixcontact.com/us/products/2906079>

## Environmental product compliance

### EU RoHS

|                                         |                    |
|-----------------------------------------|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|-----------------------------------------|--------------------|

### China RoHS

|                                        |                                          |
|----------------------------------------|------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-E                                   |
|                                        | No hazardous substances above the limits |

### EU REACH SVHC

|                                     |                            |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)