

EMG 17-OV-TTL/ 24DC/2 - Solid-state relay module



2943259

<https://www.phoenixcontact.com/us/products/2943259>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Power solid-state relay, with LED and protective circuit in input and output circuits, input: TTL 5 V DC, output: short-circuit-proof, 24 V DC/max. 2 A



Commercial data

Item number	2943259
Packing unit	10 pc
Minimum order quantity	1 pc
Sales key	C460
Product key	DK61C1
GTIN	4017918107543
Weight per piece (including packing)	54.4 g
Weight per piece (excluding packing)	54.4 g
Customs tariff number	85364190
Country of origin	DE

EMG 17-OV-TTL/ 24DC/2 - Solid-state relay module

2943259

<https://www.phoenixcontact.com/us/products/2943259>



Technical data

Notes

Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

Product properties

Product type	Solid-state relay module
Application	TTL signal at input
Operating mode	100% operating factor

Insulation characteristics

Insulation	Basic insulation
Oversupply category	III
Pollution degree	2

Data management status

Date of last data management	15.09.2025
------------------------------	------------

Electrical properties

Test voltage (Input/output)	2.5 kV AC (Input/output)
-----------------------------	--------------------------

Input data

Nominal input voltage U_N	5 V DC (TTL)
Input voltage range in reference to U_N	0.8 ... 1.2
Input voltage range	4 V DC ... 6 V DC
Switching threshold "0" signal, voltage	0.8 V (TTL)
Switching threshold "1" signal voltage	2 V (TTL)
Typical input current at U_N	2.6 mA
Typical response time	170 μ s
Typical turn-off time	190 μ s
Status display	LED (yellow)
Protective circuit	Reverse polarity protection; Polarity protection diode
	Surge protection; Suppressor diode
	Free running; Freewheeling diode
Auxiliary voltage TTL input	5 V DC $\pm 20\%$
Auxiliary current TTL input	2.8 mA
Transmission frequency	1000 Hz

Output data

Contact switching type	1 N/O contact
Design of digital output	electronic
Output voltage range	10 V DC ... 30 V DC

EMG 17-OV-TTL/ 24DC/2 - Solid-state relay module

2943259

<https://www.phoenixcontact.com/us/products/2943259>



Limiting continuous current	2 A (see derating curve)
Leakage current	150 µA
Peak offstate voltage	33 V DC (Collector-emitter reverse voltage)
Current limitation at short-circuits	> 2 A (short-circuit-proof)
Voltage drop at max. limiting continuous current	≤ 0.3 V
Output circuit	3-conductor, ground-referenced
Error indication	Red LED
Protective circuit	Reverse polarity protection; Polarity protection diode
	Freewheeling diode; Freewheeling diode
	Surge protection; Suppressor diode

Connection data

Input side

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross-section rigid	0.2 mm ² ... 4 mm ²
Conductor cross-section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross-section AWG	24 ... 12

Output side

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross-section rigid	0.2 mm ² ... 4 mm ²
Conductor cross-section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross-section AWG	24 ... 12

Dimensions

Width	17.5 mm
Height	75 mm
Depth	102 mm

Material specifications

Color	green (RAL 6021)
Flammability rating according to UL 94	V0

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Standards and regulations

EMG 17-OV-TTL/ 24DC/2 - Solid-state relay module

2943259

<https://www.phoenixcontact.com/us/products/2943259>



Standards/regulations	IEC 60664
	EN 50178

Mounting

Mounting type	DIN rail mounting
Assembly note	in rows with zero spacing
Mounting position	any

EMG 17-OV-TTL/ 24DC/2 - Solid-state relay module




2943259

<https://www.phoenixcontact.com/us/products/2943259>

Drawings

Circuit diagram

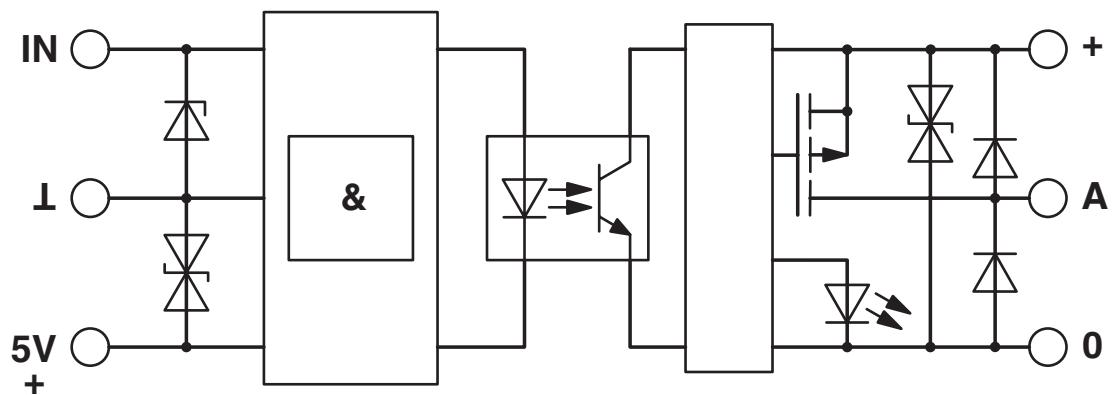

EMG 17-OV-TTL/ 24DC/2 - Solid-state relay module

2943259

<https://www.phoenixcontact.com/us/products/2943259>



Classifications

ECLASS

ECLASS-13.0	27371604
ECLASS-15.0	27371604

ETIM

ETIM 9.0	EC001504
----------	----------

UNSPSC

UNSPSC 21.0	39122300
-------------	----------

EMG 17-OV-TTL/ 24DC/2 - Solid-state relay module

2943259

<https://www.phoenixcontact.com/us/products/2943259>



Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-50
An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	29fd27b8-0caa-46f7-bad7-2a5b41b51f4d

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA

586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com