




Powering Business Worldwide

# Eaton 9PX 72V Lithium-ion Extended Battery Module (EBM) used with 9PX2000RT-L, 9PX2000RTN-L, 9PX2200GRT-L, 9PX3000RT-L, 9PX3000RTN-L, 9PX3000GRT-L UPS, 1U Rack/Tower

MODEL NUMBER: 9PXEBM72RT-L

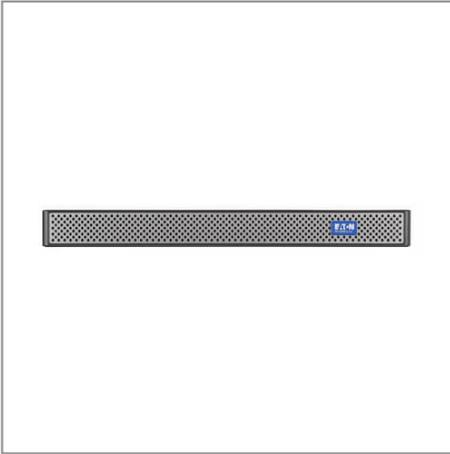

Lithium-ion extended battery module (EBM) provides extended runtime for compatible UPS systems in small business, education, retail, financial or healthcare applications.

## Features

### Backup Battery Module Gives Your Compatible Eaton UPS System Extended Runtime

The 9PXEBM72RT-L offers extended battery runtime when used in conjunction with Eaton's 9PX2000RT-L, 9PX2000RTN-L, 9PX2200GRT-L, 9PX3000RT-L, 9PX3000RTN-L and 9PX3000GRT-L 9PX UPS systems. It can also be daisy-chained for a maximum of four matching battery packs to deliver even longer extended-run operation. Heavy-gauge cabling with high-current DC connectors is included for safe, simple installation.

### Supports 1U Rack or Tower Installation

This backup battery pack's multi-use form factor supports mounting in 1U of space in EIA-standard 19-inch open frame racks or enclosures using the included 4-post rail kit and mounting brackets. Tower stands from a compatible UPS support optional upright configuration of the battery pack.

## Specifications

OVERVIEW	
UPC Code	743172105608
INPUT	
Input Phase	Single-Phase
OUTPUT	
Individually Controllable Load Banks	No

## Highlights

- Connects to select expandable Eaton 9PX UPS systems for extended runtime
- Daisy-chain connector supports additional battery packs for even longer runtime
- Includes heavy-gauge cabling with high-current 72V DC connectors
- Supports 1U rack mounting or upright tower installation using included kit accessories

## System Requirements

Compatible only with Eaton's 9PX2000RT-L, 9PX2000RTN-L, 9PX2200GRT-L, 9PX3000RT-L, 9PX3000RTN-L and 9PX3000GRT-L 9PX UPS systems

## Package Includes

- 9PXEBM72RT-L 72V Extended Battery Module
- External battery cable
- Rack-mounting hardware
- Stabilizer bracket
- Quick Start Guide



Powering Business Worldwide

BATTERY	
Battery Type	Lithium-ion (LiFePO4)
Expandable Runtime	No
DC System Voltage (VDC)	72
Battery Management	Integrated battery management system (BMS) for temperature regulation and life cycle monitoring
PHYSICAL	
Primary Form Factor	Rackmount; Tower
Rack Height	1U
External Battery Pack Form Factor	Rack/Tower
Installation Form Factors Supported with Included Accessories	4 post 19 inch rackmount
Installation Form Factors Supported with Optional Accessories	2 post rackmount ( <a href="https://tripplite.eaton.com/eaton-2-post-rack-mount-installation-kit-for-select-1u-5p-ups-systems-RK2PA">RK2PA</a> )
Minimum Required Rack Depth (cm)	68.58
Minimum Required Rack Depth (inches)	27
Unit Dimensions (hwd / in.)	1.700 x 17.200 x 23.700
Unit Weight (lbs.)	46.600
Unit Weight (kg)	21.14
ENVIRONMENTAL	
Operating Temperature Range	32° to 104°F (0° to 40°C)
Relative Humidity	0-96% non-condensing
STANDARDS & COMPLIANCE	
Product Certifications	cTUVus; NOM (Mexico); EN 62040-2; ICC-ES AC156 OSHPD Seismic Certified
Product Compliance	FCC Part 15 Class B (USA); RoHS
WARRANTY & SUPPORT	
Product Warranty Period (U.S. & Canada)	5-year limited warranty

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
<https://tripplite.eaton.com>

© 2026 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.