

Technical data sheet

Load monitoring · LOCC-Box Accessories

LOCC-Box empty housing without terminals



Identification

Type	LOCC-Box-DY 7-6424
Part No.	716424

Product version

Hardware revision	2.0
Datasheet version	04

Description

Description	The LOCC-Box empty housing without contacts or terminals can be used as a placeholder for future expansions. The housing is provided with an unprinted transparent cover.
-------------	--

General

Accessories	Empty housing without terminals
Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)
Color of the housing	Basalt grey
Mounting	DIN rail mountable TS35 (EN 60715)
Installation position	Any
Dimensions (w × h × d)	8.1 mm × 107.4 mm × 116.0 mm
Weight/unit	0.102 kg
PU (units)	2

General ambient conditions

Operation temperature range	-25 °C ... +50 °C
Storage temperature range	-40 °C ... +85 °C

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt
Tel. +49 (0)7151 6053-0 • Fax +49 (0)7151 6053-277(-288)
www.luetze.de • info@luetze.de

24.04.2024 • Subject to technical modification

Part No. [716424](#) • Datasheet version: 04

page 1 of 2

Technical data sheet


Load monitoring · LOCC-Box Accessories

Relative air humidity	10 % – 95 %, without condensation
Vibration resistance	4 g acc. to EN 60068-2-6
Shock resistance	15 g acc. EN 60068-2-27

Certifications/Standards

Certifications	cULus (E135145)
Standards	EN 60947-1
	EN 60947-5-1
	UL 60947-5-1
	DNVGL-CG-0339
	Temperature Class D – not certified
	Humidity Class B – not certified
	Vibration Class B – not certified
	Enclosure Class A – not certified

Dimensions

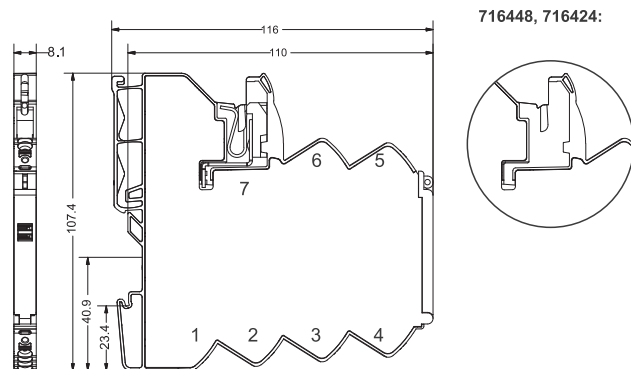

Use

