

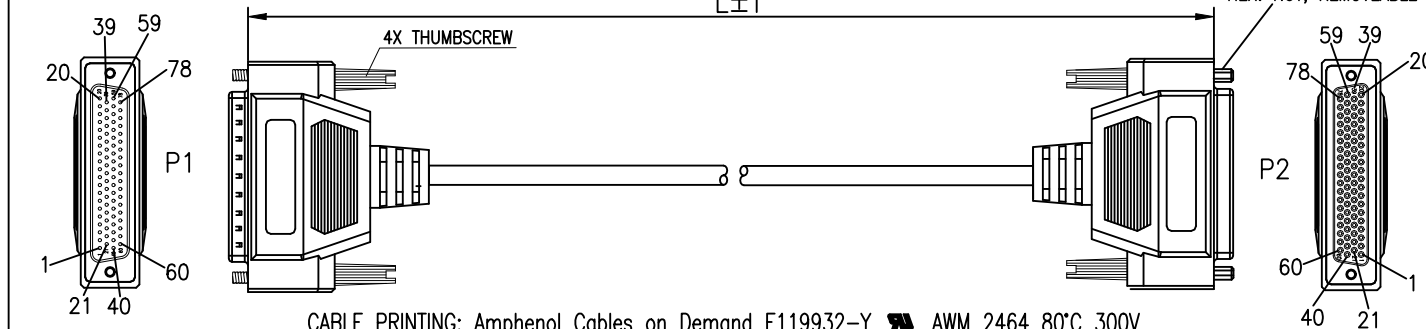
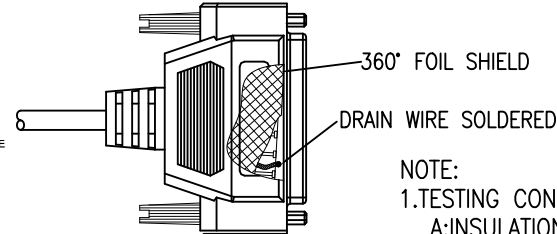


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE, TO THIRD PARTIES, IN PART OR WHOLE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.



| REVISIONS | | | |
|-----------|---|--------------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A1 | Add wiring color | 16/JAN/2012 | |
| A2 | Add Length: 4.3FT; 5.6FT; 6.6FT; 7.9FT. | 18/APR/2012 | |
| A3 | Add Length: 25CM | 22/AUG/2016 | |
| A4 | CHANGE CABLE PRINTING | 28/JULY/2025 | |

CABLE PRINTING: Amphenol Cables on Demand E119932-Y AWM 2464 80°C 300V
28AWG VW-1 LL84201 CSA AWM I/II A 80°C 300V 28AWG FT1 COPARTNER

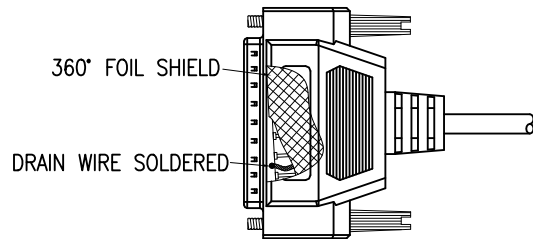

NOTE:

1. TESTING CONDITIONS:

A: INSULATION RESISTANCE: 10MΩ

B: VOLTAGE: DC300V/0.01S

C: CONDUCTOR RESISTANCE 2Ω (≤3M), 5Ω (>3M, <10M), 8MΩ ≥10Ω

2. SHIELDING: COPPER FOIL TAPE COVER PREMOLD 360°, DRAIN WIRE SOLDER TO CONNECTOR SHELL

PIN OUT

| INNER LAYER CODE | | MIDDLE LAYER CODE | | OUTER LAYER CODE | |
|------------------|----|-------------------|----|------------------|------------------|
| P1 | P2 | P1 | P2 | P1 | P2 |
| 1 | 1 | 29 | 29 | 51 | 51 |
| 2 | 2 | 30 | 30 | 52 | 52 |
| 3 | 3 | 31 | 31 | 53 | 53 |
| 4 | 4 | 32 | 32 | 54 | 54 |
| 5 | 5 | 33 | 33 | 55 | 55 |
| 6 | 6 | 34 | 34 | 56 | 56 |
| 7 | 7 | 35 | 35 | 57 | 57 |
| 8 | 8 | 36 | 36 | 58 | 58 |
| 9 | 9 | 37 | 37 | 59 | 59 |
| 10 | 10 | 38 | 38 | 60 | 60 |
| 11 | 11 | 39 | 39 | 61 | 61 |
| 12 | 12 | 40 | 40 | 62 | 62 |
| 13 | 13 | 41 | 41 | 63 | 63 |
| 14 | 14 | 42 | 42 | 64 | 64 |
| 15 | 15 | 43 | 43 | 65 | 65 |
| 16 | 16 | 44 | 44 | 66 | 66 |
| 17 | 17 | 45 | 45 | 67 | 67 |
| 18 | 18 | 46 | 46 | 68 | 68 |
| 19 | 19 | 47 | 47 | 69 | 69 |
| 20 | 20 | 48 | 48 | 70 | 70 |
| 21 | 21 | 49 | 49 | 71 | 71 |
| 22 | 22 | 50 | 50 | 72 | 72 |
| 23 | 23 | | | 73 | 73 |
| 24 | 24 | | | 74 | 74 |
| 25 | 25 | | | 75 | 75 |
| 26 | 26 | | | 76 | 76 |
| 27 | 27 | | | 77 | 77 |
| 28 | 28 | | | 78 | 78 |
| | | | | SHELL | SHELL DRAIN WIRE |


P/N CHART

| ACD P/N | L±T | |
|---------------------|---------------|-------------|
| CS-DSDHD78MF0-002.5 | 2.5FT±1inch | 762±25mm |
| CS-DSDHD78MF0-005 | 5FT±2inch | 1524±51mm |
| CS-DSDHD78MF0-010 | 10FT±3inch | 3048±76mm |
| CS-DSDHD78MF0-025 | 25FT±4inch | 7620±102mm |
| CS-DSDHD78MF0-050 | 50FT±8inch | 15240±203mm |
| CS-DSDHD78MF0-004.3 | 4.3FT±1.2inch | 1311±30mm |
| CS-DSDHD78MF0-005.6 | 5.6FT±1.2inch | 1707±30mm |
| CS-DSDHD78MF0-006.6 | 6.6FT±2inch | 2012±40mm |
| CS-DSDHD78MF0-007.9 | 7.9FT±2inch | 2408±50mm |



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

| | | | |
|----------|------|--------|-----|
| DECIMALS | ±X | ANGLES | ±X° |
| X | ±X | | |
| XX | ±XX | | |
| XXX | ±XXX | | |



CAD FILE:

| | |
|-------------|------|
| EAR NO. | |
| APPROVALS | DATE |
| DRAWN XF | |
| CHECKED HYJ | |
| RESP ENG | |
| MFG ENG | |

| | |
|--|----------------------------|
| Amphenol Cables on Demand | |
| 20 VALLEY ST. ENDICOTT, NY 13760 | |
| ASM CBL Deluxe High Density 78PIN D-Sub MF | |
| SIZE A | DWG. NO. CS-DSDHD78MF0-XXX |
| REV. A4 | |

NOTES: UNLESS OTHERWISE SPECIFIED

SCALE: N/A SHEET 1 OF 1