


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE, TO THIRD PARTIES, IN PART OR WHOLE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A4	Changed drawing number on page 2	6/DEC/2022	
A5	CHANGE CABLE PRINTING	28/JULY/2025	
A6	INCREASE 50FT LENGTH	13/JAN/2026	

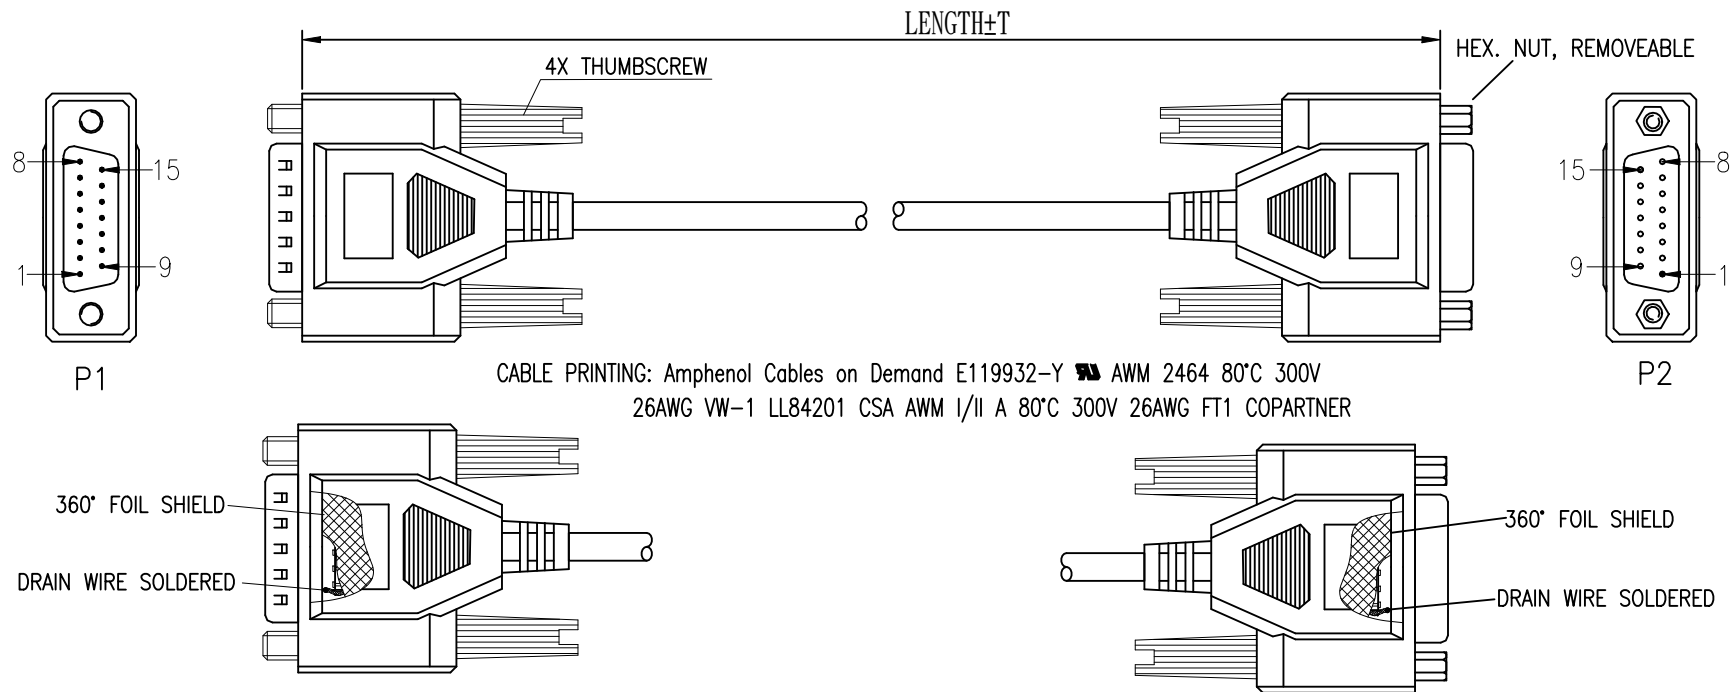

CABLE PRINTING: Amphenol Cables on Demand E119932-Y AWM 2464 80°C 300V  
26AWG VW-1 LL84201 CSA AWM I/II A 80°C 300V 26AWG FT1 COPARTNER

NOTE:

1. TESTING CONDITIONS:

A: INSULATION RESISTANCE: 10MΩ

B: VOLTAGE: DC300V/0.01S

C: CONDUCTOR RESISTANCE 2Ω(≤3M), 5Ω(>3M,<10M), 8M≥10Ω

2. SHIELDING: AL-FOIL TAPE COVER PREMOLD 360°,  
DRAIN WIRE SOLDER TO CONNECTOR SHELL

PIN OUT

P1	P2	P1	P2
1	1 BLACK	9	9 GREY
2	2 BROWN	10	10 WHITE
3	3 RED	11	11 PINK
4	4 ORANGE	12	12 LIGHT GREEN
5	5 YELLOW	13	13 BLACK/WHITE
6	6 GREEN	14	14 BROWN/WHITE
7	7 BLUE	15	15 RED/WHITE
8	8 PURPLE	SHELL	SHELL DRAIN

P/N CHART

ACD P/N	LENGTH±T	
CS-DSSMDB15MF-002.5	2.5FT±1inch	762±25mm
CS-DSSMDB15MF-005	5FT±2inch	1524±51mm
CS-DSSMDB15MF-010	10FT±3inch	3048±76mm
CS-DSSMDB15MF-015	15FT±3inch	4572±76mm
CS-DSSMDB15MF-025	25FT±4inch	7620±102mm
CS-DSSMDB15MF-050	50FT±8inch	15240±203mm



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		EAR NO.		Amphenol Cables on Demand 20 VALLEY ST. ENDICOTT, NY 13760	
DECIMALS	ANGLES	APPROVALS	DATE		
.X ±X	± X°	DRAWN	XF	Std 15Pin D-Sub - Male/Female, ***	
.XX ±XX		CHECKED	HYJ		
.XXX ±XXX		RESP ENG			
THIRD ANGLE PROJECTION		MFG ENG		SIZE	DWG. NO.
				A	CS-DSSMDB15MF-XXX
CAD FILE:				REV.	A6
				SCALE:	N/A
				SHEET	1 OF 1

NOTES: UNLESS OTHERWISE SPECIFIED