



Features

- Narrow Band
- High Rejection
- Medium to High Power Handling

Applications

- SATCOM Satellite Link RX
- Communications
- EW Applications



**Image may be a representation of the final product and see outline for details.

Product Overview

The QCB011-CSMA is a 50 Ω bandpass filter in a rugged connectorized package. This filter is intended for SATCOM Datalink Receive/Transmit applications this filter provides a very narrow passband with high out of band rejections close in to the operational frequency.

Electrical Specifications @ 25°C

Over Temperature information available when requested

Characteristic Impedance 50 Ω

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Insertion Loss Passband	14400 — 14930		2.0	2.2	dB
Insertion Loss Center Frequency	14665		1.5		dB
Return Loss	14400 — 14930	14	15		dB
Lower Rejection Stop Band	1000 — 14000	55	58		dBc
Lower Rejection Stop Band	14000 — 14200	20	23		dBc
Upper Rejection Stop Band	15150 — 15300	25	28		dBc
Upper Rejection Stop Band	15300 — 18000	55	58		dBc

*Contact Factory if additional parameters are required such as: Ripple, Phase Linearity, Group Delay, etc...

** Contact Factory for package options such as: SMT, Microstrip, etc.





Absolute Maximum Ratings

Permanent Damage may occur if any of these limits are exceeded


Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +150°C
Input Power	2 Watt

*Contact Factory to request information if higher power rating capabilities required


Typical Performance Graphs @ 25°C

Performance may be simulated contact factory for details or associated S-Parameter files.


Insertion Loss/Return Loss

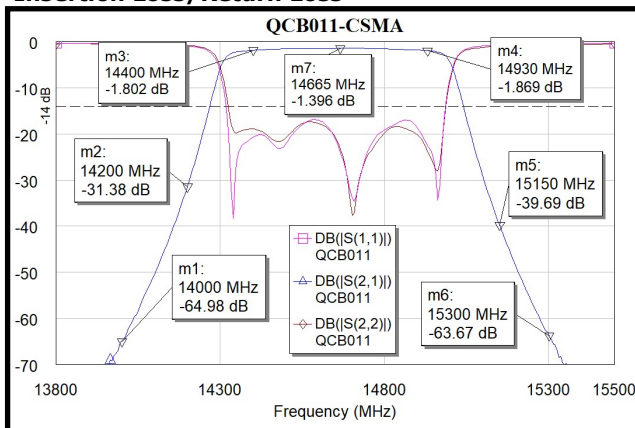


Insertion Loss (zoomed)

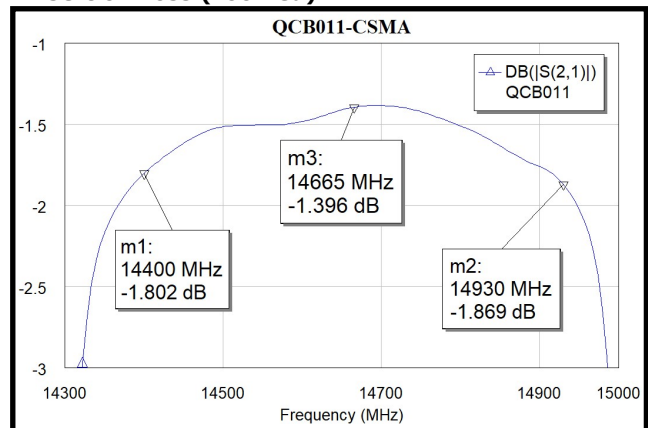

Return Loss (zoomed)

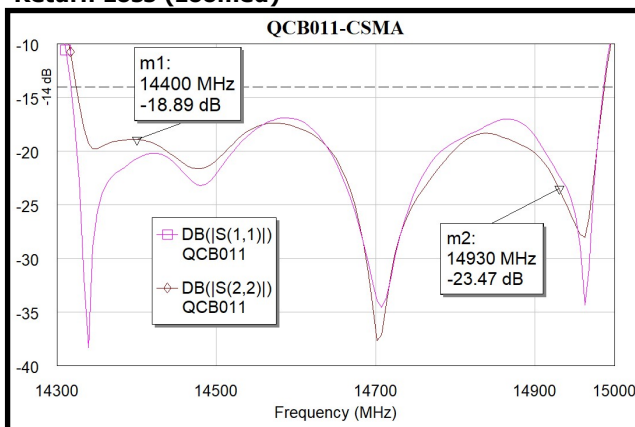


Group Delay

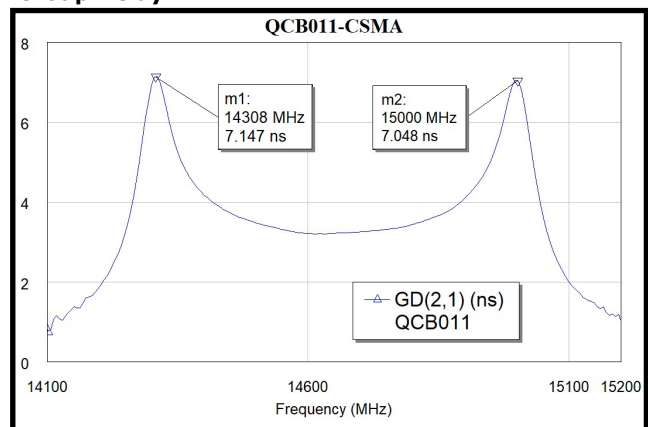



Mechanical Detail

1) Material	HOUSING: ALUMINUM, 6061-T6 ; COVER: ALUMINUM, 6061
2) Finish	GRAY PAINT
3) Hermeticity	ENVIRONMENT SEAL
4) Input/Output	SMA (F), FINISH PASSIVATED STAINLESS STEEL.
5) Marking	POLYIMIDE LABEL, GLOSSY WHITE
6) RoHs Compliance	ROHS COMPLIANT
6) Package	901588

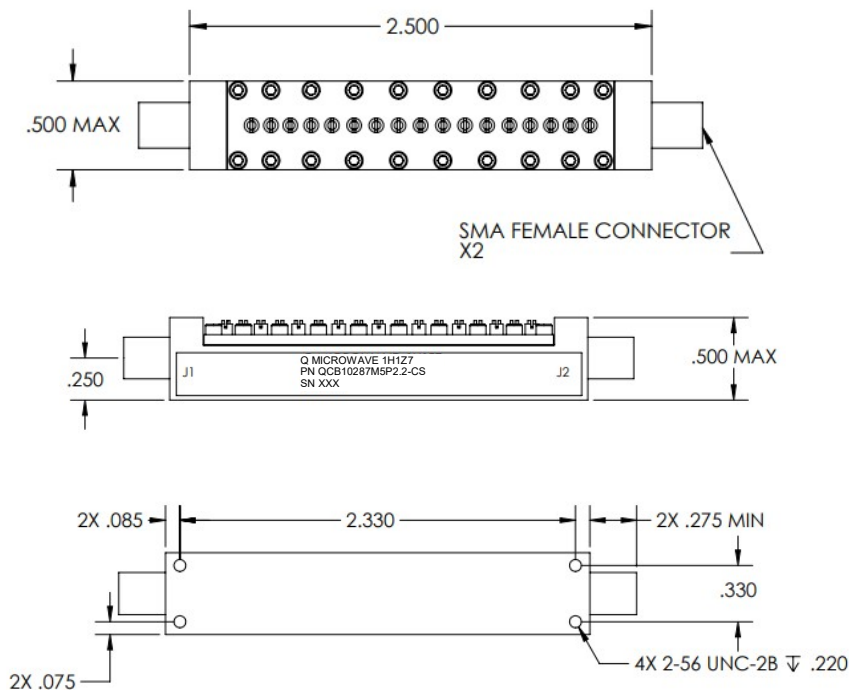

Important Notice

The information contained herein is believed to be reliable; however, Q Microwave makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Q Microwave products. The information contained herein, or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND Q MICROWAVE, INC. HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Q Microwave, Inc. products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Q Microwave's Standard Terms & Conditions Apply (Unless Otherwise Specified): www.qmicrowave.com/sales

