

Technical data sheet

Interface Technology · LCIS Mechanical Relay

Input Relay Interface, relay with 1 directional contact / SPDT relay

AC/DC 250 V, 6 A, 1500 VA / 144 W

Screw terminal / Push-In, contact material: AgSnO₂ + 5 µm HV



Identification

Type	LCIS-RGE230UP-S-1U-HTV
Part No.	760064.0010

Product version

Hardware revision	1.0
Datasheet version	04

Input

Rated voltage U _N	AC/DC 230 V
Input voltage range	184 V – 253 V
Rated frequency f _N	50 Hz / 60 Hz
Rated current I _N	3.6 mA
Protection device Input	Bridge rectifier
Max. length of connecting lead	DC: 1000 m / AC: 500 m
Status display input	LED green
Interrupting voltage	<12.7 V

Output

Contact type	1 changeover contacts / SPDT
Max. switching voltage	AC/DC 250 V
Max. switching current	AC/DC 6 A
Switching capacity DC 13	1 A @ 24 V 200 mA @ 125 V 100 mA @ 250 V
Switching capacity AC 15	3 A

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk

Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt
Tel. +49 (0)7151 6053-0 • Fax +49 (0)7151 6053-277(-288)
www.luetze.de • info@luetze.de

15.03.2024 • Subject to technical modification

Part No. [760064.0010](#) • Datasheet version: 04

page 1 of 4



SYSTEMATIC TECHNOLOGY

Technical data sheet

Interface Technology · LCIS Mechanical Relay

Max. switching capacity	1500 VA / 144 W
Contact material	AgSnO ₂ + 5 µm HV
Mechanical service life	> 10 x 10 ⁶ operations
Inrush current	16 A (4 ms)
Switch-on delay	10 ms
Shutdown delay	15 ms
Protection device	None
Max. length of connecting lead	DC: 1000 m / AC: 500 m
Degree of protection	IP20
Comments	Hard gold-plated contacts: So that the gold layer is not damaged, the specified values are not permitted to be exceeded. At higher switching capacity, the gold layer vaporizes. The deposition in the housing can lead to sparkovers between the coil and contact.

General

Housing material	PA 6.6 (UL 94 V-0)
Color of the housing	RAL 7012 Basalt grey
Degree of protection	IP20
Mounting	DIN rail mountable TS35 (EN 60715)
Installation position	Any
Insulation voltage input / output	4.0 kV _{eff}
Safe isolation	yes
Clearance/creepage dist. (control/ load side)	>5.5 mm
Rated insulation voltage (EN 50178)	300 V
Connection type	Screw terminal Single wire 0.25 mm ² – 2.5 mm ² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm ² – 1.5 mm ² / AWG 24–16
Strip length	6 mm
Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
Weight/unit	0.03 kg
PU (units)	5

General ambient conditions

Operation temperature range	-25 °C ... +60 °C
Storage temperature range	-40 °C ... +80 °C
Relative air humidity	20 – 90 % RH, not condensing
Vibration resistance	0.7 g acc. to EN 60068-2-6
EMC tests	Class B

Certifications/Standards

Conformity	CE UKCA
------------	------------

Technical data sheet


Interface Technology · LCIS Mechanical Relay

Certifications	cULus (E135145) DNV (TAA000024Y)
Standards	EN 60947-1 EN 60947-5-1 EN 61000-6-2 EN 61000-6-4 UL 508 DNV-CG-0339


Notes and Comments

Comments	Hard gold-plated contacts: So that the gold layer is not damaged, the specified values are not permitted to be exceeded. At higher switching capacity, the gold layer vaporizes. The deposition in the housing can lead to sparkovers between the coil and contact.
----------	---

Dimensions

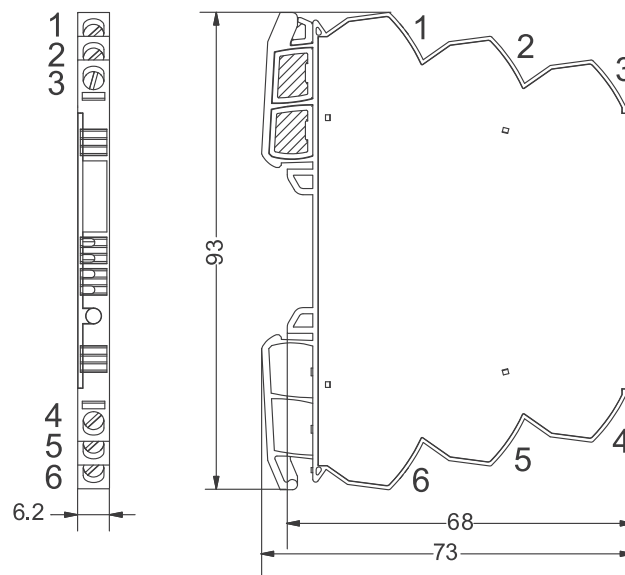

PIN assignment

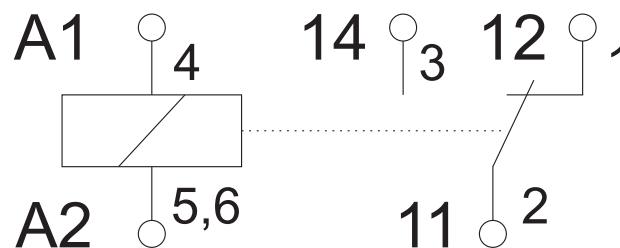

Technical data sheet

Interface Technology · LCIS Mechanical Relay

Use

