



capacitor contactor, AC-6b 12.5 kVA_r, / 400 V, 3-pole, 24 V AC, 50/60 Hz, auxiliary contacts: 2 NC, screw terminal, size: S00

| | |
|--|----------------------------|
| product brand name | SIRIUS |
| product designation | capacitor contactors |
| product type designation | 3RT26 |
| General technical data | |
| size of contactor | S00 |
| product extension auxiliary switch | No |
| power loss [W] for rated value of the current | |
| • at AC in hot operating state per pole | 1.24 W |
| • without load current share typical | 2 W |
| type of calculation of power loss depending on pole | quadratic |
| insulation voltage | |
| • of main circuit with degree of pollution 3 rated value | 690 V |
| • of auxiliary circuit with degree of pollution 3 rated value | 690 V |
| surge voltage resistance | |
| • of main circuit rated value | 6 kV |
| • of auxiliary circuit rated value | 6 kV |
| maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1 | 400 V |
| shock resistance at rectangular impulse | |
| • at AC | 6,7g / 5 ms, 4,2g / 10 ms |
| shock resistance with sine pulse | |
| • at AC | 10,5g / 5 ms, 6,6g / 10 ms |
| mechanical service life (operating cycles) | |
| • of the contactor with added auxiliary switch block typical | 3 000 000 |
| electrical endurance (operating cycles) | 300 000 |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibitance (Date) | 05/01/2014 |
| Weight | 0.355 kg |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| • during operation | -25 ... +60 °C |
| • during storage | -55 ... +80 °C |
| relative humidity minimum | 10 % |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum | 95 % |
| Environmental footprint | |
| Environmental Product Declaration (EPD) | Yes |
| global warming potential [CO ₂ eq] total | 106 kg |
| global warming potential [CO ₂ eq] during manufacturing | 2.47 kg |
| global warming potential [CO ₂ eq] during operation | 104 kg |

| | |
|---|------------------|
| global warming potential [CO2 eq] after end of life | -0.226 kg |
| Main circuit | |
| number of poles for main current circuit | 3 |
| number of NO contacts for main contacts | 3 |
| number of NC contacts for main contacts | 0 |
| operational current at AC-6b at 690 V at ambient temperature 60 °C rated value | 18 A |
| operating reactive power at AC-6b | |
| • at 230 V at 50/60 Hz at ambient temperature 60 °C rated value | 0 ... 7.2 kvar |
| • at 400 V at 50/60 Hz at ambient temperature 60 °C rated value | 0 ... 12.5 kvar |
| • at 500 V at 50/60 Hz at ambient temperature 60 °C rated value | 0 ... 15 kvar |
| • at 690 V at 50/60 Hz at ambient temperature 60 °C rated value | 0 ... 21 kvar |
| no-load switching frequency | |
| • at AC | 500 1/h |
| operating frequency at AC-6b | |
| • at 230 V maximum | 180 1/h |
| • at 240 V maximum | 180 1/h |
| • at 400 V maximum | 180 1/h |
| • at 480 V maximum | 180 1/h |
| • at 500 V maximum | 180 1/h |
| • at 600 V maximum | 180 1/h |
| • at 690 V maximum | 180 1/h |
| Control circuit/ Control | |
| type of voltage | AC |
| type of voltage of the control supply voltage | AC |
| control supply voltage at AC | |
| • at 50 Hz rated value | 24 V |
| • at 60 Hz rated value | 24 V |
| control supply voltage frequency | |
| • 1 rated value | 50 Hz |
| • 2 rated value | 60 Hz |
| operating range factor control supply voltage rated value of magnet coil at AC | |
| • at 50 Hz | 0.8 ... 1.1 |
| • at 60 Hz | 0.85 ... 1.1 |
| apparent pick-up power of magnet coil at AC | 49 VA |
| inductive power factor with closing power of the coil | 0.8 |
| apparent holding power of magnet coil at AC | 7.8 VA |
| inductive power factor with the holding power of the coil | 0.25 |
| closing delay | |
| • at AC | 9 ... 35 ms |
| opening delay | |
| • at AC | 4 ... 15 ms |
| arcing time | 10 ... 15 ms |
| control version of the switch operating mechanism | Standard A1 - A2 |
| residual current of the electronics for control with signal <0> | |
| • at AC at 230 V maximum permissible | 3 mA |
| Auxiliary circuit | |
| number of NC contacts for auxiliary contacts | 2 |
| • attachable | 0 |
| • instantaneous contact | 2 |
| number of NO contacts for auxiliary contacts | 0 |
| • attachable | 0 |
| • instantaneous contact | 0 |
| operational current of auxiliary contacts at AC-12 maximum | 10 A |
| operational current of auxiliary contacts at AC-15 | |
| • at 230 V | 6 A |
| • at 400 V | 3 A |

| | |
|---|--|
| <ul style="list-style-type: none"> • at 690 V | 1 A |
| operational current of auxiliary contacts at DC-13 | |
| <ul style="list-style-type: none"> • at 24 V • at 60 V • at 110 V • at 125 V • at 220 V | 6 A 2 A 1 A 0.9 A 0.3 A |
| contact reliability of auxiliary contacts | 0.00000001 |
| UL/CSA ratings | |
| contact rating of auxiliary contacts according to UL | A600 / Q600 |
| Short-circuit protection | |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V | C characteristic: 10 A; 0.4 kA |
| design of the fuse link | |
| <ul style="list-style-type: none"> • for short-circuit protection of the main circuit with type of coordination 1 required • for short-circuit protection of the auxiliary switch required | gG: 40 A (690 V, 50 kA) gG: 10 A (690 V, 1 kA) |
| Installation/ mounting/ dimensions | |
| mounting position | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| fastening method | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 |
| height | 125 mm |
| width | 45 mm |
| depth | 120 mm |
| required spacing | |
| <ul style="list-style-type: none"> • with side-by-side mounting at the side • for grounded parts at the side | 10 mm 10 mm |
| Connections/ Terminals | |
| type of electrical connection | |
| <ul style="list-style-type: none"> • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil | screw-type terminals screw-type terminals Screw-type terminals Screw-type terminals |
| type of connectable conductor cross-sections for main contacts | |
| <ul style="list-style-type: none"> • solid • stranded • solid or stranded • finely stranded with core end processing | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), 2x 4 mm ² 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), 2x 4 mm ² 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), 2x 4 mm ² 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — solid — solid or stranded — finely stranded with core end processing • for AWG cables for auxiliary contacts | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), 2x 4 mm ² 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), 2x 4 mm ² 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) 2x (20 ... 16), 2x (18 ... 14), 2x 12 |
| type of minimum connectable cross-sections for main contacts at AC-6b | |
| <ul style="list-style-type: none"> • at 40 °C • at 60 °C | 1x 4 mm ² , 2x 2.5 mm ² 2x 4 mm ² |
| AWG number as coded connectable conductor cross section for main contacts | 20 ... 12 |
| Safety related data | |
| product function | |
| <ul style="list-style-type: none"> • mirror contact according to IEC 60947-4-1 • positively driven operation according to IEC 60947-5-1 | No No |
| Electrical Safety | |
| protection class IP on the front according to IEC 60529 | IP20 |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front |
| Approvals Certificates | |
| General Product Approval | EMV |



| | | |
|-------------------|----------------------|-------|
| Test Certificates | Maritime application | other |
|-------------------|----------------------|-------|

[Type Test Certificates/Test Report](#)



[Miscellaneous](#)

| | | |
|-------|-----------------|-------------|
| other | Dangerous goods | Environment |
|-------|-----------------|-------------|



[Confirmation](#)

[Transport Information](#)



[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2617-1AB05>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2617-1AB05>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2617-1AB05>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)





http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2617-1AB05&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2617-1AB05/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2617-1AB05&objecttype=14&gridview=view1>

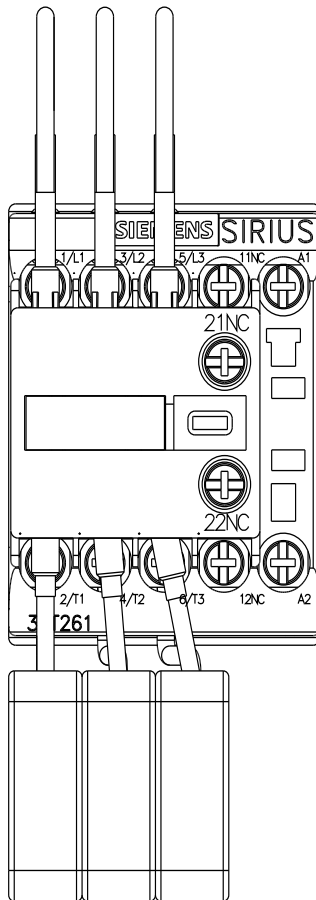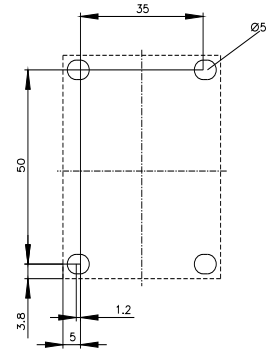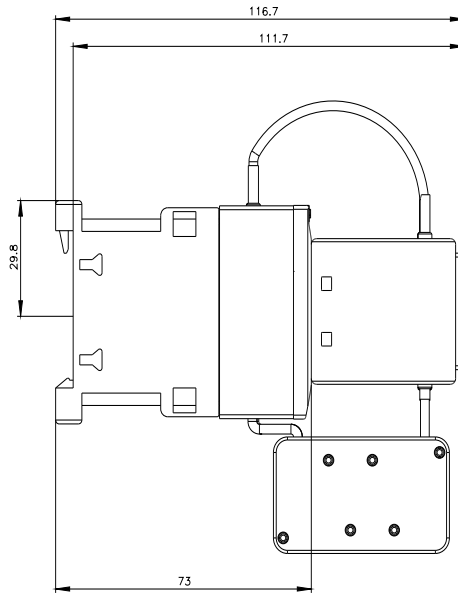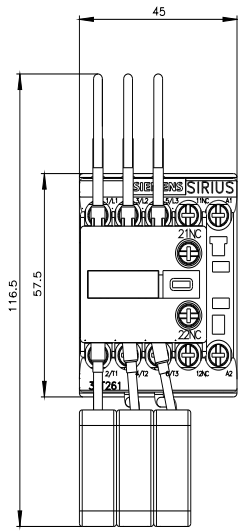

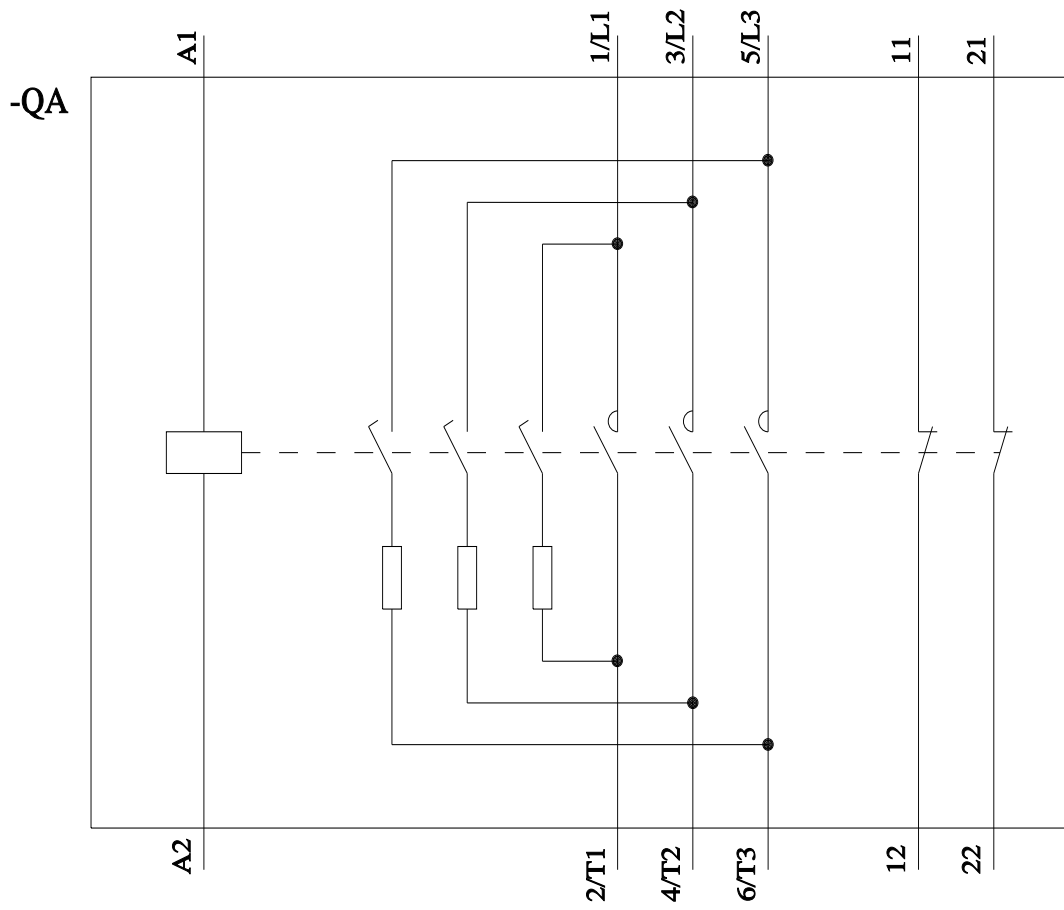

last modified:

9/5/2025 ↻