




locking device made of metal, for activated pushbutton 22 mm, with raised pushbutton,

product brand name		SIRIUS ACT	
product designation		Locking device	
design of the product		for pushbuttons, raised	
product type designation		3SU1	
General technical data			
protection class IP		IP66, IP67, IP69(IP69K)	
Substance Prohibittance (Date)		10/01/2014	
Weight		47 g	
Ambient conditions			
ambient temperature			
• during storage		-40 ... +80 °C	
Environmental footprint			
Environmental Product Declaration(EPD)		Yes	
global warming potential [CO2 eq] total		0.593 kg	
global warming potential [CO2 eq] during manufacturing		0.625 kg	
global warming potential [CO2 eq] during operation		0.235 kg	
global warming potential [CO2 eq] after end of life		-0.267 kg	
Installation/ mounting/ dimensions			
height		43.1 mm	
width		47 mm	
depth		25.1 mm	
Accessories			
material of accessory		Metal	
color of accessory		Silver	
Approvals Certificates			
General Product Ap- proval	Maritime application	other	Environment

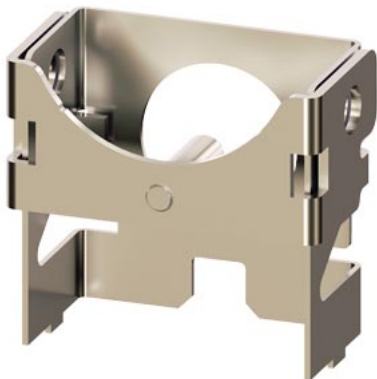

[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1950-0DN80-0AA0>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1950-0DN80-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1950-0DN80-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1950-0DN80-0AA0&lang=en

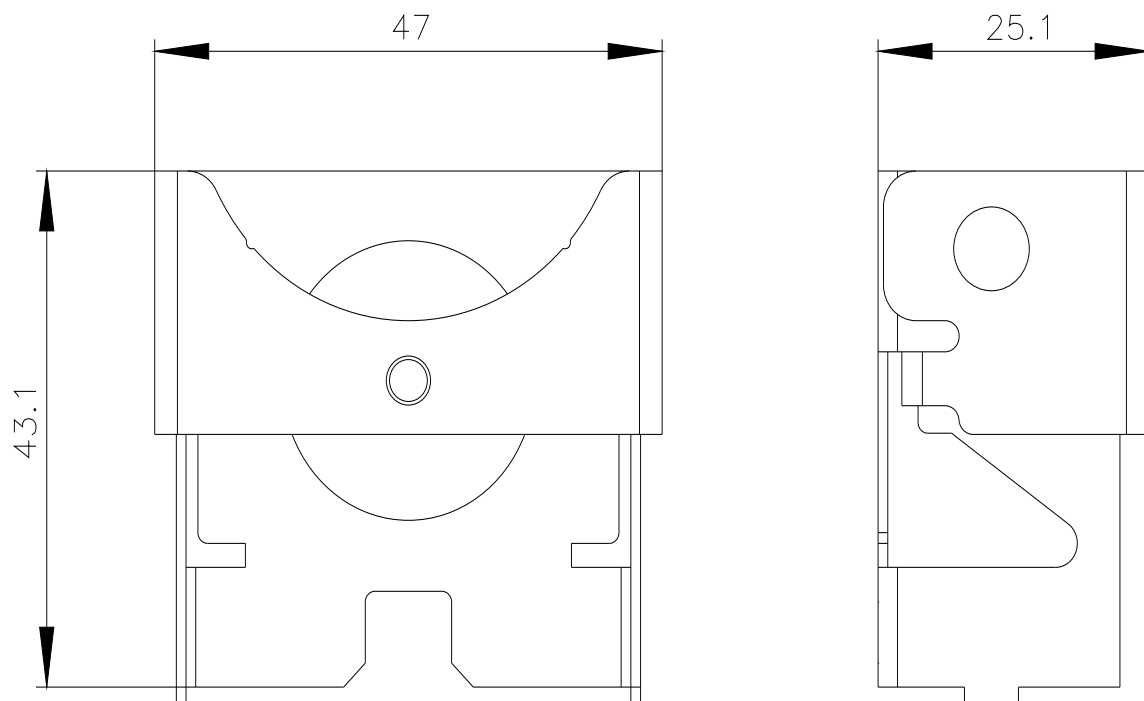

last modified:

4/2/2025 