



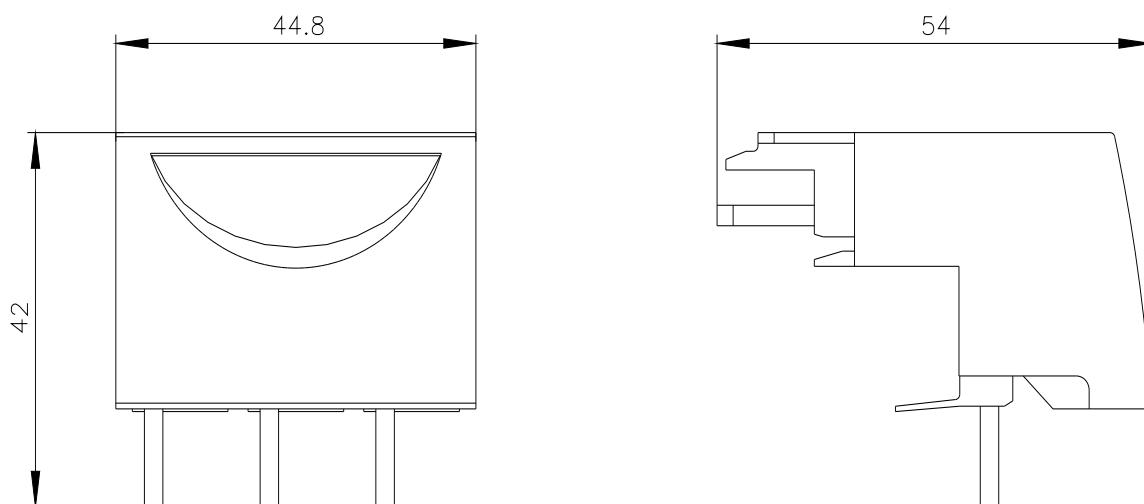
cable connector for circuit breaker size S0 with screw terminal multi-unit packaging  
10 units

product brand name	SIRIUS
product category	Infeed systems
product designation	Connection plug
product type designation	3RV19
suitability for use	circuit-breakers 3RV2
<b>General technical data</b>	
size of the circuit-breaker	S0
power loss [W] for rated value of the current at AC in hot operating state per pole	1.6 W
type of calculation of power loss depending on pole	quadratic
protection class IP on the front according to IEC 60529	IP20
thermal current	32 A
Substance Prohibitance (Date)	07/01/2006
Net Weight	0.039 kg
number of poles for main current circuit	3
operating voltage at AC rated value	690 V
operational current rated value	32 A
<b>UL/CSA ratings</b>	
operating voltage at AC according to UL rated value	600 V
<b>Ambient conditions</b>	
ambient temperature during operation	-20 ... +60 °C
<b>Environmental footprint</b>	
Environmental Product Declaration(EPD)	Yes
global warming potential [CO2 eq] total	9.06 kg
global warming potential [CO2 eq] during manufacturing	0.313 kg
global warming potential [CO2 eq] during operation	8.72 kg
global warming potential [CO2 eq] after end of life	0.022 kg
<b>Electrical Safety</b>	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
<b>Short-circuit protection</b>	
short-circuit rating	see table in the operating instructions
<b>Installation/ mounting/ dimensions</b>	
mounting position	any
fastening method	screw connection in the circuit breaker, pluggable in the infeed system with spring-loaded mechanism
height	42 mm
width	44.8 mm
depth	54 mm

**Connections/ Terminals**

type of electrical connection for main current circuit

screw-type terminals

**Approvals Certificates****General Product Approval****Test Certificates**[Special Test Certificate](#)[Type Test Certificates/Test Report](#)**Maritime application****other****Environment**[Confirmation](#)[Environmental Confirmations](#)**Further information****Information on the packaging**<https://support.industry.siemens.com/cs/ww/en/view/109813875>**Information for data generation and storage**<https://support.industry.siemens.com/cs/ww/en/view/109995012>**Information- and Downloadcenter (Catalogs, Brochures,...)**<https://www.siemens.com/ic10>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV1927-5A>**Cax online generator**<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1927-5A>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3RV1927-5A>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV1927-5A&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1927-5A&lang=en)

---

last modified:

6/30/2025 