


## Data sheet

## 6GK5992-2GA00-8FA0

### product description

#### XR-300 media module

SCALANCE X accessory; Media module MM992-2CUC; 2x 10/100/1000 Mbit/s RJ45 ports, electrical; with securing collar conformal coating.

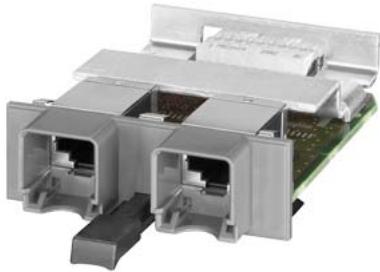

### Technical Product Detail Page

<https://i.siemens.com/1P6GK5992-2GA00-8FA0>

### interfaces

number of electrical/optical connections / for network components or terminal equipment / maximum	2
number of electrical connections	
• for network components or terminal equipment / maximum	2
number of 10/100/1000 Mbit/s RJ45 ports	2
type of electrical connection	
• for network components or terminal equipment	RJ45

### ambient conditions

ambient temperature	
• during operation	-40 ... +70 °C
• during storage	-40 ... +85 °C
• during transport	-40 ... +85 °C
relative humidity / at 25 °C / without condensation / during operation / maximum	95 %
protection class IP	IP20

### design, dimensions and weights

design	Media module with retaining collar
width	60 mm
height	22 mm
depth	100 mm
net weight	0.08 kg
product feature / conformal coating	Yes
fastening method	latched
• installation in media module slot	Yes

### standards, specifications, approvals

standard	
• for FM	FM3611: Class 1, Division 2, Group A, B, C, D / T4, Class 1, Zone 2, Group IIC, T4
• for hazardous zone	EN 60079-0: 2006, EN 60079-15: 2005, II 3 G Ex nA II T4, KEMA 07 ATEX 0145 X
• for safety / from CSA and UL	UL 60950-1, CSA C22.2 No. 60950-1
• for hazardous zone / from CSA and UL	UL 1604 and UL 2279-15 (Hazardous Location), CSA C22.2 No. 213-M1987, Class 1 / Division 2 / Group A, B, C, D / T4, Class 1 / Zone 2 / Group IIC / T4
• for emitted interference	EN 61000-6-4:2007 (Class A)
• for interference immunity	EN 61000-6-2:2005
certificate of suitability	EN 61000-6-2:2005, EN 61000-6-4:2007
• CE marking	Yes

• C-Tick	Yes
• KC approval	Yes
• CCC / for hazardous zone according to GB standard	Yes; GB3836.1, GB3836.8
• CCC / for hazardous zone according to GB standard / as marking	Ex nA IIC T4 Gc
• railway application in accordance with EN 50155	Yes
• railway application in accordance with EN 50121-4	Yes
• fire protection in accordance with EN 45545-2	Yes

MTBF	250 a
------	-------

standards, specifications, approvals / Environmental Product Declaration	
Environmental Product Declaration	Yes
global warming potential [CO2 eq]	
• total	56.15 kg
• during manufacturing	10.1 kg
• during operation	45.95 kg
• after end of life	0.1 kg

further information / internet links	
internet link	<ul style="list-style-type: none"> <li>• to website: Selection guide for cables and connectors</li> <li>• to web page: selection aid TIA Selection Tool</li> <li>• to website: Industrial communication</li> <li>• to web page: SiePortal</li> <li>• to website: Image database</li> <li>• to website: CAx-Download-Manager</li> <li>• to website: Industry Online Support</li> </ul> <a href="https://support.industry.siemens.com/cs/ww/en/view/109766358">https://support.industry.siemens.com/cs/ww/en/view/109766358</a> <a href="https://www.siemens.com/tstcloud">https://www.siemens.com/tstcloud</a> <a href="https://www.siemens.com/simatic-net">https://www.siemens.com/simatic-net</a> <a href="https://sieportal.siemens.com/">https://sieportal.siemens.com/</a> <a href="https://www.automation.siemens.com/bilddb">https://www.automation.siemens.com/bilddb</a> <a href="https://www.siemens.com/cax">https://www.siemens.com/cax</a> <a href="https://support.industry.siemens.com">https://support.industry.siemens.com</a>

security information	
security information	<p>Siemens provides products and solutions with industrial cybersecurity functions that support the secure operation of plants, systems, machines and networks. In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial cybersecurity concept. Siemens' products and solutions constitute one element of such a concept. Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place. For additional information on industrial cybersecurity measures that may be implemented, please visit <a href="http://www.siemens.com/cybersecurity-industry">www.siemens.com/cybersecurity-industry</a>. Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats. To stay informed about product updates, subscribe to the Siemens Industrial Cybersecurity RSS Feed under <a href="https://www.siemens.com/cert. (V4.7)">https://www.siemens.com/cert. (V4.7)</a></p>

Approvals / Certificates	
General Product Approval	



[Declaration of Conformity](#)

[Manufacturer Declaration](#)



[China RoHS](#)

General Product Approval

For use in hazardous locations



FM

[CCC-Ex](#)

Maritime application

Railway

Environment



[Confirmation](#)



---

last modified:

11/14/2025 