



Enclosure for command devices, 22 mm, round, Enclosure material plastic, Enclosure top part yellow, 2 control points plastic, Recess for labels, without equipment

product brand name	SIRIUS ACT
product designation	Enclosures
product type designation	3SU1
<b>Enclosure</b>	
design of the housing	with recess for label
shape of the enclosure front	rectangular
material of the enclosure	plastic
number of command points	2
product component protective collar	No
color of the enclosure top part	yellow
fastening method of the enclosure	Vertical / horizontal
<b>General technical data</b>	
protection class IP	IP66, IP67, IP69(IP69K)
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13
shock resistance for railway applications according to EN 61373	Category 1, Class B
vibration resistance for railway applications according to EN 61373	Category 1, Class B
Substance Prohibition (Date)	10/01/2014
Net Weight	301 g
cable entry type	Metric cable glands 1 x M20 each on the top, bottom and rear, 1 x M16 on the side
<b>Connections/ Terminals</b>	
type of electrical connection on enclosure	Cable routing 1 x M20 each on the top, bottom and rear, 1 x M16 on the side
tightening torque of fixing screws in the enclosure cover	1.5 ... 1.7 N·m
<b>Ambient conditions</b>	
ambient temperature	
• during operation	-25 ... +70 °C
• during storage	-40 ... +80 °C
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted for all devices behind front panel)
<b>Installation/ mounting/ dimensions</b>	
fastening method of modules and accessories	Floor mounting
height	114 mm
width	85 mm
depth	64 mm
mounting diameter	22.3 mm
positive tolerance of installation diameter	0.4 mm

## Approvals Certificates

### Environmental Product Declaration

- |  |            |
|--|------------|
| • global warming potential [CO2 eq] / during manufacturing | 0.566 kg   |
| • global warming potential [CO2 eq] / during operation     | 0.235 kg   |
| • global warming potential [CO2 eq] / after end of life    | -0.0145 kg |
| • global warming potential [CO2 eq] / total                | 0.787 kg   |

### Environment

### General Product Approval

[Environmental Confirmations](#)



Siemens  
EcoTech



### General Product Approval

### Test Certificates

### Maritime application



EG-Konf.



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



LRS

### Maritime application

### other



PRS



RINA

[Confirmation](#)



## Further information

### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1802-0AA00-0AB2>

### Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1802-0AA00-0AB2>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1802-0AA00-0AB2>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1802-0AA00-0AB2&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1802-0AA00-0AB2&lang=en)

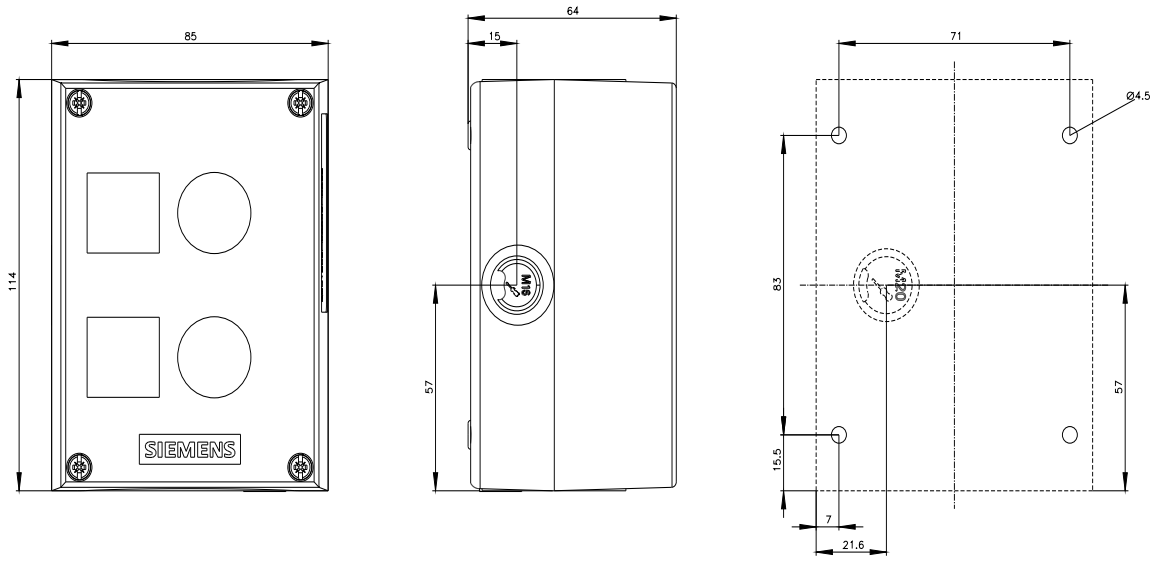

last modified:

4/2/2025 