



power contactor, AC-3e/AC-3 225 A, 110 kW / 400 V AC (50-60 Hz) / DC U<sub>c</sub>: 21-27.3 V PLC input 24 V DC 3-pole, auxiliary contacts 2 NO + 2 NC drive: electronic main circuit: busbar control and auxiliary circuit: screw terminal

|                                                                                                              |                                                                                                                                                                                                                                                     |
|--------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| product brand name                                                                                           | SIRIUS                                                                                                                                                                                                                                              |
| product designation                                                                                          | Power contactor                                                                                                                                                                                                                                     |
| product type designation                                                                                     | 3RT1                                                                                                                                                                                                                                                |
| <b>General technical data</b>                                                                                |                                                                                                                                                                                                                                                     |
| size of contactor                                                                                            | S10                                                                                                                                                                                                                                                 |
| product extension                                                                                            |                                                                                                                                                                                                                                                     |
| • function module for communication                                                                          | No                                                                                                                                                                                                                                                  |
| • auxiliary switch                                                                                           | Yes                                                                                                                                                                                                                                                 |
| power loss [W] for rated value of the current                                                                |                                                                                                                                                                                                                                                     |
| • at AC in hot operating state                                                                               | 51 W                                                                                                                                                                                                                                                |
| • at AC in hot operating state per pole                                                                      | 17 W                                                                                                                                                                                                                                                |
| • without load current share typical                                                                         | 3.4 W                                                                                                                                                                                                                                               |
| type of calculation of power loss current-dependent                                                          | quadratic                                                                                                                                                                                                                                           |
| insulation voltage                                                                                           |                                                                                                                                                                                                                                                     |
| • of main circuit with degree of pollution 3 rated value                                                     | 1 000 V                                                                                                                                                                                                                                             |
| • of auxiliary circuit with degree of pollution 3 rated value                                                | 500 V                                                                                                                                                                                                                                               |
| surge voltage resistance                                                                                     |                                                                                                                                                                                                                                                     |
| • of main circuit rated value                                                                                | 8 kV                                                                                                                                                                                                                                                |
| • of auxiliary circuit rated value                                                                           | 6 kV                                                                                                                                                                                                                                                |
| maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1 | 690 V                                                                                                                                                                                                                                               |
| shock resistance at rectangular impulse                                                                      |                                                                                                                                                                                                                                                     |
| • at AC                                                                                                      | 8,5 g / 5 ms, 4,2 g / 10 ms                                                                                                                                                                                                                         |
| • at DC                                                                                                      | 8,5 g / 5 ms, 4,2 g / 10 ms                                                                                                                                                                                                                         |
| shock resistance with sine pulse                                                                             |                                                                                                                                                                                                                                                     |
| • at AC                                                                                                      | 13,4 g / 5 ms, 6,5 g / 10 ms                                                                                                                                                                                                                        |
| • at DC                                                                                                      | 13,4 g / 5 ms, 6,5 g / 10 ms                                                                                                                                                                                                                        |
| mechanical service life (operating cycles)                                                                   |                                                                                                                                                                                                                                                     |
| • of contactor typical                                                                                       | 10 000 000                                                                                                                                                                                                                                          |
| • of the contactor with added electronically optimized auxiliary switch block typical                        | 5 000 000                                                                                                                                                                                                                                           |
| • of the contactor with added auxiliary switch block typical                                                 | 10 000 000                                                                                                                                                                                                                                          |
| reference code according to IEC 81346-2                                                                      | Q                                                                                                                                                                                                                                                   |
| Substance Prohibitance (day/month/year)                                                                      | 05/01/2012                                                                                                                                                                                                                                          |
| SVHC substance name                                                                                          | Lead CAS-No. 7439-92-1<br>Lead monoxide (lead oxide) CAS-No. 1317-36-8<br>2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one CAS-No. 71868-10-5<br>Melamine CAS-No. 108-78-1<br>6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol CAS-No. 119-47-1 |
| Net Weight                                                                                                   | 6.44 kg                                                                                                                                                                                                                                             |

| Ambient conditions                                                     |                |
|------------------------------------------------------------------------|----------------|
| installation altitude at height above sea level maximum                | 2 000 m        |
| <b>ambient temperature</b>                                             |                |
| • during operation                                                     | -25 ... +60 °C |
| • during storage                                                       | -55 ... +80 °C |
| <b>relative humidity minimum</b>                                       | 10 %           |
| <b>relative humidity at 55 °C according to IEC 60068-2-30 maximum</b>  | 95 %           |
| Main circuit                                                           |                |
| <b>number of poles for main current circuit</b>                        | 3              |
| <b>number of NO contacts for main contacts</b>                         | 3              |
| <b>number of NC contacts for main contacts</b>                         | 0              |
| <b>operating voltage</b>                                               |                |
| • at AC-3 rated value maximum                                          | 1 000 V        |
| • at AC-3e rated value maximum                                         | 1 000 V        |
| <b>operational current</b>                                             |                |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value            | 275 A          |
| • at AC-1                                                              |                |
| — up to 690 V at ambient temperature 40 °C rated value                 | 275 A          |
| — up to 690 V at ambient temperature 60 °C rated value                 | 250 A          |
| — up to 1000 V at ambient temperature 40 °C rated value                | 100 A          |
| — up to 1000 V at ambient temperature 60 °C rated value                | 100 A          |
| • at AC-3                                                              |                |
| — at 400 V rated value                                                 | 225 A          |
| — at 500 V rated value                                                 | 225 A          |
| — at 690 V rated value                                                 | 225 A          |
| — at 1000 V rated value                                                | 68 A           |
| • at AC-3e                                                             |                |
| — at 400 V rated value                                                 | 225 A          |
| — at 500 V rated value                                                 | 225 A          |
| — at 690 V rated value                                                 | 225 A          |
| — at 1000 V rated value                                                | 68 A           |
| • at AC-4 at 400 V rated value                                         | 195 A          |
| • at AC-5a up to 690 V rated value                                     | 242 A          |
| • at AC-5b up to 400 V rated value                                     | 186 A          |
| • at AC-6a                                                             |                |
| — up to 230 V for current peak value n=20 rated value                  | 225 A          |
| — up to 400 V for current peak value n=20 rated value                  | 225 A          |
| — up to 500 V for current peak value n=20 rated value                  | 225 A          |
| — up to 690 V for current peak value n=20 rated value                  | 225 A          |
| — up to 1000 V for current peak value n=20 rated value                 | 68 A           |
| • at AC-6a                                                             |                |
| — up to 230 V for current peak value n=30 rated value                  | 172 A          |
| — up to 400 V for current peak value n=30 rated value                  | 172 A          |
| — up to 500 V for current peak value n=30 rated value                  | 172 A          |
| — up to 690 V for current peak value n=30 rated value                  | 172 A          |
| — up to 1000 V for current peak value n=30 rated value                 | 68 A           |
| minimum cross-section in main circuit at maximum AC-1 rated value      | 150 mm²        |
| <b>operational current for approx. 200000 operating cycles at AC-4</b> |                |
| • at 400 V rated value                                                 | 96 A           |
| • at 690 V rated value                                                 | 85 A           |
| <b>operational current</b>                                             |                |
| • at 1 current path at DC-1                                            |                |

|                                                                    |        |
|--------------------------------------------------------------------|--------|
| — at 24 V rated value                                              | 200 A  |
| — at 60 V rated value                                              | 200 A  |
| — at 110 V rated value                                             | 18 A   |
| — at 220 V rated value                                             | 3.4 A  |
| — at 440 V rated value                                             | 0.8 A  |
| — at 600 V rated value                                             | 0.5 A  |
| ● with 2 current paths in series at DC-1                           |        |
| — at 24 V rated value                                              | 200 A  |
| — at 60 V rated value                                              | 200 A  |
| — at 110 V rated value                                             | 200 A  |
| — at 220 V rated value                                             | 20 A   |
| — at 440 V rated value                                             | 3.2 A  |
| — at 600 V rated value                                             | 1.6 A  |
| ● with 3 current paths in series at DC-1                           |        |
| — at 24 V rated value                                              | 200 A  |
| — at 60 V rated value                                              | 200 A  |
| — at 110 V rated value                                             | 200 A  |
| — at 220 V rated value                                             | 200 A  |
| — at 440 V rated value                                             | 11 A   |
| — at 600 V rated value                                             | 4 A    |
| ● at 1 current path at DC-3 at DC-5                                |        |
| — at 24 V rated value                                              | 200 A  |
| — at 60 V rated value                                              | 7.5 A  |
| — at 220 V rated value                                             | 0.6 A  |
| — at 440 V rated value                                             | 0.17 A |
| — at 600 V rated value                                             | 0.12 A |
| ● with 2 current paths in series at DC-3 at DC-5                   |        |
| — at 24 V rated value                                              | 200 A  |
| — at 60 V rated value                                              | 200 A  |
| — at 110 V rated value                                             | 200 A  |
| — at 220 V rated value                                             | 2.5 A  |
| — at 440 V rated value                                             | 0.65 A |
| — at 600 V rated value                                             | 0.37 A |
| ● with 3 current paths in series at DC-3 at DC-5                   |        |
| — at 24 V rated value                                              | 200 A  |
| — at 60 V rated value                                              | 200 A  |
| — at 110 V rated value                                             | 200 A  |
| — at 220 V rated value                                             | 200 A  |
| — at 440 V rated value                                             | 1.4 A  |
| — at 600 V rated value                                             | 0.75 A |
| <b>operating power</b>                                             |        |
| ● at AC-3                                                          |        |
| — at 230 V rated value                                             | 55 kW  |
| — at 400 V rated value                                             | 110 kW |
| — at 500 V rated value                                             | 160 kW |
| — at 690 V rated value                                             | 200 kW |
| — at 1000 V rated value                                            | 90 kW  |
| ● at AC-3e                                                         |        |
| — at 230 V rated value                                             | 55 kW  |
| — at 400 V rated value                                             | 110 kW |
| — at 500 V rated value                                             | 160 kW |
| — at 690 V rated value                                             | 200 kW |
| — at 1000 V rated value                                            | 90 kW  |
| <b>operating power for approx. 200000 operating cycles at AC-4</b> |        |
| ● at 400 V rated value                                             | 54 kW  |
| ● at 690 V rated value                                             | 82 kW  |
| <b>operating apparent power at AC-6a</b>                           |        |
| ● up to 230 V for current peak value n=20 rated value              | 90 kVA |

|                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• up to 400 V for current peak value n=20 rated value</li> <li>• up to 500 V for current peak value n=20 rated value</li> <li>• up to 690 V for current peak value n=20 rated value</li> <li>• up to 1000 V for current peak value n=20 rated value</li> </ul>                                                                                                                           | 150 kVA<br>190 kVA<br>260 kVA<br>110 kVA                                                                                                                                                                                                                                                                                |
| <b>operating apparent power at AC-6a</b> <ul style="list-style-type: none"> <li>• up to 230 V for current peak value n=30 rated value</li> <li>• up to 400 V for current peak value n=30 rated value</li> <li>• up to 500 V for current peak value n=30 rated value</li> <li>• up to 690 V for current peak value n=30 rated value</li> <li>• up to 1000 V for current peak value n=30 rated value</li> </ul>                   | 60 kVA<br>110 kVA<br>140 kVA<br>200 kVA<br>110 kVA                                                                                                                                                                                                                                                                      |
| <b>short-time withstand current in cold operating state up to 40 °C</b> <ul style="list-style-type: none"> <li>• limited to 1 s switching at zero current maximum</li> <li>• limited to 5 s switching at zero current maximum</li> <li>• limited to 10 s switching at zero current maximum</li> <li>• limited to 30 s switching at zero current maximum</li> <li>• limited to 60 s switching at zero current maximum</li> </ul> | 4 000 A; Use minimum cross-section acc. to AC-1 rated value<br>2 807 A; Use minimum cross-section acc. to AC-1 rated value<br>2 082 A; Use minimum cross-section acc. to AC-1 rated value<br>1 397 A; Use minimum cross-section acc. to AC-1 rated value<br>1 144 A; Use minimum cross-section acc. to AC-1 rated value |
| <b>no-load switching frequency</b> <ul style="list-style-type: none"> <li>• at AC</li> <li>• at DC</li> </ul>                                                                                                                                                                                                                                                                                                                   | 1 000 1/h<br>1 000 1/h                                                                                                                                                                                                                                                                                                  |
| <b>operating frequency</b> <ul style="list-style-type: none"> <li>• at AC-1 maximum</li> <li>• at AC-2 maximum</li> <li>• at AC-3 maximum</li> <li>• at AC-3e <ul style="list-style-type: none"> <li>— maximum</li> </ul> </li> <li>• at AC-4 maximum</li> </ul>                                                                                                                                                                | 750 1/h<br>250 1/h<br>500 1/h<br>500 1/h<br>130 1/h                                                                                                                                                                                                                                                                     |
| <b>Control circuit/ Control</b>                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                         |
| <b>type of voltage of the control supply voltage</b>                                                                                                                                                                                                                                                                                                                                                                            | AC/DC                                                                                                                                                                                                                                                                                                                   |
| <b>control supply voltage at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> <li>• at 60 Hz rated value</li> </ul>                                                                                                                                                                                                                                                                                    | 21 ... 27.3 V<br>21 ... 27.3 V                                                                                                                                                                                                                                                                                          |
| <b>control supply voltage at DC rated value</b>                                                                                                                                                                                                                                                                                                                                                                                 | 21 ... 27.3 V                                                                                                                                                                                                                                                                                                           |
| <b>operating range factor control supply voltage rated value of magnet coil at DC</b> <ul style="list-style-type: none"> <li>• initial value</li> <li>• full-scale value</li> </ul>                                                                                                                                                                                                                                             | 0.8<br>1.1                                                                                                                                                                                                                                                                                                              |
| <b>operating range factor control supply voltage rated value of magnet coil at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>                                                                                                                                                                                                                                                          | 0.8 ... 1.1<br>0.8 ... 1.1                                                                                                                                                                                                                                                                                              |
| <b>type of PLC-control input according to IEC 60947-1</b>                                                                                                                                                                                                                                                                                                                                                                       | Type 2                                                                                                                                                                                                                                                                                                                  |
| <b>consumed current at PLC-control input according to IEC 60947-1 maximum</b>                                                                                                                                                                                                                                                                                                                                                   | 20 mA                                                                                                                                                                                                                                                                                                                   |
| <b>voltage at PLC-control input rated value</b>                                                                                                                                                                                                                                                                                                                                                                                 | 24 V                                                                                                                                                                                                                                                                                                                    |
| <b>operating range factor of the voltage at PLC-control input</b>                                                                                                                                                                                                                                                                                                                                                               | 0.8 ... 1.1                                                                                                                                                                                                                                                                                                             |
| <b>design of the surge suppressor</b>                                                                                                                                                                                                                                                                                                                                                                                           | with varistor                                                                                                                                                                                                                                                                                                           |
| <b>apparent pick-up power</b> <ul style="list-style-type: none"> <li>• at minimum rated control supply voltage at AC <ul style="list-style-type: none"> <li>— at 50 Hz</li> <li>— at 60 Hz</li> </ul> </li> <li>• at maximum rated control supply voltage at AC <ul style="list-style-type: none"> <li>— at 60 Hz</li> <li>— at 50 Hz</li> </ul> </li> </ul>                                                                    | 400 VA<br>400 VA<br>530 VA<br>530 VA                                                                                                                                                                                                                                                                                    |
| <b>apparent pick-up power of magnet coil at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>                                                                                                                                                                                                                                                                                             | 530 VA<br>530 VA                                                                                                                                                                                                                                                                                                        |
| <b>inductive power factor with closing power of the coil</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>                                                                                                                                                                                                                                                                                   | 0.8<br>0.8                                                                                                                                                                                                                                                                                                              |

|                                                                    |                                                 |
|--------------------------------------------------------------------|-------------------------------------------------|
| <b>apparent holding power</b>                                      |                                                 |
| • at minimum rated control supply voltage at DC                    | 2.8 VA                                          |
| • at maximum rated control supply voltage at DC                    | 3.4 VA                                          |
| <b>apparent holding power</b>                                      |                                                 |
| • at minimum rated control supply voltage at AC                    |                                                 |
| — at 50 Hz                                                         | 5.5 VA                                          |
| — at 60 Hz                                                         | 5.5 VA                                          |
| • at maximum rated control supply voltage at AC                    |                                                 |
| — at 50 Hz                                                         | 8.5 VA                                          |
| — at 60 Hz                                                         | 8.5 VA                                          |
| <b>inductive power factor with the holding power of the coil</b>   |                                                 |
| • at 50 Hz                                                         | 0.5                                             |
| • at 60 Hz                                                         | 0.4                                             |
| <b>closing power of magnet coil at DC</b>                          | 580 W                                           |
| <b>holding power of magnet coil at DC</b>                          | 3.4 W                                           |
| <b>closing delay</b>                                               |                                                 |
| • at AC                                                            | 45 ... 80 ms                                    |
| • at DC                                                            | 45 ... 80 ms                                    |
| <b>opening delay</b>                                               |                                                 |
| • at AC                                                            | 80 ... 100 ms                                   |
| • at DC                                                            | 80 ... 100 ms                                   |
| <b>arcing time</b>                                                 | 10 ... 15 ms                                    |
| <b>control version of the switch operating mechanism</b>           | PLC-IN or Standard A1 - A2 (adjustable)         |
| <b>Auxiliary circuit</b>                                           |                                                 |
| number of NC contacts for auxiliary contacts instantaneous contact | 2                                               |
| number of NO contacts for auxiliary contacts instantaneous contact | 2                                               |
| operational current at AC-12 maximum                               | 10 A                                            |
| <b>operational current at AC-15</b>                                |                                                 |
| • at 230 V rated value                                             | 6 A                                             |
| • at 400 V rated value                                             | 3 A                                             |
| • at 500 V rated value                                             | 2 A                                             |
| • at 690 V rated value                                             | 1 A                                             |
| <b>operational current at DC-12</b>                                |                                                 |
| • at 24 V rated value                                              | 10 A                                            |
| • at 48 V rated value                                              | 6 A                                             |
| • at 60 V rated value                                              | 6 A                                             |
| • at 110 V rated value                                             | 3 A                                             |
| • at 125 V rated value                                             | 2 A                                             |
| • at 220 V rated value                                             | 1 A                                             |
| • at 600 V rated value                                             | 0.15 A                                          |
| <b>operational current at DC-13</b>                                |                                                 |
| • at 24 V rated value                                              | 10 A                                            |
| • at 48 V rated value                                              | 2 A                                             |
| • at 60 V rated value                                              | 2 A                                             |
| • at 110 V rated value                                             | 1 A                                             |
| • at 125 V rated value                                             | 0.9 A                                           |
| • at 220 V rated value                                             | 0.3 A                                           |
| • at 600 V rated value                                             | 0.1 A                                           |
| <b>contact reliability of auxiliary contacts</b>                   | 1 faulty switching per 100 million (17 V, 1 mA) |
| <b>UL/CSA ratings</b>                                              |                                                 |
| <b>full-load current (FLA) for 3-phase AC motor</b>                |                                                 |
| • at 480 V rated value                                             | 180 A                                           |
| • at 600 V rated value                                             | 192 A                                           |
| <b>yielded mechanical performance [hp]</b>                         |                                                 |
| • for 3-phase AC motor                                             |                                                 |
| — at 200/208 V rated value                                         | 60 hp                                           |
| — at 220/230 V rated value                                         | 75 hp                                           |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| — at 460/480 V rated value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 150 hp                                                                                                                                                                                                                                 |
| — at 575/600 V rated value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 200 hp                                                                                                                                                                                                                                 |
| <b>contact rating of auxiliary contacts according to UL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                             | A600 / Q600                                                                                                                                                                                                                            |
| <b>Short-circuit protection</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                        |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V                                                                                                                                                                                                                                                                                                                                                                                                               | C characteristic: 10 A; 0.4 kA                                                                                                                                                                                                         |
| <b>design of the fuse link</b> <ul style="list-style-type: none"> <li>for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>with type of coordination 1 required</li> <li>with type of coordination 2 required</li> </ul> </li> <li>for short-circuit protection of the auxiliary switch required</li> </ul>                                                                                                                                                                          | gG: 500 A (690 V, 100 kA)<br>gG: 400 A (690 V, 100 kA), aM: 315 A (690 V, 50 kA), BS88: 400 A (415 V, 50 kA)<br>gG: 10 A (500 V, 1 kA)                                                                                                 |
| <b>Installation/ mounting/ dimensions</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                        |
| <b>mounting position</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back                                                                                                               |
| fastening method side-by-side mounting                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Yes                                                                                                                                                                                                                                    |
| <b>fastening method</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | screw fixing                                                                                                                                                                                                                           |
| <b>height</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 210 mm                                                                                                                                                                                                                                 |
| <b>width</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 145 mm                                                                                                                                                                                                                                 |
| <b>depth</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 202 mm                                                                                                                                                                                                                                 |
| <b>required spacing</b> <ul style="list-style-type: none"> <li>with side-by-side mounting <ul style="list-style-type: none"> <li>forwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> </li> <li>for grounded parts <ul style="list-style-type: none"> <li>forwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> </ul> </li> <li>for live parts <ul style="list-style-type: none"> <li>forwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> </li> </ul> | 20 mm<br>10 mm<br>10 mm<br>0 mm<br><br>20 mm<br>10 mm<br>10 mm<br>10 mm<br><br>20 mm<br>10 mm<br>10 mm<br>10 mm                                                                                                                        |
| <b>Connections/ Terminals</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                        |
| <b>type of electrical connection</b> <ul style="list-style-type: none"> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul>                                                                                                                                                                                                                                                                                         | Connection bar<br>screw-type terminals<br>Screw-type terminals<br>Screw-type terminals                                                                                                                                                 |
| <b>width of connection bar</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 25 mm                                                                                                                                                                                                                                  |
| <b>thickness of connection bar</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 6 mm                                                                                                                                                                                                                                   |
| <b>diameter of holes</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 11 mm                                                                                                                                                                                                                                  |
| <b>number of holes</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1                                                                                                                                                                                                                                      |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>for AWG cables for main contacts</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                  | 2/0 ... 500 kcmil                                                                                                                                                                                                                      |
| <b>connectable conductor cross-section for main contacts</b> <ul style="list-style-type: none"> <li>stranded</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                 | 70 ... 240 mm²                                                                                                                                                                                                                         |
| <b>connectable conductor cross-section for auxiliary contacts</b> <ul style="list-style-type: none"> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul>                                                                                                                                                                                                                                                                                                                                 | 0.5 ... 4 mm²<br>0.5 ... 2.5 mm²                                                                                                                                                                                                       |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>for auxiliary contacts <ul style="list-style-type: none"> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>for AWG cables for auxiliary contacts</li> </ul>                                                                                                                                                                                                       | 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (0.75 ... 4 mm²)<br>2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (0.75 ... 4 mm²)<br>2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)<br>2x (20 ... 16), 2x (18 ... 14), 1x 12 |
| <b>AWG number as coded connectable conductor cross</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 18 ... 14                                                                                                                                                                                                                              |

|                                                               |                                                                          |
|---------------------------------------------------------------|--------------------------------------------------------------------------|
| section for auxiliary contacts                                |                                                                          |
| Safety related data                                           |                                                                          |
| product function                                              |                                                                          |
| • mirror contact according to IEC 60947-4-1                   | Yes                                                                      |
| • positively driven operation according to IEC 60947-5-1      | No                                                                       |
| • suitable for safety function                                | Yes                                                                      |
| suitability for use safety-related switching OFF              | Yes; safety-related disconnection via A1 A2                              |
| service life maximum                                          | 20 a                                                                     |
| test wear-related service life necessary                      | Yes                                                                      |
| proportion of dangerous failures                              |                                                                          |
| • with low demand rate according to SN 31920                  | 40 %                                                                     |
| • with high demand rate according to SN 31920                 | 73 %                                                                     |
| B10 value with high demand rate according to SN 31920         | 1 000 000                                                                |
| failure rate [FIT] with low demand rate according to SN 31920 | 100 FIT                                                                  |
| ISO 13849                                                     |                                                                          |
| device type according to ISO 13849-1                          | 3                                                                        |
| overdimensioning according to ISO 13849-2 necessary           | Yes                                                                      |
| IEC 61508                                                     |                                                                          |
| safety device type according to IEC 61508-2                   | Type A                                                                   |
| Electrical Safety                                             |                                                                          |
| protection class IP on the front according to IEC 60529       | IP00; IP20 with box terminal/cover                                       |
| touch protection on the front according to IEC 60529          | finger-safe, for vertical contact from the front with box terminal/cover |
| Approvals Certificates                                        |                                                                          |
| Environment                                                   | General Product Approval                                                 |

[Environmental Confirmations](#)



|                                                                                                 |                                                                                     |                                                                                            |                                              |                                          |                                                    |
|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|----------------------------------------------|------------------------------------------|----------------------------------------------------|
| General Product Approval                                                                        | EMV                                                                                 | Functional Safety                                                                          | Test Certificates                            |                                          |                                                    |
| <br>EG-Konf. |  | <br>RCM | <a href="#">Type Examination Certificate</a> | <a href="#">Special Test Certificate</a> | <a href="#">Type Test Certificates/Test Report</a> |

|                                                                                     |                                                                                     |                               |                               |                              |                              |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------|-------------------------------|------------------------------|------------------------------|
| Maritime application                                                                | other                                                                               |                               |                               |                              |                              |
|  |  | <a href="#">Miscellaneous</a> | <a href="#">Miscellaneous</a> | <a href="#">Confirmation</a> | <a href="#">Confirmation</a> |

|                                                                                     |                               |                                          |  |  |  |
|-------------------------------------------------------------------------------------|-------------------------------|------------------------------------------|--|--|--|
| other                                                                               | Railway                       |                                          |  |  |  |
|  | <a href="#">Miscellaneous</a> | <a href="#">Special Test Certificate</a> |  |  |  |

|                                                                                                                                                                               |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Further information                                                                                                                                                           |  |
| Information on the packaging                                                                                                                                                  |  |
| <a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a>                                       |  |
| Information for data generation and storage                                                                                                                                   |  |
| <a href="https://support.industry.siemens.com/cs/ww/en/view/109995012">https://support.industry.siemens.com/cs/ww/en/view/109995012</a>                                       |  |
| Information- and Downloadcenter (Catalogs, Brochures,...)                                                                                                                     |  |
| <a href="https://www.siemens.com/ic10">https://www.siemens.com/ic10</a>                                                                                                       |  |
| Industry Mall (Online ordering system)                                                                                                                                        |  |
| <a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1064-6NB36">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1064-6NB36</a> |  |

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1064-6NB36>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT1064-6NB36&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1064-6NB36&lang=en)


Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1064-6NB36>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>)

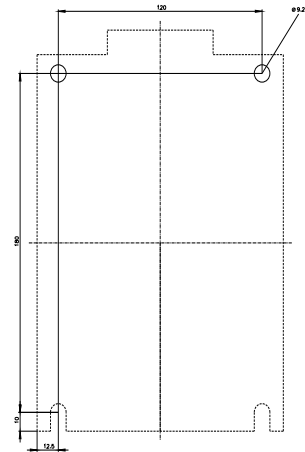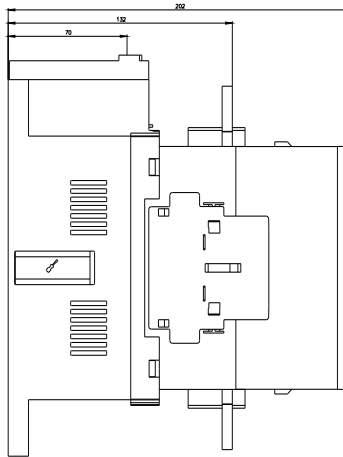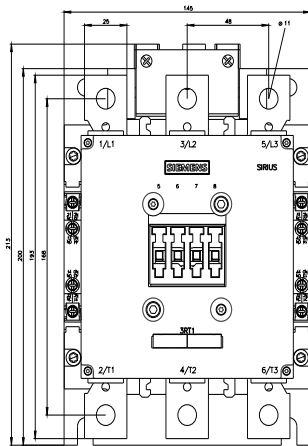

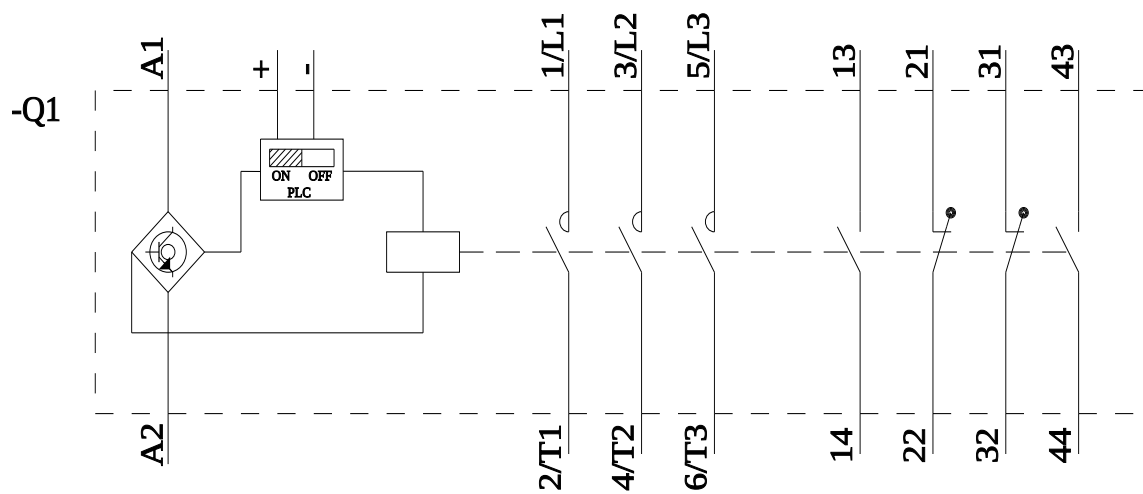

last modified:

4/4/2026 