



vacuum contactor AC-3e/AC-3 500 A, 250 kW / 400 V, 3-pole,  $U_c$ : 110-127 V  
AC(50-60 Hz) / DC drive: conventional auxiliary contacts 2 NO + 2 NC main circuit:  
busbar control and auxiliary circuit: screw terminal

|                                                                                                              |                              |
|--------------------------------------------------------------------------------------------------------------|------------------------------|
| product brand name                                                                                           | SIRIUS                       |
| product designation                                                                                          | Power contactor              |
| product type designation                                                                                     | 3RT12                        |
| <b>General technical data</b>                                                                                |                              |
| size of contactor                                                                                            | S12                          |
| product extension                                                                                            |                              |
| • function module for communication                                                                          | No                           |
| • auxiliary switch                                                                                           | Yes                          |
| power loss [W] for rated value of the current                                                                |                              |
| • at AC in hot operating state                                                                               | 96 W                         |
| • at AC in hot operating state per pole                                                                      | 32 W                         |
| • without load current share typical                                                                         | 10 W                         |
| type of calculation of power loss current-dependent                                                          | quadratic                    |
| insulation voltage                                                                                           |                              |
| • of main circuit with degree of pollution 3 rated value                                                     | 1 000 V                      |
| • of auxiliary circuit with degree of pollution 3 rated value                                                | 500 V                        |
| surge voltage resistance                                                                                     |                              |
| • of main circuit rated value                                                                                | 8 kV                         |
| • of auxiliary circuit rated value                                                                           | 6 kV                         |
| maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1 | 690 V                        |
| shock resistance at rectangular impulse                                                                      |                              |
| • at AC                                                                                                      | 8,5 g / 5 ms, 4,2 g / 10 ms  |
| • at DC                                                                                                      | 8,5 g / 5 ms, 4,2 g / 10 ms  |
| shock resistance with sine pulse                                                                             |                              |
| • at AC                                                                                                      | 13,4 g / 5 ms, 6,5 g / 10 ms |
| • at DC                                                                                                      | 13,4 g / 5 ms, 6,5 g / 10 ms |
| mechanical service life (operating cycles)                                                                   |                              |
| • of contactor typical                                                                                       | 10 000 000                   |
| • of the contactor with added electronically optimized auxiliary switch block typical                        | 5 000 000                    |
| • of the contactor with added auxiliary switch block typical                                                 | 10 000 000                   |
| reference code according to IEC 81346-2                                                                      | Q                            |
| Substance Prohibitance (day/month/year)                                                                      | 05/01/2012                   |
| SVHC substance name                                                                                          | Lead CAS-No. 7439-92-1       |
| Net Weight                                                                                                   | 10.6 kg                      |
| <b>Ambient conditions</b>                                                                                    |                              |
| installation altitude at height above sea level maximum                                                      | 2 000 m                      |
| ambient temperature                                                                                          |                              |
| • during operation                                                                                           | -25 ... +60 °C               |

|                                                                        |                |
|------------------------------------------------------------------------|----------------|
| • during storage                                                       | -55 ... +80 °C |
| <b>relative humidity minimum</b>                                       | 10 %           |
| <b>relative humidity at 55 °C according to IEC 60068-2-30 maximum</b>  | 95 %           |
| <b>Main circuit</b>                                                    |                |
| <b>number of poles for main current circuit</b>                        | 3              |
| <b>number of NO contacts for main contacts</b>                         | 3              |
| <b>number of NC contacts for main contacts</b>                         | 0              |
| <b>operating voltage</b>                                               |                |
| • at AC-3 rated value maximum                                          | 1 000 V        |
| • at AC-3e rated value maximum                                         | 1 000 V        |
| <b>operational current</b>                                             |                |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value            | 610 A          |
| • at AC-1                                                              |                |
| — up to 690 V at ambient temperature 40 °C rated value                 | 610 A          |
| — up to 690 V at ambient temperature 60 °C rated value                 | 550 A          |
| • at AC-3                                                              |                |
| — at 400 V rated value                                                 | 500 A          |
| — at 500 V rated value                                                 | 500 A          |
| — at 690 V rated value                                                 | 500 A          |
| • at AC-3e                                                             |                |
| — at 400 V rated value                                                 | 500 A          |
| — at 500 V rated value                                                 | 500 A          |
| — at 690 V rated value                                                 | 500 A          |
| • at AC-4 at 400 V rated value                                         | 430 A          |
| • at AC-6a                                                             |                |
| — up to 230 V for current peak value n=20 rated value                  | 439 A          |
| — up to 400 V for current peak value n=20 rated value                  | 439 A          |
| — up to 500 V for current peak value n=20 rated value                  | 439 A          |
| — up to 690 V for current peak value n=20 rated value                  | 439 A          |
| • at AC-6a                                                             |                |
| — up to 230 V for current peak value n=30 rated value                  | 293 A          |
| — up to 400 V for current peak value n=30 rated value                  | 293 A          |
| — up to 500 V for current peak value n=30 rated value                  | 293 A          |
| — up to 690 V for current peak value n=30 rated value                  | 293 A          |
| minimum cross-section in main circuit at maximum AC-1 rated value      | 370 mm²        |
| <b>operational current for approx. 200000 operating cycles at AC-4</b> |                |
| • at 400 V rated value                                                 | 215 A          |
| • at 690 V rated value                                                 | 215 A          |
| <b>operating power</b>                                                 |                |
| • at AC-3                                                              |                |
| — at 230 V rated value                                                 | 160 kW         |
| — at 400 V rated value                                                 | 250 kW         |
| — at 500 V rated value                                                 | 355 kW         |
| — at 690 V rated value                                                 | 500 kW         |
| • at AC-3e                                                             |                |
| — at 230 V rated value                                                 | 160 kW         |
| — at 400 V rated value                                                 | 250 kW         |
| — at 500 V rated value                                                 | 355 kW         |
| — at 690 V rated value                                                 | 500 kW         |
| <b>operating power for approx. 200000 operating cycles at AC-4</b>     |                |
| • at 400 V rated value                                                 | 122 kW         |
| • at 690 V rated value                                                 | 212 kW         |
| <b>operating apparent power at AC-6a</b>                               |                |
| • up to 230 V for current peak value n=20 rated value                  | 170 kVA        |

|                                                                                                                                                                                                                                                                                                                                                                                                               |                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
| <ul style="list-style-type: none"> <li>• up to 400 V for current peak value n=20 rated value</li> <li>• up to 500 V for current peak value n=20 rated value</li> <li>• up to 690 V for current peak value n=20 rated value</li> </ul>                                                                                                                                                                         | 300 kVA<br>380 kVA<br>520 kVA                       |
| <b>operating apparent power at AC-6a</b> <ul style="list-style-type: none"> <li>• up to 230 V for current peak value n=30 rated value</li> <li>• up to 400 V for current peak value n=30 rated value</li> <li>• up to 500 V for current peak value n=30 rated value</li> <li>• up to 690 V for current peak value n=30 rated value</li> <li>• up to 1000 V for current peak value n=30 rated value</li> </ul> | 110 kVA<br>200 kVA<br>250 kVA<br>350 kVA<br>500 kVA |
| <b>no-load switching frequency</b> <ul style="list-style-type: none"> <li>• at AC</li> <li>• at DC</li> </ul>                                                                                                                                                                                                                                                                                                 | 2 000 1/h<br>2 000 1/h                              |
| <b>operating frequency</b> <ul style="list-style-type: none"> <li>• at AC-1 maximum</li> <li>• at AC-2 maximum</li> <li>• at AC-3 maximum</li> <li>• at AC-3e <ul style="list-style-type: none"> <li>— maximum</li> </ul> </li> <li>• at AC-4 maximum</li> </ul>                                                                                                                                              | 700 1/h<br>250 1/h<br>750 1/h<br>750 1/h<br>250 1/h |
| <b>Control circuit/ Control</b>                                                                                                                                                                                                                                                                                                                                                                               |                                                     |
| <b>type of voltage of the control supply voltage</b>                                                                                                                                                                                                                                                                                                                                                          | AC/DC                                               |
| <b>control supply voltage at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> <li>• at 60 Hz rated value</li> </ul>                                                                                                                                                                                                                                                                  | 110 ... 127 V<br>110 ... 127 V                      |
| <b>control supply voltage at DC rated value</b>                                                                                                                                                                                                                                                                                                                                                               | 110 ... 127 V                                       |
| <b>operating range factor control supply voltage rated value of magnet coil at DC</b> <ul style="list-style-type: none"> <li>• initial value</li> <li>• full-scale value</li> </ul>                                                                                                                                                                                                                           | 0.8<br>1.1                                          |
| <b>operating range factor control supply voltage rated value of magnet coil at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>                                                                                                                                                                                                                                        | 0.8 ... 1.1<br>0.8 ... 1.1                          |
| <b>design of the surge suppressor</b>                                                                                                                                                                                                                                                                                                                                                                         | with varistor                                       |
| <b>apparent pick-up power</b> <ul style="list-style-type: none"> <li>• at minimum rated control supply voltage at AC <ul style="list-style-type: none"> <li>— at 50 Hz</li> <li>— at 60 Hz</li> </ul> </li> <li>• at maximum rated control supply voltage at AC <ul style="list-style-type: none"> <li>— at 60 Hz</li> <li>— at 50 Hz</li> </ul> </li> </ul>                                                  | 700 VA<br>700 VA<br>830 VA<br>830 VA                |
| <b>apparent pick-up power of magnet coil at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>                                                                                                                                                                                                                                                                           | 830 VA<br>830 VA                                    |
| <b>inductive power factor with closing power of the coil</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>                                                                                                                                                                                                                                                                 | 0.9<br>0.9                                          |
| <b>apparent holding power</b> <ul style="list-style-type: none"> <li>• at minimum rated control supply voltage at DC</li> <li>• at maximum rated control supply voltage at DC</li> </ul>                                                                                                                                                                                                                      | 8.5 VA<br>10 VA                                     |
| <b>apparent holding power</b> <ul style="list-style-type: none"> <li>• at minimum rated control supply voltage at AC <ul style="list-style-type: none"> <li>— at 50 Hz</li> <li>— at 60 Hz</li> </ul> </li> <li>• at maximum rated control supply voltage at AC <ul style="list-style-type: none"> <li>— at 50 Hz</li> <li>— at 60 Hz</li> </ul> </li> </ul>                                                  | 7.6 VA<br>7.6 VA<br>9.2 VA<br>9.2 VA                |
| <b>inductive power factor with the holding power of the coil</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                                                                                                                                                                                                                                                                                 | 0.9                                                 |

|                                                                                                           |                                                                                |
|-----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| • at 60 Hz                                                                                                | 0.9                                                                            |
| <b>closing power of magnet coil at DC</b>                                                                 | 920 W                                                                          |
| <b>holding power of magnet coil at DC</b>                                                                 | 10 W                                                                           |
| <b>closing delay</b>                                                                                      |                                                                                |
| • at AC                                                                                                   | 45 ... 100 ms                                                                  |
| • at DC                                                                                                   | 45 ... 100 ms                                                                  |
| <b>opening delay</b>                                                                                      |                                                                                |
| • at AC                                                                                                   | 60 ... 100 ms                                                                  |
| • at DC                                                                                                   | 60 ... 100 ms                                                                  |
| <b>arcing time</b>                                                                                        | 10 ... 15 ms                                                                   |
| <b>control version of the switch operating mechanism</b>                                                  | Standard A1 - A2                                                               |
| <b>Auxiliary circuit</b>                                                                                  |                                                                                |
| number of NC contacts for auxiliary contacts instantaneous contact                                        | 2                                                                              |
| number of NO contacts for auxiliary contacts instantaneous contact                                        | 2                                                                              |
| operational current at AC-12 maximum                                                                      | 10 A                                                                           |
| <b>operational current at AC-15</b>                                                                       |                                                                                |
| • at 230 V rated value                                                                                    | 6 A                                                                            |
| • at 400 V rated value                                                                                    | 3 A                                                                            |
| • at 500 V rated value                                                                                    | 2 A                                                                            |
| • at 690 V rated value                                                                                    | 1 A                                                                            |
| <b>operational current at DC-12</b>                                                                       |                                                                                |
| • at 24 V rated value                                                                                     | 10 A                                                                           |
| • at 48 V rated value                                                                                     | 6 A                                                                            |
| • at 60 V rated value                                                                                     | 6 A                                                                            |
| • at 110 V rated value                                                                                    | 3 A                                                                            |
| • at 125 V rated value                                                                                    | 2 A                                                                            |
| • at 220 V rated value                                                                                    | 1 A                                                                            |
| • at 600 V rated value                                                                                    | 0.15 A                                                                         |
| <b>operational current at DC-13</b>                                                                       |                                                                                |
| • at 24 V rated value                                                                                     | 10 A                                                                           |
| • at 48 V rated value                                                                                     | 2 A                                                                            |
| • at 60 V rated value                                                                                     | 2 A                                                                            |
| • at 110 V rated value                                                                                    | 1 A                                                                            |
| • at 125 V rated value                                                                                    | 0.9 A                                                                          |
| • at 220 V rated value                                                                                    | 0.3 A                                                                          |
| • at 600 V rated value                                                                                    | 0.1 A                                                                          |
| <b>contact reliability of auxiliary contacts</b>                                                          | 1 faulty switching per 100 million (17 V, 1 mA)                                |
| <b>UL/CSA ratings</b>                                                                                     |                                                                                |
| <b>full-load current (FLA) for 3-phase AC motor</b>                                                       |                                                                                |
| • at 480 V rated value                                                                                    | 477 A                                                                          |
| • at 600 V rated value                                                                                    | 472 A                                                                          |
| <b>yielded mechanical performance [hp]</b>                                                                |                                                                                |
| • for 3-phase AC motor                                                                                    |                                                                                |
| — at 200/208 V rated value                                                                                | 150 hp                                                                         |
| — at 220/230 V rated value                                                                                | 200 hp                                                                         |
| — at 460/480 V rated value                                                                                | 400 hp                                                                         |
| — at 575/600 V rated value                                                                                | 500 hp                                                                         |
| <b>contact rating of auxiliary contacts according to UL</b>                                               | A600 / Q600                                                                    |
| <b>Short-circuit protection</b>                                                                           |                                                                                |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V | C characteristic: 10 A; 0.4 kA                                                 |
| <b>design of the fuse link</b>                                                                            |                                                                                |
| • for short-circuit protection of the main circuit                                                        |                                                                                |
| — with type of coordination 1 required                                                                    | gG: 800 A (690 V, 100 kA)                                                      |
| — with type of coordination 2 required                                                                    | gG: 800 A (690 V, 50 kA), aM: 630 A (690 V, 50 kA), BS88: 800 A (415 V, 50 kA) |
| • for short-circuit protection of the auxiliary switch required                                           | gG: 10 A (500 V, 1 kA)                                                         |
| <b>Installation/ mounting/ dimensions</b>                                                                 |                                                                                |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>mounting position</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | +/-22,5° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface                                                                                                  |
| <b>fastening method side-by-side mounting</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Yes                                                                                                                                                                                                                                    |
| <b>fastening method</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | screw fixing                                                                                                                                                                                                                           |
| <b>height</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 217 mm                                                                                                                                                                                                                                 |
| <b>width</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 160 mm                                                                                                                                                                                                                                 |
| <b>depth</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 225 mm                                                                                                                                                                                                                                 |
| <b>required spacing</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                        |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | 20 mm<br>10 mm<br>10 mm<br>0 mm<br><br>20 mm<br>10 mm<br>10 mm<br>10 mm<br><br>20 mm<br>10 mm<br>10 mm<br>10 mm                                                                                                                        |
| <b>Connections/ Terminals</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                        |
| <b>type of electrical connection</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                        |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control circuit</li> <li>• at contactor for auxiliary contacts</li> <li>• of magnet coil</li> </ul>                                                                                                                                                                                                                                                                                                                            | Connection bar<br>screw-type terminals<br>Screw-type terminals<br>Screw-type terminals                                                                                                                                                 |
| <b>width of connection bar</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 25 mm                                                                                                                                                                                                                                  |
| <b>thickness of connection bar</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 6 mm                                                                                                                                                                                                                                   |
| <b>diameter of holes</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 11 mm                                                                                                                                                                                                                                  |
| <b>number of holes</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1                                                                                                                                                                                                                                      |
| <b>type of connectable conductor cross-sections</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                        |
| <ul style="list-style-type: none"> <li>• for AWG cables for main contacts</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                          | 2/0 ... 500 kcmil                                                                                                                                                                                                                      |
| <b>connectable conductor cross-section for main contacts</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                        |
| <ul style="list-style-type: none"> <li>• stranded</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 70 ... 240 mm²                                                                                                                                                                                                                         |
| <b>connectable conductor cross-section for auxiliary contacts</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                        |
| <ul style="list-style-type: none"> <li>• solid or stranded</li> <li>• finely stranded with core end processing</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                     | 0.5 ... 4 mm²<br>0.5 ... 2.5 mm²                                                                                                                                                                                                       |
| <b>type of connectable conductor cross-sections</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                        |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• for AWG cables for auxiliary contacts</li> </ul>                                                                                                                                                                                                                                                       | 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (0.75 ... 4 mm²)<br>2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (0.75 ... 4 mm²)<br>2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)<br>2x (20 ... 16), 2x (18 ... 14), 1x 12 |
| <b>AWG number as coded connectable conductor cross section for auxiliary contacts</b>                                                                                                                                                                                                                                                                                                                                                                                                                                         | 18 ... 14                                                                                                                                                                                                                              |
| <b>Safety related data</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                        |
| <b>product function</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                        |
| <ul style="list-style-type: none"> <li>• mirror contact according to IEC 60947-4-1</li> <li>• positively driven operation according to IEC 60947-5-1</li> </ul>                                                                                                                                                                                                                                                                                                                                                               | Yes<br>No                                                                                                                                                                                                                              |
| <b>Electrical Safety</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                        |
| <b>protection class IP on the front according to IEC 60529</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                | IP00; IP20 with box terminal/cover                                                                                                                                                                                                     |
| <b>touch protection on the front according to IEC 60529</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | finger-safe, for vertical contact from the front with box terminal/cover                                                                                                                                                               |
| <b>Approvals Certificates</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                        |
| <b>Environment</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <b>General Product Approval</b>                                                                                                                                                                                                        |

[Environmental Con-  
firmations](#)



|                               |     |                   |                   |                      |
|-------------------------------|-----|-------------------|-------------------|----------------------|
| General Product Ap-<br>proval | EMV | Functional Safety | Test Certificates | Maritime application |
|-------------------------------|-----|-------------------|-------------------|----------------------|



[Type Examination Cer-  
tificate](#)

[Special Test Certific-  
ate](#)

[Type Test Certific-  
ates/Test Report](#)



|                      |       |         |
|----------------------|-------|---------|
| Maritime application | other | Railway |
|----------------------|-------|---------|



[Confirmation](#)

[Miscellaneous](#)

[Confirmation](#)



[Special Test Certific-  
ate](#)

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1276-6AF36>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1276-6AF36>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT1276-6AF36&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1276-6AF36&lang=en)


##### Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1276-6AF36>

##### Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP='HAUPT'></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

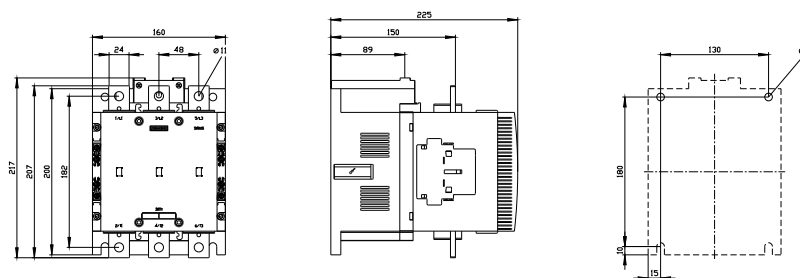

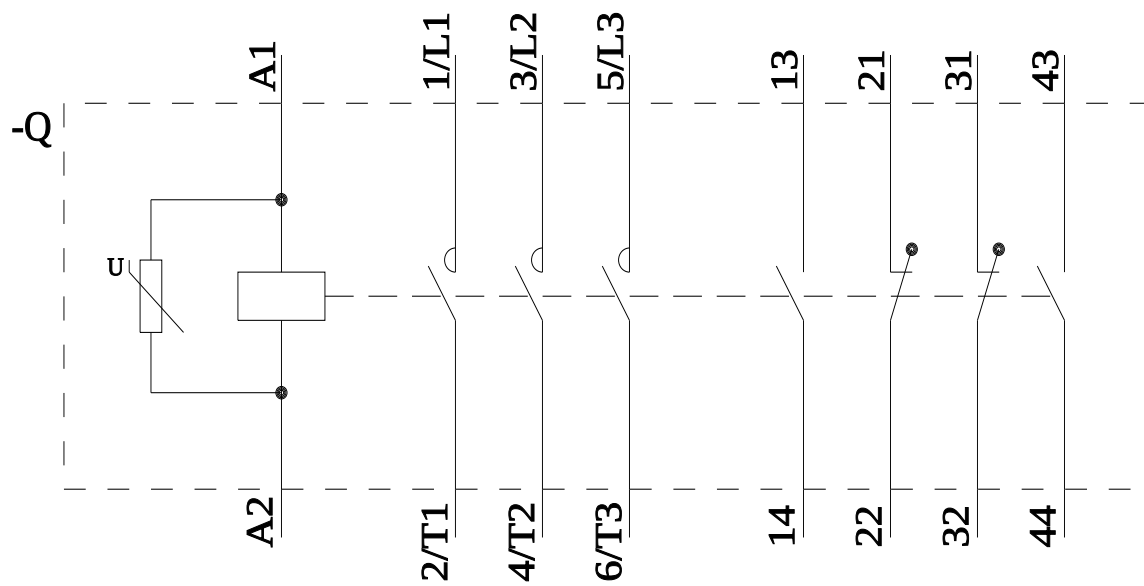

last modified:

4/4/2026