

Siemens  
EcoTech



Special type Circuit breaker size S00 for motor protection, CLASS 10 A-release  
10...16 A N-release 208 A Spring-type terminal Standard switching capacity  
Ambient temperature -50 °C 500 switching cycles

|                                                                                                |                      |
|------------------------------------------------------------------------------------------------|----------------------|
| product brand name                                                                             | SIRIUS               |
| product designation                                                                            | Circuit breaker      |
| design of the product                                                                          | For motor protection |
| product type designation                                                                       | 3RV2                 |
| <b>General technical data</b>                                                                  |                      |
| Product equipment of circuit breaker for motor protection complete unit with protection device | Yes                  |
| size of the circuit-breaker                                                                    | S00                  |
| size of contactor can be combined company-specific                                             | S00, S0              |
| product function disconnecter functionality                                                    | Yes                  |
| product extension auxiliary switch                                                             | Yes                  |
| power loss [W] for rated value of the current                                                  |                      |
| • at AC in hot operating state                                                                 | 9.25 W               |
| • at AC in hot operating state per pole                                                        | 3.1 W                |
| type of calculation of power loss current-dependent                                            | quadratic            |
| insulation voltage with degree of pollution 3 at AC rated value                                | 690 V                |
| surge voltage resistance rated value                                                           | 6 kV                 |
| maximum permissible voltage for protective separation                                          |                      |
| • in networks with ungrounded star point between main and auxiliary circuit                    | 400 V                |
| • in networks with grounded star point between main and auxiliary circuit                      | 400 V                |
| protection class IP                                                                            |                      |
| • on the front according to IEC 60529                                                          | IP20                 |
| • on the front                                                                                 | IP20                 |
| • of the terminal                                                                              | IP20                 |
| shock resistance according to IEC 60068-2-27                                                   | 25g / 11 ms          |
| mechanical service life (operating cycles)                                                     |                      |
| • of the main contacts typical                                                                 | 500                  |
| • of auxiliary contacts typical                                                                | 500                  |
| electrical endurance (operating cycles) typical                                                | 500                  |
| reference code according to IEC 81346-2                                                        | Q                    |
| continuous current rated value                                                                 | 16 A                 |
| Substance Prohibitance (day/month/year)                                                        | 10/01/2009           |
| Net Weight                                                                                     | 0.379 g              |
| <b>Ambient conditions</b>                                                                      |                      |
| installation altitude at height above sea level maximum                                        | 2 000 m              |

|                                                                                                |                |
|------------------------------------------------------------------------------------------------|----------------|
| <b>ambient temperature</b>                                                                     |                |
| • during operation                                                                             | -50 ... +60 °C |
| • during storage                                                                               | -50 ... +80 °C |
| • during transport                                                                             | -50 ... +80 °C |
| <b>temperature compensation</b>                                                                | -20 ... +60 °C |
| relative humidity during operation                                                             | 10 ... 95 %    |
| <b>Main circuit</b>                                                                            |                |
| <b>number of poles for main current circuit</b>                                                | 3              |
| <b>adjustable current response value current of the current-dependent overload release</b>     | 10 ... 16 A    |
| <b>type of voltage for main current circuit</b>                                                | AC             |
| <b>operating voltage</b>                                                                       |                |
| • rated value                                                                                  | 690 V          |
| • rated value                                                                                  | 20 ... 690 V   |
| • at AC-3 rated value maximum                                                                  | 690 V          |
| <b>operating frequency rated value</b>                                                         | 50 ... 60 Hz   |
| <b>operational current rated value</b>                                                         | 16 A           |
| <b>operational current</b>                                                                     |                |
| • at AC-3 at 400 V rated value                                                                 | 16 A           |
| <b>operating power</b>                                                                         |                |
| • at AC-3                                                                                      |                |
| — at 230 V rated value                                                                         | 4 kW           |
| — at 400 V rated value                                                                         | 7.5 kW         |
| — at 500 V rated value                                                                         | 7.5 kW         |
| — at 690 V rated value                                                                         | 11 kW          |
| <b>operating frequency</b>                                                                     |                |
| • at AC-3 maximum                                                                              | 15 1/h         |
| <b>Auxiliary circuit</b>                                                                       |                |
| <b>type of voltage for auxiliary and control circuit</b>                                       | AC/DC          |
| <b>number of NC contacts for auxiliary contacts</b>                                            | 0              |
| <b>number of NO contacts for auxiliary contacts</b>                                            | 0              |
| number of CO contacts for auxiliary contacts                                                   | 0              |
| <b>Protective and monitoring functions</b>                                                     |                |
| <b>product function</b>                                                                        |                |
| • ground fault detection                                                                       | No             |
| • phase failure detection                                                                      | Yes            |
| <b>trip class</b>                                                                              | CLASS 10       |
| <b>design of the overload release</b>                                                          | thermal        |
| <b>protection function thermal overload protection (ANSI 49)</b>                               | Yes            |
| <b>maximum short-circuit current breaking capacity (Icu)</b>                                   |                |
| • at AC at 240 V rated value                                                                   | 100 kA         |
| • at AC at 400 V rated value                                                                   | 55 kA          |
| • at AC at 500 V rated value                                                                   | 10 kA          |
| • at AC at 690 V rated value                                                                   | 4 kA           |
| <b>operating short-circuit current breaking capacity (Ics) at AC</b>                           |                |
| • at 240 V rated value                                                                         | 100 kA         |
| • at 400 V rated value                                                                         | 30 kA          |
| • at 500 V rated value                                                                         | 5 kA           |
| • at 690 V rated value                                                                         | 2 kA           |
| response value current of instantaneous short-circuit trip unit                                | 208 A          |
| <b>Short-circuit protection</b>                                                                |                |
| <b>product function short circuit protection</b>                                               | Yes            |
| <b>design of the short-circuit trip</b>                                                        | magnetic       |
| <b>design of the fuse link for IT network for short-circuit protection of the main circuit</b> |                |
| • at 400 V                                                                                     | gG 63 A        |
| • at 500 V                                                                                     | gG 50 A        |
| • at 690 V                                                                                     | gG 40 A        |
| <b>Installation/ mounting/ dimensions</b>                                                      |                |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| <b>mounting position</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | any                                                                      |
| <b>fastening method</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 |
| <b>Mounting method of circuit breaker for Transformer protection, Generator protection and system protection optional standard bar mounting</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Yes                                                                      |
| <b>height</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 106 mm                                                                   |
| <b>width</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 45 mm                                                                    |
| <b>depth</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 97 mm                                                                    |
| <b>required spacing</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                          |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards 0 mm</li> <li>— backwards 0 mm</li> <li>— upwards 50 mm</li> <li>— downwards 50 mm</li> <li>— at the side 0 mm</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards 0 mm</li> <li>— backwards 0 mm</li> <li>— upwards 50 mm</li> <li>— at the side 30 mm</li> <li>— downwards 50 mm</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards 0 mm</li> <li>— backwards 0 mm</li> <li>— upwards 50 mm</li> <li>— downwards 50 mm</li> <li>— at the side 30 mm</li> </ul> </li> <li>• for grounded parts at 400 V <ul style="list-style-type: none"> <li>— downwards 30 mm</li> <li>— upwards 30 mm</li> <li>— at the side 9 mm</li> </ul> </li> <li>• for live parts at 400 V <ul style="list-style-type: none"> <li>— downwards 30 mm</li> <li>— upwards 30 mm</li> <li>— at the side 9 mm</li> </ul> </li> <li>• for grounded parts at 500 V <ul style="list-style-type: none"> <li>— downwards 30 mm</li> <li>— upwards 30 mm</li> <li>— at the side 9 mm</li> </ul> </li> <li>• for live parts at 500 V <ul style="list-style-type: none"> <li>— downwards 30 mm</li> <li>— upwards 30 mm</li> <li>— at the side 9 mm</li> </ul> </li> <li>• for grounded parts at 690 V <ul style="list-style-type: none"> <li>— downwards 50 mm</li> <li>— upwards 50 mm</li> <li>— backwards 0 mm</li> <li>— at the side 30 mm</li> <li>— forwards 0 mm</li> </ul> </li> <li>• for live parts at 690 V <ul style="list-style-type: none"> <li>— downwards 50 mm</li> <li>— upwards 50 mm</li> <li>— backwards 0 mm</li> <li>— at the side 30 mm</li> <li>— forwards 0 mm</li> </ul> </li> </ul> |                                                                          |
| <b>Connections/ Terminals</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                          |
| <b>product component removable terminal for auxiliary and control circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | No                                                                       |
| <b>type of electrical connection</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                          |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | spring-loaded terminals                                                  |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|
| • for auxiliary and control circuit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | spring-loaded terminals                          |
| <b>arrangement of electrical connectors for main current circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Top and bottom                                   |
| <b>type of connectable conductor cross-sections</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                  |
| • for main contacts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                  |
| — solid or stranded                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 2x (0.5 ... 4 mm <sup>2</sup> )                  |
| — finely stranded with core end processing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 2x (0.5 ... 2.5 mm <sup>2</sup> )                |
| — finely stranded without core end processing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 2x (0.5 ... 2.5 mm <sup>2</sup> )                |
| <b>connectable conductor cross-section for main contacts</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                  |
| • solid or stranded                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 0.5 ... 4 mm <sup>2</sup>                        |
| • finely stranded with core end processing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 0.5 ... 2.5 mm <sup>2</sup>                      |
| • finely stranded without core end processing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 0.5 ... 2.5 mm <sup>2</sup>                      |
| <b>type of connectable conductor cross-sections</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                  |
| • for auxiliary contacts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                  |
| — solid or stranded                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 2x (0.5 ... 2.5 mm <sup>2</sup> )                |
| — finely stranded with core end processing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 2x (0.5 ... 1.5 mm <sup>2</sup> )                |
| — finely stranded without core end processing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 2x (0.5 ... 1.5 mm <sup>2</sup> )                |
| <b>design of screwdriver shaft</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Diameter 3 mm                                    |
| <b>size of the screwdriver tip</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 3,0 x 0,5 mm                                     |
| IEC 61508                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                  |
| <b>T1 value</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                  |
| • for proof test interval or service life according to IEC 61508                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10 a                                             |
| Electrical Safety                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                  |
| <b>protection class IP on the front according to IEC 60529</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | IP20                                             |
| <b>touch protection on the front according to IEC 60529</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | finger-safe, for vertical contact from the front |
| Display                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                  |
| display version for switching status                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Handle                                           |
| Approvals Certificates                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                  |
| Environmental Product Declaration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                  |
| • global warming potential [CO <sub>2</sub> eq] / during manufacturing                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 1.98 kg                                          |
| • global warming potential [CO <sub>2</sub> eq] / during sales                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0.134 kg                                         |
| • global warming potential [CO <sub>2</sub> eq] / during operation                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 72.7 kg                                          |
| • global warming potential [CO <sub>2</sub> eq] / after end of life                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | -0.116 kg                                        |
| • global warming potential [CO <sub>2</sub> eq] / total                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 74.698 kg                                        |
| <div>Environment</div> <div> <a href="#">Environmental Confirmations</a>      </div>                  |                                                  |
| General Product Approval                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                  |
| <div>     </div>                                                                                                                                                                             |                                                  |
| <div> <a href="#">Special Test Certificate</a> <a href="#">Type Test Certificates/Test Report</a> </div>                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                  |
| Maritime application                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                  |
| <div>       </div> |                                                  |
| other                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                  |
| Railway                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                  |



## Further information

## Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

## Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

## Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

## Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2011-4AA20-0BA0>

## Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-4AA20-0BA0>

## Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2011-4AA20-0BA0&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2011-4AA20-0BA0&lang=en)



## Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2011-4AA20-0BA0>

## Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP='HAUPT'></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

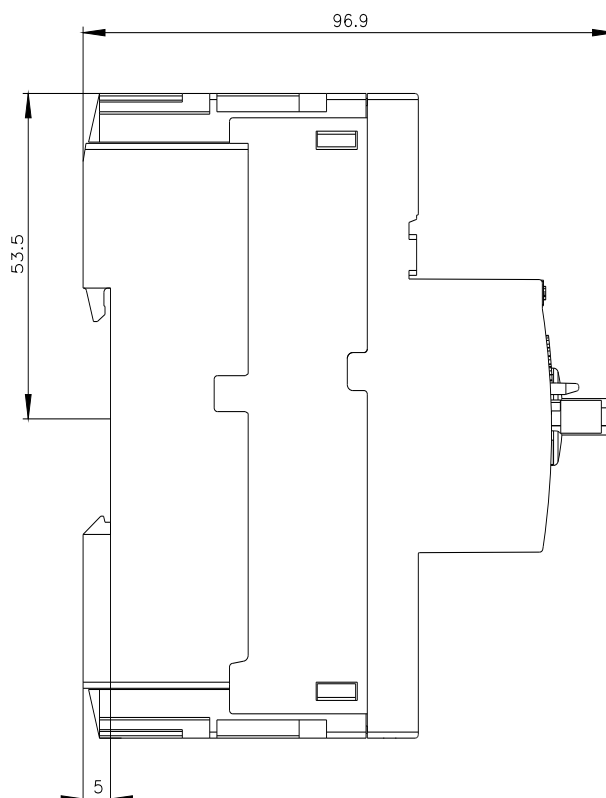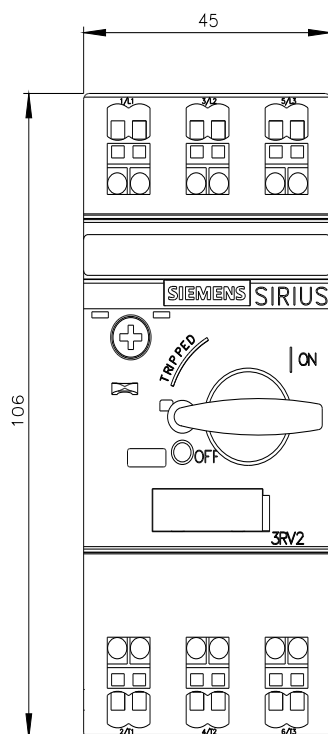

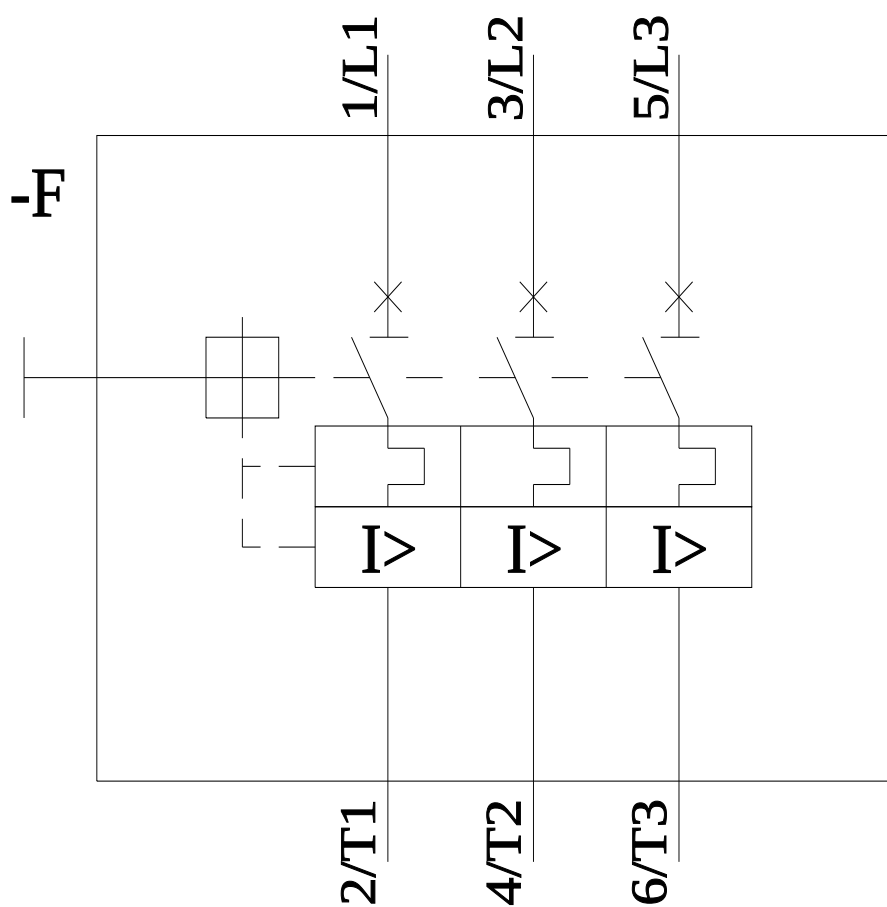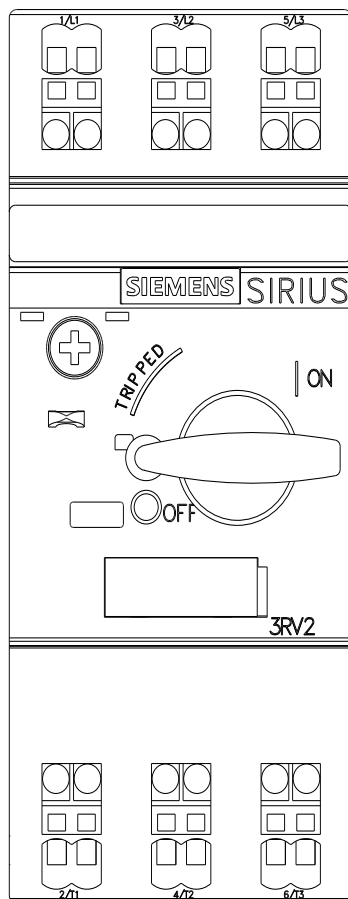

last modified:

5/5/2026