

Siemens
EcoTech



Illuminated pushbutton, 22 mm, round, plastic, yellow, pushbutton, flat, latching, Push-to-release mechanism



product brand name	SIRIUS ACT
product designation	Illuminated pushbuttons
design of the product	Actuating/signaling element
product type designation	3SU1
product line	Plastic, black, 22 mm
Enclosure	
number of command points	1
Actuator	
design of the actuating element	Flat button
principle of operation of the actuating element	latching
product extension optional	
• light source	Yes
• contact module	Yes
color of the actuating element	yellow
material of the actuating element	plastic
shape of the actuating element	round
outer diameter of the actuating element	29.5 mm
type of unlocking device	push-to-unlatch mechanism
Front ring	
product component front ring	Yes
design of the front ring	Standard
material of the front ring	plastic
color of the front ring	black
General technical data	
protection class IP	IP66, IP67, IP69(IP69K)
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13
shock resistance	
• according to IEC 60068-2-27	sinusoidal half-wave 15 g / 11 ms
• for railway applications according to EN 61373	Category 1, Class B
vibration resistance	
• according to IEC 60068-2-6	10 ... 500 Hz: 5 g
• for railway applications according to EN 61373	Category 1, Class B
operating frequency maximum	1 800 1/h
mechanical service life (operating cycles) typical	500 000
reference code according to IEC 81346-2	S
Substance Prohibitance (day/month/year)	10/01/2014

Net Weight		0.014 kg	
Ambient conditions			
ambient temperature			
• during operation		-25 ... +70 °C	
• during storage		-40 ... +80 °C	
environmental category during operation according to IEC 60721		3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%)	
Installation/ mounting/ dimensions			
height		29.5 mm	
width		29.5 mm	
shape of the installation opening		round	
mounting diameter		22.3 mm	
positive tolerance of installation diameter		0.4 mm	
mounting height		11 mm	
installation width		29.5 mm	
installation depth		24.3 mm	
Approvals Certificates			
Environmental Product Declaration			
• global warming potential [CO2 eq] / during manufacturing		0.566 kg	
• global warming potential [CO2 eq] / during operation		0.235 kg	
• global warming potential [CO2 eq] / after end of life		-0.0145 kg	
• global warming potential [CO2 eq] / total		0.787 kg	
Environment		General Product Approval	
Environmental Confirmations     			
General Product Approval		Test Certificates	
		Maritime application	
		Type Test Certificates/Test Report Special Test Certificate   	
Maritime application		other	
		Confirmation 	

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1001-0AA30-0AA0>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1001-0AA30-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1001-0AA30-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1001-0AA30-0AA0&lang=en

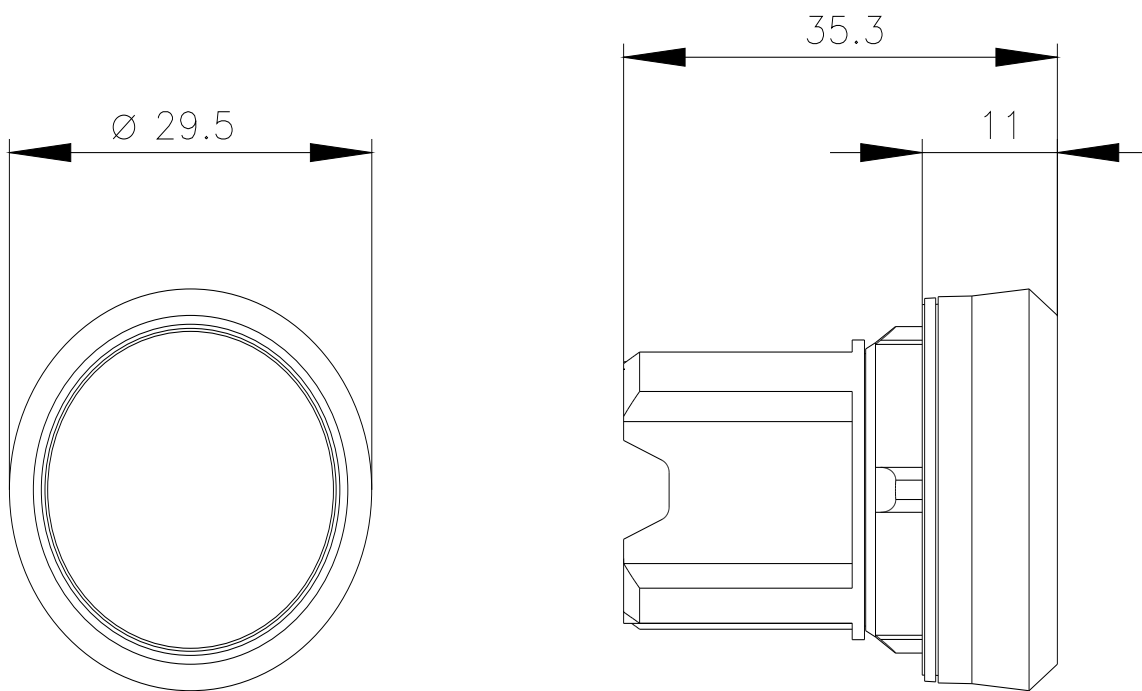

last modified:

4/4/2026 