

IMPACT67 Pro E DIO8 IOL8 M12L 5P

Ethernet/IP, compact module, plastic

Art.No.: 54631

Weight: 0.470 kg

Country of origin: DE

Model designation: IMPACT67 Pro E DIO8 IOL8 M12L 5P

Digital inputs/outputs

Ethernet 10/100 Mbit/s; M12, D-coded

IO-Link Master V1.1

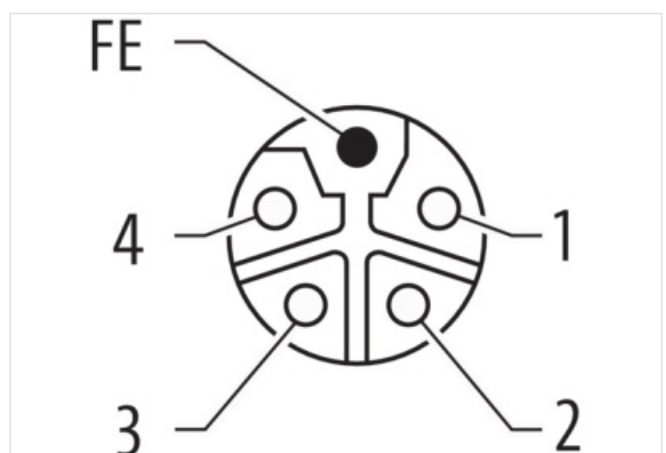
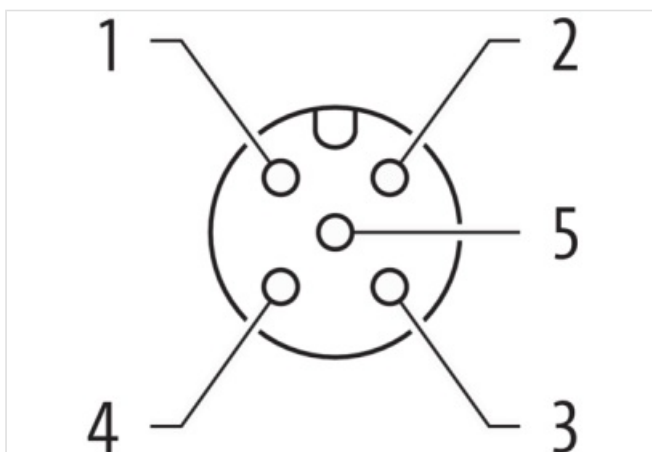
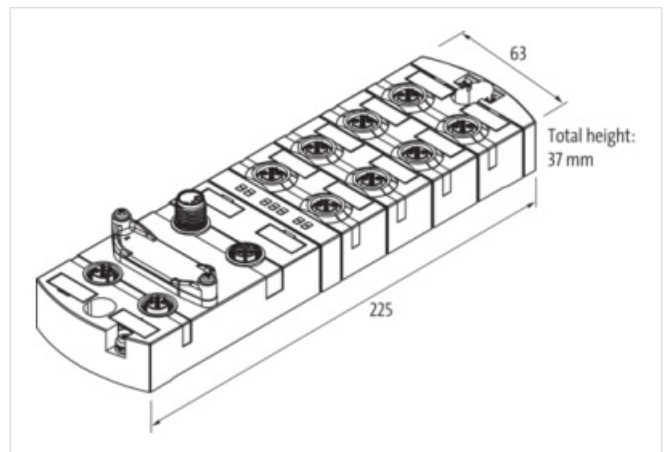
M12 Power, 5-pole, L-coded


M12, 5-pole, A-coded

Housing fully potted.

Connection cables are in the online shop under "Connection Technology".

mounting compatible with I/O modules of the MVK series

[Link to Product](#)**Illustration**



Material short text IMPACT67 Pro E DIO8 IOL8 M12L 5P

URL Webshop	https://shop.murrelektronik.com/54631
GTIN	4048879859974
ECLASS-6.0	27242604
ECLASS-6.1	27242604
ECLASS-7.0	27242604
ECLASS-7.1	27242604
ECLASS-8.0	27242604
ECLASS-8.1	27242604
ECLASS-9.0	27242604
ECLASS-9.1	27242604
ECLASS-10.0.1	27242604
ECLASS-10.1	27242604
ECLASS-11.0	27242604
ECLASS-11.1	27242604
ECLASS-12.0	27242604
ECLASS-13.0	27242604
ECLASS-14.0	27242604
ETIM-5.0	EC001599
ETIM-6.0	EC001599
ETIM-7.0	EC001599
ETIM-8.0	EC001599
customs tariff number	85389099
EAN	4048879859974
Packaging unit	1

Norm operating voltage	IEC/EN 61131-2
Operating voltage US DC	24 V
Total current US max.	16 A
Operating voltage UA DC	24 V
Total current UA max.	16 A

Electrical data Input	
Sensor current US per input max.	2 A
Current carrying capacity max.	10 A
Short-circuit protected	Yes
Overload resistant	Yes
Type input	for 3-wire sensors or mechanical switches, IO-Link Devices, PNP
Electrical data Output	
Output current per pin max.	2 A
Max. current output per port	4 A
Actuator current UA per output max.	2 A
Total current outputs max.	10 A
Overload resistant	Yes
Short-circuit protected	Yes
Industrial Communication	
Web interface	Yes
Industrial communication Ethernet/IP	
EtherNet/IP addressing	BOOTP, DIP switch, DHCP
CIP Sync	Yes
DLR (Device Level Ring)	Yes
Multiple connections	Yes
Composite Test Revision	CT16
Industrial communication IO-Link	
IO-Link type	8x Master
Port Class	A, B
IO-Link transmission rate	COM1, COM2, COM3
IO-Link process data length input	32 bytes
IO-Link process data length output	32 bytes
Automatic baudrate detection	Yes
Industrial communication IIoT functions	
JSON integration	REST-API, MQTT
OPC UA transport	UA TCP, UA Binary Encoding, UA Secure Conversation
Publishing interval OPC UA min.	100 ms
Number of sessions / clients OPC UA max.	5
Voltage monitoring	Yes
Current Monitoring	Yes
Diagnostics	
Actuator warning	per channel via LED and BUS
Temperature control	Yes
Cable break	per port
Diagnostic via BUS	per module and channel
Diagnostic via LED	per module and channel
LED display	Ethernet connection/data traffic
IO-Link events	Undervoltage supply, No voltage
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Mechanical data Mounting data	
Height	37 mm
Width	63 mm
Depth	225 mm
Suitable for mounting type	2-hole screw mounting
Environmental characteristics Climatic	

Ambient temperature (operation)	-40 °C
---------------------------------	--------

Ambient temperature (storage, transport)	-40 °C
--	--------

Connection type 4

Connection type 1	X0-X7
-------------------	-------

Connection type 2	XD1
-------------------	-----

Connection type 3	XD2
-------------------	-----

Connection type 4	XF1, XF2
-------------------	----------

Family construction form	M12
--------------------------	-----

No. of poles	5
--------------	---

Coding	A
--------	---

Gender	female
--------	--------

Color contact carrier	gray
-----------------------	------

PIN 1	24 V DC
-------	---------

PIN 2	DI / DO
-------	---------

PIN 3	0 V
-------	-----

PIN 4	DI / DO / IO-Link
-------	-------------------

PIN 5	0 V
-------	-----

Family construction form	M12
--------------------------	-----

No. of poles	5
--------------	---

Coding	L
--------	---

Gender	male
--------	------

Color contact carrier	black
-----------------------	-------

PIN 1	24 V DC (US)
-------	--------------

PIN 2	0 V
-------	-----

PIN 3	0 V
-------	-----

PIN 4	24 V DC (UA)
-------	--------------

PIN 5	PE
-------	----

Family construction form	M12
--------------------------	-----

No. of poles	5
--------------	---

Coding	L
--------	---

Gender	female
--------	--------

Color contact carrier	black
-----------------------	-------

PIN 1	24 V DC (US)
-------	--------------

PIN 2	0 V
-------	-----

PIN 3	0 V
-------	-----

PIN 4	24 V DC (UA)
-------	--------------

PIN 5	PE
-------	----

Family construction form	M12
--------------------------	-----

No. of poles	4
--------------	---

Coding	D
--------	---

Gender	female
--------	--------

Color contact carrier	black
-----------------------	-------

Mounting method	inserted, screwed
-----------------	-------------------

Tightening torque	0,6 Nm
-------------------	--------

PIN 1	TD +
-------	------

PIN 2	RD +
-------	------

PIN 3	TD -
-------	------

PIN 4	RD -
-------	------

PIN 5	n.c.
-------	------