

**M12 male recept. A-cod. front**

PUR-wires 4x0.34 1m

Art.No.: 7000-13501-9710100

Weight: 0.045 kg

Country of origin: DE

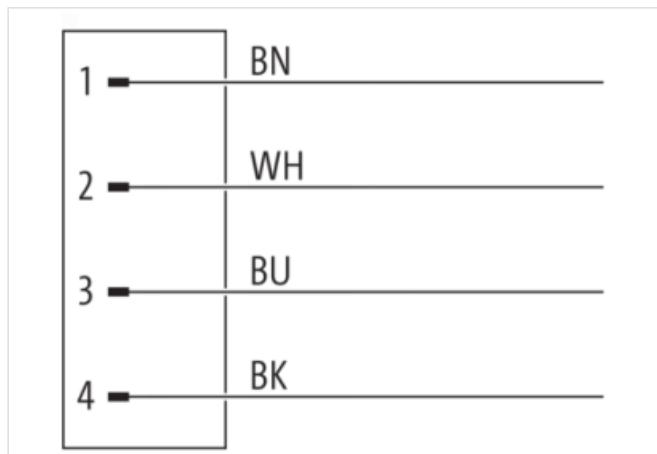
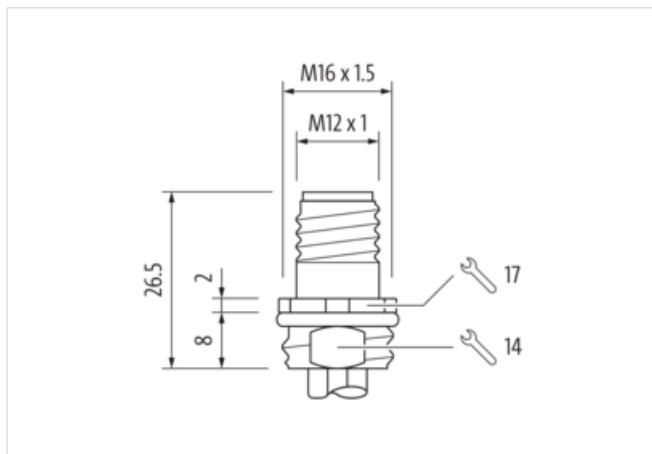
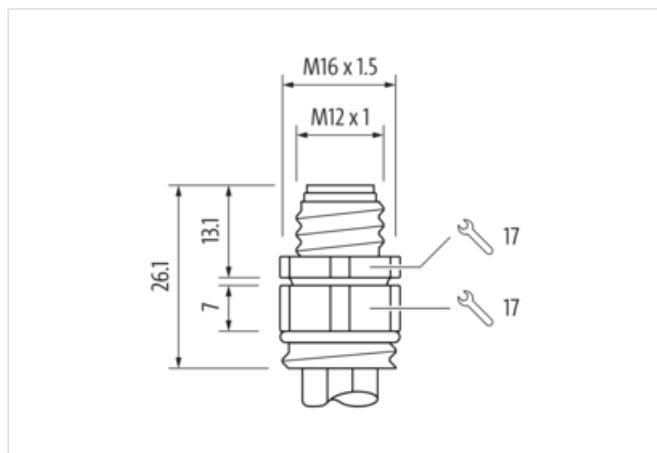
Model designation: MSAFV-T971\_1.0

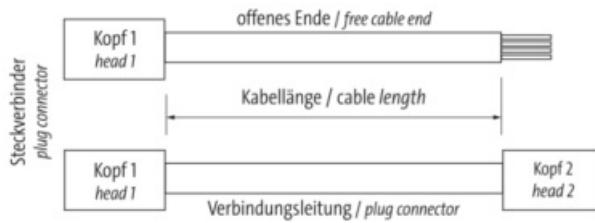
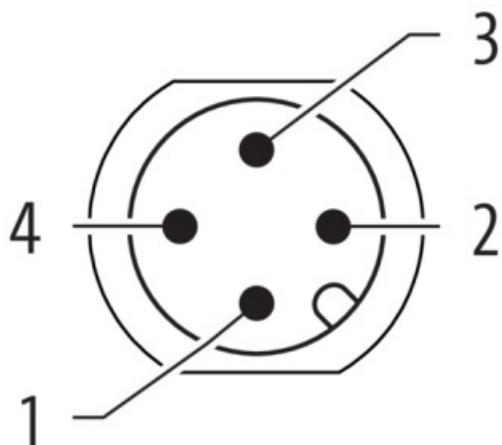
Flange male

M12, 4-pole

Front mounting

with multi-strand wire

[Link to Product](#)
**Illustration**




Toleranz Kabellängen:  
cable lenght tolerances

0m < L ≤ 0,5m	+0,03m	1,0m < L ≤ 3,0m	+0,1m
0,5m < L ≤ 1,0m	+0,05m	3,0m < L	±1,5%

Product may differ from Image



#### Header

Cable length 1,00 m

#### Side 1

Family construction form	M12
No. of poles	4
Coding	A
Mounting method	inserted, screwed
Threaded hole	M12 x 1
Tightening torque	0,6 Nm
Width across flats	SW14
Material	Zinc die-casting
Material contact	Copper alloy
Coating contact	gold plated
Degree of protection (EN IEC 60529)	IP67

#### Commercial data

URL Webshop	<a href="https://shop.murrelektronik.com/7000-13501-9710100">https://shop.murrelektronik.com/7000-13501-9710100</a>
customs tariff number	85444290
EAN	4048879294584
Packaging unit	1

#### Electrical data | Supply

Operating voltage AC max.	250 V
Operating voltage DC max.	250 V
Current operating per contact max.	4 A

#### Installation | Connection

Mounting set	M16 x 1.5
--------------	-----------

#### Device protection | Electrical

Protection NEMA	6P, 4, 3
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	2,5 kV
Material group (IEC 60664-1)	I

#### Mechanical data | Material data

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness, completeness and topicality of the information is restricted to gross negligence. Version: 2026-02-07

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | [shop@murrinc.com](mailto:shop@murrinc.com) | [shop.murrelektronik.com](http://shop.murrelektronik.com)

Material screw connection	Zinc die-casting
Coating of fitting	nickel plated
Locking material	Zinc die-casting
Coating locking	Nickelized

**Mechanical data | Mounting data**

Mounting method	Schraubgewinde
Locking techniques	Schraubgewinde

**Environmental characteristics | Climatic**

Operating temperature min.	-30 °C
Operating temperature max.	85 °C
Additional condition temperature range	depending on cable quality

**Important installation notes**

Note on bending radius	<b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

**Conformity**

Product standard	EN IEC 61076-2-101 (M12)
------------------	--------------------------

**Approvals**

UL 50E	Yes
--------	-----

**Installation | Cable**

Cable identification	971
Cable weight	33 g/m
Material wire insulation	PUR
Amount wires	4
Outer diameter insulation	1,3 mm
Conductor crosssection (wire)	0,34 mm <sup>2</sup>
Operating temperature min. (static)	-40 °C
Operating temperature max. (static)	90 °C
Operating temperature min. (dynamic)	-25 °C
Operating temperature max. (dynamic)	90 °C
Bending radius (fixed)	5 x Outer diameter