

M12 male 0° / M12 male 0° DeviceNet

PUR AWG24+AWG22 shielded vt UL/CSA+drag ch. 0.6m

Art.No.: 7000-40532-8030060

Weight: 0.067 kg

Country of origin: CZ

Model designation: MSAL0-A-U803_0.6

CANopen/DeviceNet

Male straight – male straight

M12 – M12, 5-pole

A-coded

Shielded cables




with cable sleeves




Further cable lengths on request.

Product fulfills requirements according to UN/ECE R118

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

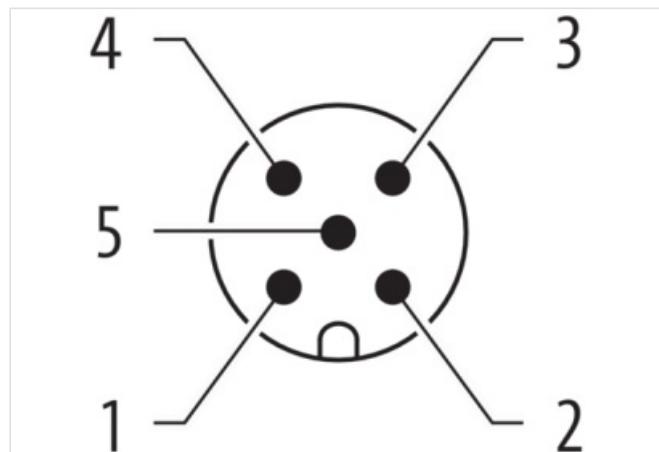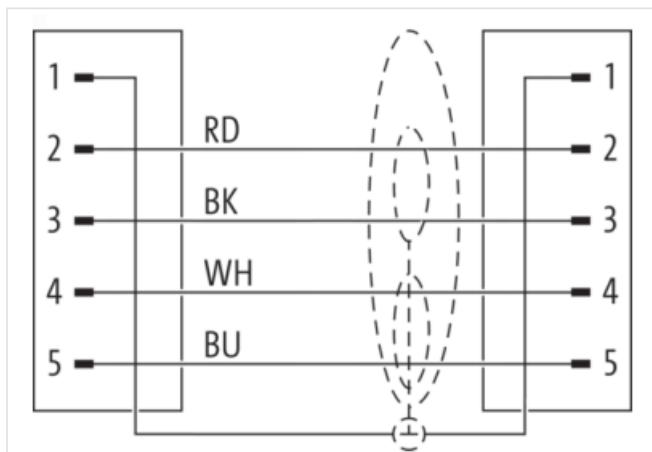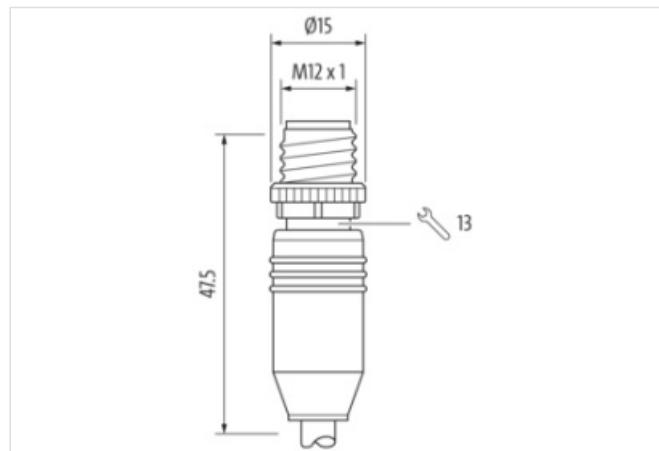[**Link to Product**](#)
Illustration

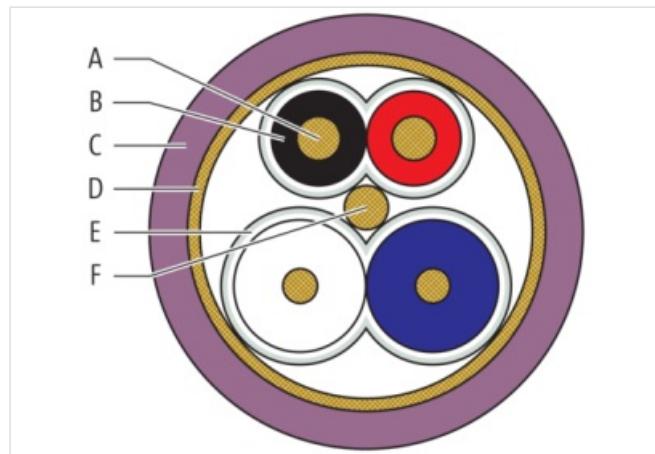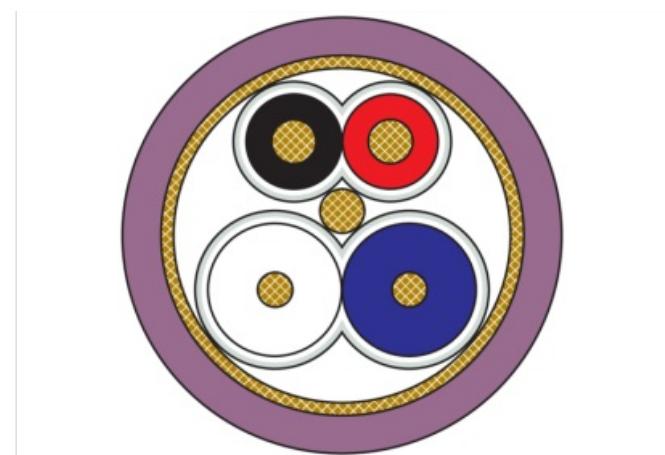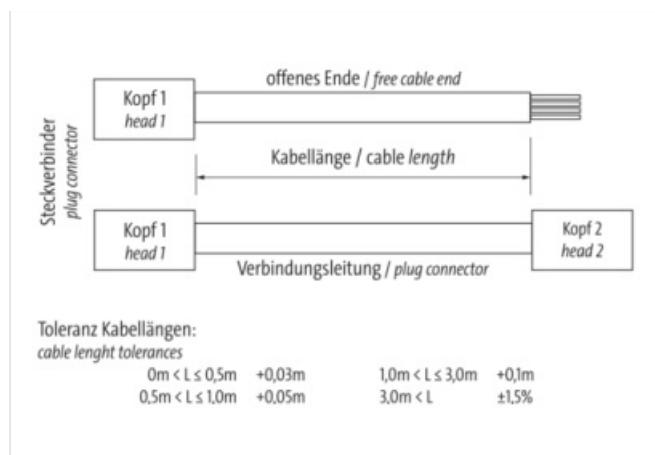


Product may differ from Image



Header

Material short text MSAL0-A-U803_0.6

Cable length 0,60 m

Side 1

Family construction form	M12
No. of poles	5
Coding	A
Gender	male
Mounting method	inserted, screwed
Threaded hole	M12 x 1
Tightening torque	0,6 Nm
Width across flats	SW13
Cable outlet	straight
Material	PUR
Material contact	Copper alloy
Coating contact	gold plated
Degree of protection (EN IEC 60529)	IP67, IP65

Side 2

Family construction form	M12
No. of poles	5
Coding	A
Gender	male
Mounting method	inserted, screwed
Threaded hole	M12 x 1
Tightening torque	0,6 Nm
Width across flats	SW13
Cable outlet	straight
Material	PUR
Material contact	Copper alloy
Coating contact	gold plated
Degree of protection (EN IEC 60529)	IP67, IP65

Commercial data

URL Webshop	https://shop.murrelektronik.com/7000-40532-8030060
GTIN	4048879901918
ECLASS-6.0	27279218
ECLASS-6.1	27060307
ECLASS-7.0	27060307
ECLASS-7.1	27060307
ECLASS-8.0	27060307
ECLASS-8.1	27060307
ECLASS-9.0	27060307
ECLASS-9.1	27060307
ECLASS-10.0.1	27060307
ECLASS-10.1	27060307
ECLASS-11.0	27060307
ECLASS-11.1	27060307
ECLASS-12.0	27060307
ECLASS-13.0	27060307
ECLASS-14.0	27060307
ETIM-5.0	EC001855
ETIM-6.0	EC001855
ETIM-7.0	EC001855
ETIM-8.0	EC001855
customs tariff number	85444290
EAN	4048879901918
Packaging unit	1

Electrical data | Supply

Operating voltage AC max.	60 V
Operating voltage DC max.	60 V
Current operating per contact max.	4 A

Device protection | Electrical

Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	1,5 kV
Material group (IEC 60664-1)	I

Mechanical data

Contour for corrugated hose	without
-----------------------------	---------

Mechanical data | Material data

Material screw connection	Zinc die-casting
Coating of fitting	Nickelized

Environmental characteristics | Climatic

Operating temperature min.	-30 °C
Operating temperature max.	85 °C
Additional condition temperature range	depending on cable quality

Important installation notes

Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

Conformity

Product standard	EN IEC 61076-2-101 (M12)
------------------	--------------------------

Installation | Cable

Cable identification	803
Function cable	Hybrid, Data, Power
Amount stranding	2
Stranding	2 wires stranded
Amount stranding (type 2)	1
Stranding (type 2)	2 stranding combinations stranded
Cable shielding (type)	copper braid, tinned
Cable shielding (coverage)	65 %
Banding	Foil
Drain wire (cross-section)	22 AWG
Wire arrangement	(white, blue), (black, red)
Cable weight	57,38 g/m
Material wire insulation	PE
Amount wires	2
Outer diameter insulation	2,1 mm
Outer diameter tolerance core insulation	± 0,05 mm
Shore hardness wire insulation	65 ± 5 Shore D
Ingredient freeness wire insulation	lead-free, CFC-free, halogen-free
Amount strands (wire)	19
Diameter of single wires	36 AWG
Conductor crosssection (wire)	24 AWG
Drain wire (cross-section)	22 AWG
Material conductor wire	copper stranded wire, tinned
Electrical function wire	Data
Material wire insulation (type 2)	PE
Outer diameter wire insulation (type 2)	2,1 mm
Tolerance outer diameter wire insulation (type 2)	± 0,05 mm
Shore hardness wire insulation (type 2)	65 ± 5 Shore D
Ingredient freeness wire insulation (type 2)	lead-free, CFC-free, halogen-free
Amount wires (type 2)	2
Amount strands wire (type 2)	19
Diameter of single wires (type 2)	36 mm
Conductor crosssection wire (type 2)	22 AWG
Material conductor wire (type 2)	copper stranded wire, tinned
Electrical function wire (type 2)	Power
Outer diameter wire insulation (type 3)	1,5 mm
Tolerance outer diameter wire insulation (type 3)	± 0,05 mm
Shore hardness wire insulation (type 3)	65 ± 5 Shore D
Amount wires (type 3)	2
Amount strands wire (type 3)	19
Diameter of single wires (type 3)	22 mm

Outer-diameter (jacket)	6,9 mm
Tolerance outer diameter (sheath)	± 5 %
Material jacket	PUR
Shore hardness jacket	89 ± 5 Shore A
Freedom from ingredients (jacket)	lead-free, CFC-free, halogen-free
Conductor resistance (wire)	78 Ω/km @ 20 °C
Conductor resistance (wire type 2)	78 Ω/km @ 20 °C
Conductor resistance (wire type 3)	54 Ω/km @ 20 °C
Electric capacitance	40.000 pF/km
Isolation resistance	5.000 MΩ × km
Nominal voltage AC max.	300 V
Withstand voltage (wire - wire)	2 kV @ 60 s
Withstand voltage (wire - shield)	2 kV @ 60 s
Current load capacity (standard)	to DIN VDE 0298-4
Current load capacity min. wire	3 A
Current load capacity min. Wire (type 2)	3 A
Current carrying capacity min. wire (type 3)	6 A
Characteristic impedance	120 Ω ± 10 % @ 10 MHz
Operating temperature min. (static)	-40 °C
Operating temperature max. (static)	80 °C
Operating temperature min. (dynamic)	-30 °C
Operating temperature max. (dynamic)	70 °C
Flame resistance	UL 1581 § 1090, UL 1581 § 1100, IEC 60332-1-2
Oil resistance	IEC 60811-404, IRM 901, NEMA WC55
Ozone resistance	IEC 60811-403, EN 50396
UV resistance	UL 1581 § 1200
Other resistances	resistant to microbes, MUD-resistant (NEK 606)
Bending radius (fixed)	6 × Outer diameter
Bending radius (dynamic)	10 × Outer diameter
No. of bending cycles (C-track)	1 Mio. @ 25 °C
Traversing distance (C-track)	5 m @ 25 °C
Travel speed (C-track)	3 m/s @ 25 °C
Acceleration (C-track)	5 m/s² @ 25 °C