

**Adaptor M12 male / M12 female A-cod. shielded**

4-pol./5-pol., analog sensors I-3,III-1/4,IV-2,V-5

Art.No.: 7000-42275-0000000

Weight: 0.015 kg

Country of origin: DE




Model designation: MSB04L0-A-U-ZE 1-4




Adapter

Male - female

M12 – M12, 5-pole

Shielded

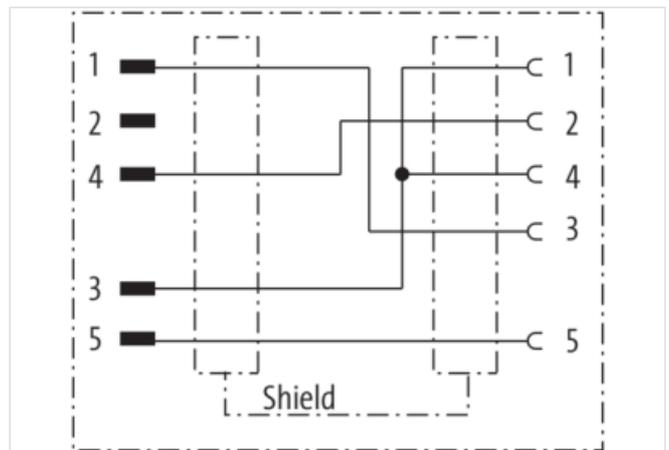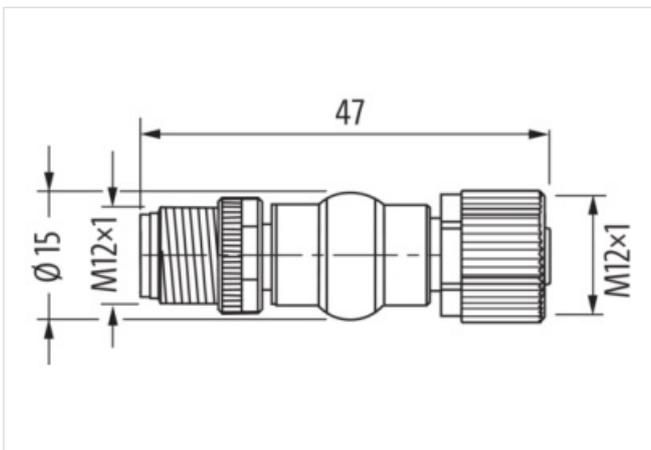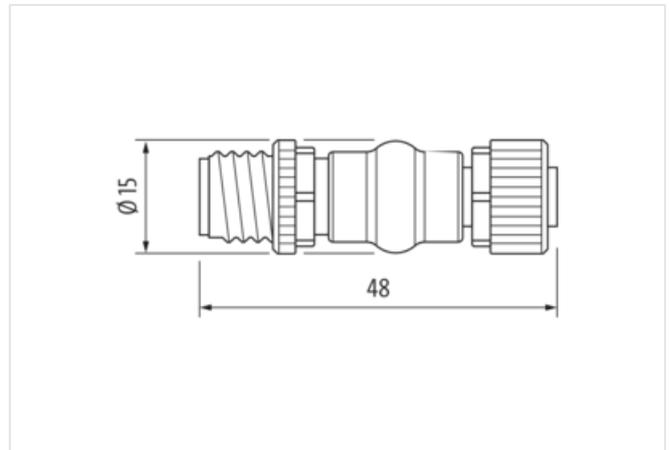[Link to Product](#)**Illustration**

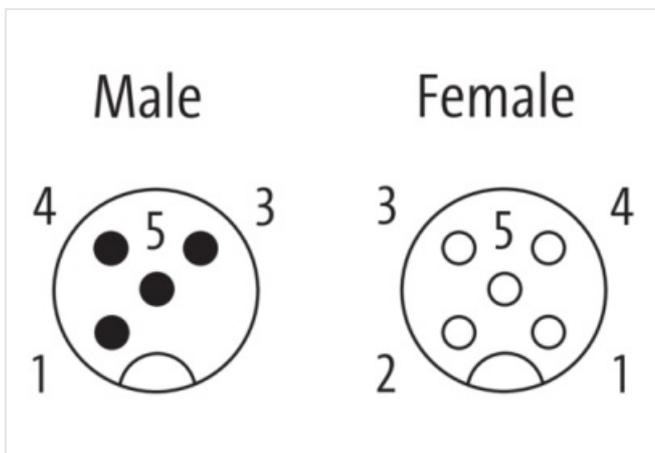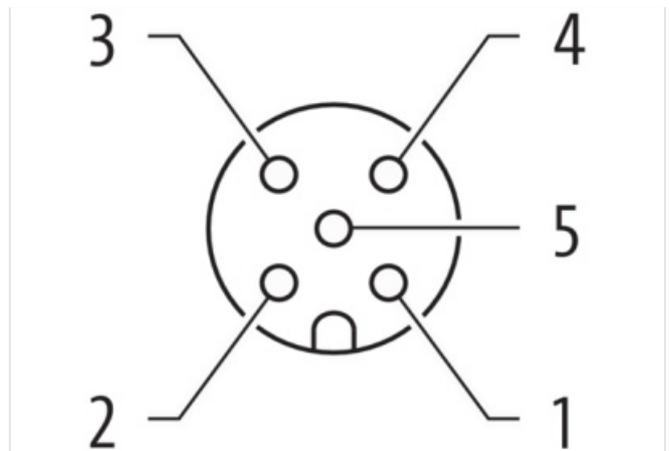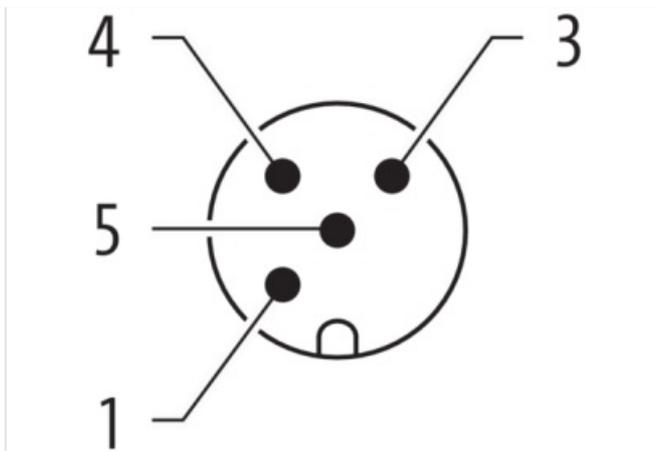

Product may differ from Image

**Commercial data**

URL Webshop	<a href="https://shop.murrelektronik.com/7000-42275-0000000">https://shop.murrelektronik.com/7000-42275-0000000</a>
customs tariff number	85366990
EAN	4048879342728
Packaging unit	1

**Electrical data | Supply**

Operating voltage AC max.	60 V
Operating voltage DC max.	60 V
Current operating per contact max.	4 A
Operating voltage AC max. (UL-listed)	30 V
Operating voltage DC max. (UL-listed)	30 V

**Installation | Connection**

Tightening torque	0,6 Nm
Mounting set	M12 x 1

**Device protection | Electrical**

Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed

Rated surge voltage	1,5 kV
---------------------	--------

Rated insulation voltage	800 V
--------------------------	-------

**Mechanical data | Material data**

Material housing	PUR
------------------	-----

Locking material	Zinc die-casting
------------------	------------------

Coating locking	Nickeled
-----------------	----------

**Mechanical data | Mounting data**

Mounting method	inserted, screwed, Shaking protection
-----------------	---------------------------------------

**Environmental characteristics | Climatic**

Operating temperature min.	-30 °C
----------------------------	--------

Operating temperature max.	85 °C
----------------------------	-------

**Important installation notes**

Note on bending radius	<b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
------------------------	---

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
-----------------------	---