

M12 fem. recept. X-cod. / RJ45 male 0° shielded

TPE 4x2x26AWG SF/UTP CAT6a bu UL/CSA. CMR 0.2m

Art.No.: 7700-51551-S4X0020

Weight: 0.042 kg

Country of origin: DE

Model designation: MSXBFH-RA-08D_S4X_0.2-ZS

USA

Ethernet CAT6A

Flange female straight – male straight

RJ45 – M12, 8-pole

X-coded




Shielded






Rear mounting

without cable sleeves

Protection cap

Transmission properties with channel transmission up to 50 m

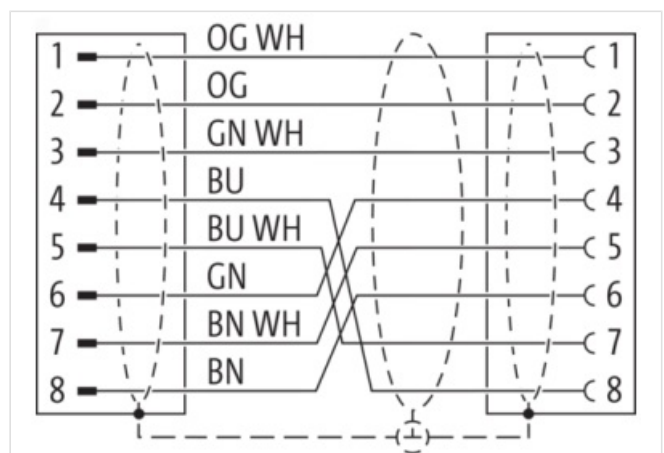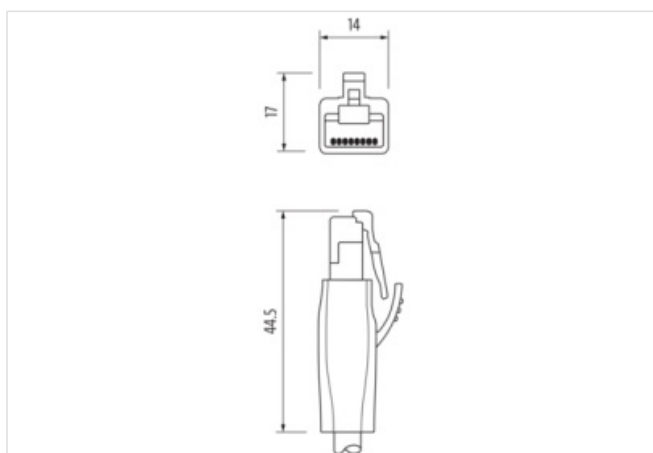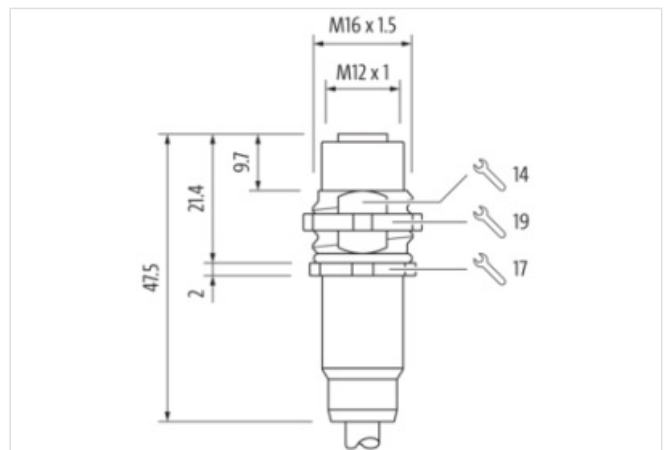[Link to Product](#)**Illustration**

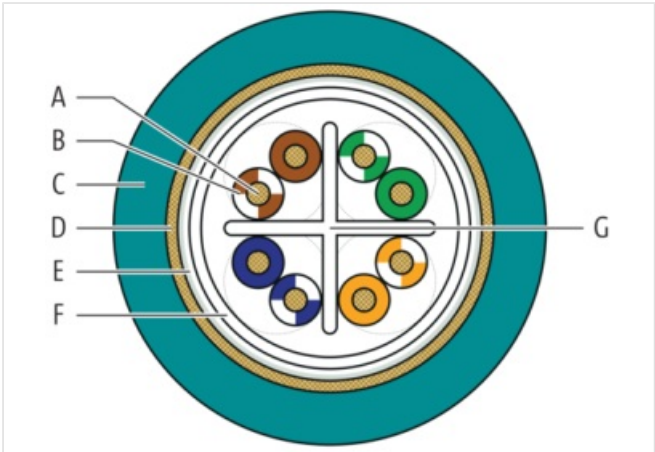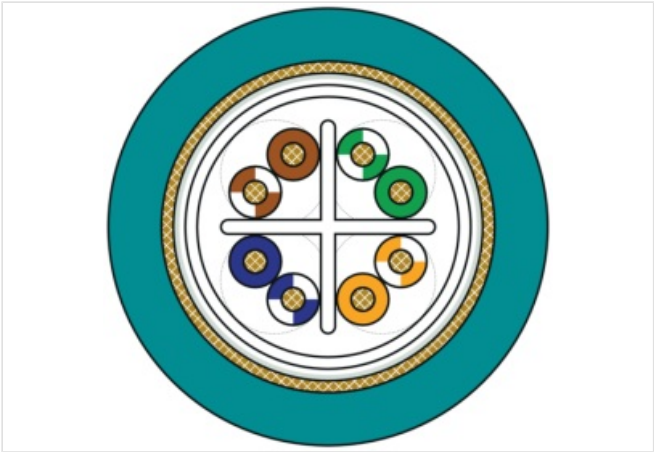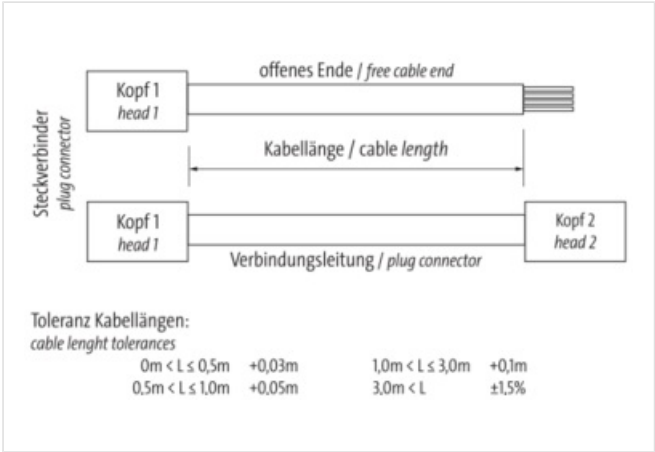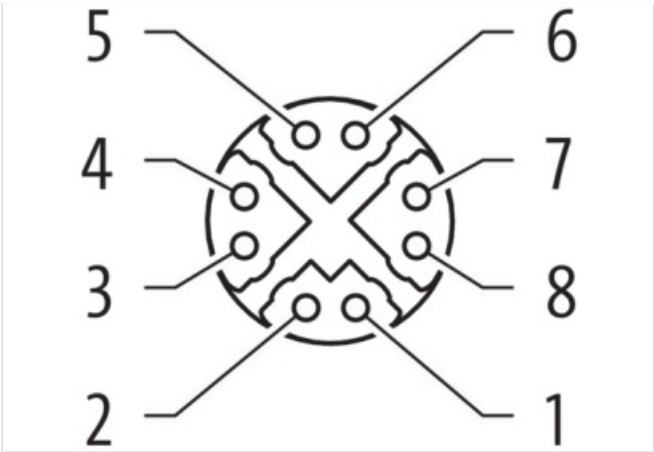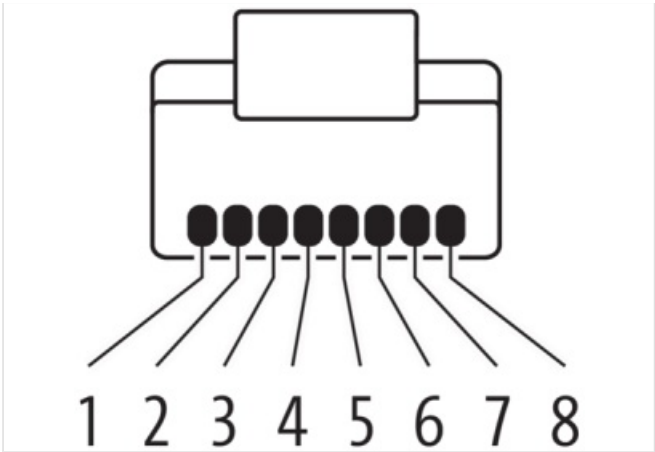

Product may differ from Image



Header

Material short text MSXBFH-RA-08D_S4X_0.2-ZS

Cable length 0,20 m

Side 1

Family construction form	M12
No. of poles	8
Coding	X
Gender	female
Mounting method	inserted, screwed
Threaded hole	M12 x 1
Tightening torque	0,6 Nm
Width across flats	SW17
Cable outlet	straight
Degree of protection (EN IEC 60529)	IP67

Side 2

Family construction form	RJ45
No. of poles	8
Coding	X
Gender	male
Mounting method	inserted
Cable outlet	straight
Degree of protection (EN IEC 60529)	IP20

Commercial data

URL Webshop	https://shop.murrelektronik.com/7700-51551-S4X0020
GTIN	4048879704014
ECLASS-6.0	27279221
ECLASS-6.1	27279220
ECLASS-7.0	27440103
ECLASS-7.1	27440103
ECLASS-8.0	27440103
ECLASS-8.1	27440103
ECLASS-9.0	27440103
ECLASS-9.1	27440109
ECLASS-10.0.1	27440109
ECLASS-10.1	27440103
ECLASS-11.0	27440109
ECLASS-11.1	27440103
ECLASS-12.0	27440103
ECLASS-13.0	27440109
ECLASS-14.0	27440109
ETIM-5.0	EC002599
ETIM-6.0	EC002599
ETIM-7.0	EC002599
ETIM-8.0	EC002599
customs tariff number	85444290
EAN	4048879704014
Packaging unit	1

Electrical data | Supply

Operating voltage DC max.	60 V
Operating current max.	0,5 A
Operating voltage DC (UL-listed)	30 V

Industrial Communication

Data transmission rate max.	10 Gbit/s
Transfer parameters	CAT6, Class EA (ISO/IEC 11801:2002), (EN 50173-1)

Diagnostics

Status indication LED	No
-----------------------	----

Installation | Connection

Mounting set	M16 x 1.5
--------------	-----------

Installation | Pin assignment

Configuration	fully used
---------------	------------

Device protection | Electrical

Additional condition protection degree	inserted, screwed
--	-------------------

Pollution Degree	3
------------------	---

Rated surge voltage	0,8 kV
---------------------	--------

Material group (IEC 60664-1)	I
------------------------------	---

Mechanical data

Contour for corrugated hose	without
-----------------------------	---------

Mechanical data | Material data

Color contact carrier	green
-----------------------	-------

Coating of fitting	nickel plated
--------------------	---------------

Environmental characteristics | Climatic

Operating temperature min.	-30 °C
----------------------------	--------

Operating temperature max.	85 °C
----------------------------	-------

Additional condition temperature range	depending on cable quality
--	----------------------------

Important installation notes

Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
------------------------	---

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
-----------------------	---

Installation | Cable

Cable identification	S4X
----------------------	-----

Function cable	Data
----------------	------

Amount stranding	4
------------------	---

Stranding	2 wires stranded
-----------	------------------

Amount stranding (type 2)	1
---------------------------	---

Stranding (type 2)	4 stranding combinations stranded around insulation element
--------------------	---

Banding	Foil
---------	------

Filler	Insulation element
--------	--------------------

Cable weight	59,53 g/m
--------------	-----------

Material wire insulation	HDPE
--------------------------	------

Amount wires	8
--------------	---

Outer diameter insulation	0,9 mm
---------------------------	--------

Outer diameter tolerance core insulation	± 0,05 mm
--	-----------

Ingredient freeness wire insulation	lead-free, CFC-free
-------------------------------------	---------------------

Amount strands (wire)	7
-----------------------	---

Diameter of single wires	26 AWG
--------------------------	--------

Conductor crosssection (wire)	26 AWG
-------------------------------	--------

Material conductor wire	copper stranded wire, tinned
-------------------------	------------------------------

Outer-diameter (jacket)	7,4 mm
-------------------------	--------

Tolerance outer diameter (sheath)	± 5 %
-----------------------------------	-------

Material jacket	TPE
-----------------	-----

Shore hardness jacket	80 ± 5 Shore A
-----------------------	----------------

Freedom from ingredients (jacket)	lead-free, CFC-free
-----------------------------------	---------------------

Cable length max.	66 m
-------------------	------

Conductor resistance (wire)	212 Ω/km @ 20 °C
-----------------------------	------------------

Electrical capacity line constant (wire - wire)	84.850 pF/km
---	--------------

Nominal voltage max.	600 V
----------------------	-------

Loop resistance	424 Ω /km
Withstand voltage (wire - wire)	1.5 kV @ 2 s
Withstand voltage (wire - jacket)	1.5 kV @ 2 s
Current load capacity (standard)	to DIN VDE 0298-4
Current load capacity max. (wire)	2 A
Characteristic impedance	100 Ω
Operating temperature min. (static)	-40 °C
Operating temperature max. (static)	80 °C
Operating temperature min. (dynamic)	-40 °C
Operating temperature max. (dynamic)	80 °C
Operating temperature min. (drag chain)	-40 °C
Operating temperature max. (drag chain)	80 °C
Storage temperature min.	-40 °C
Storage temperature max.	80 °C
Bending radius (fixed)	4 × Outer diameter
Bending radius (dynamic)	18 × Outer diameter
No. of bending cycles (C-track)	35 Mio. @ 25 °C
Traversing distance (C-track)	0.6 m @ 25 °C
Travel speed (C-track)	1.2 m/s @ 25 °C
Acceleration (C-track)	2.4 m/s ² @ 25 °C
No. of torsion cycles	3 Mio. @ 25 °C
Torsion stress	± 270 °/m
Torsion speed	60 cycles/min @ 25 °C