

Features

High Daylight Visibility, Single Color Beacon with Optional Alarm for Indoor or Outdoor Use




- Highly visible indicator provides bright, even light in direct sunlight
- Five color choices available
- 36 mm threaded polycarbonate base
- Rugged IP66, UL Type 4X housing
- Rugged UV-stabilized polycarbonate base and window
- 100 V AC to 240 V AC operating voltage

Models

Standard models shown. Contact factory for other options.

Family	Style	—	Type	Voltage	Color	Audible	Connector ⁽¹⁾
K100	B	—	BL	Z	G	A	Q
	B = Basic		BL = Beacon	Z = AC	G = Green Y = Yellow R = Red B = Blue W = White	Blank = None A = Audible	Q = Integral 5-pin 1/2 in. 20UNF male quick-disconnect connector

Wiring Diagrams

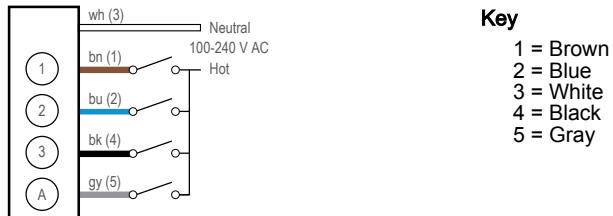

An "X" denotes an active input.

For example: When Input 1 and Input 3 are both active, the indicator will be Flashing at 5 Hz.

Default Configuration

Wiring				Operating Mode/Function	
Brown (Input 1)	Blue (Input 2)	Black (Input 3)	Gray (Input 4)	Non-Audible	Audible
X				Flashing at 1 Hz	Flashing at 1 Hz
	X			Steady	Steady
		X		Intensity Sweep	Intensity Sweep
X		X		Flashing at 5 Hz	Flashing at 5 Hz
X	X			Flashing at 0.5 Hz	Flashing at 0.5 Hz
	X	X		Strobe	Strobe
X	X	X		3-pulse Strobe	3-pulse Strobe
			X	Off	Audible Continuous
X			X	Flashing at 1 Hz	Flashing at 1 Hz, Audible Continuous

Continued on page 2

⁽¹⁾ Models with a quick-disconnect connector require a mating cordset.

Continued from page 1

Wiring				Operating Mode/Function	
Brown (Input 1)	Blue (Input 2)	Black (Input 3)	Gray (Input 4)	Non-Audible	Audible
	X		X	Steady	Steady, Audible Continuous
		X	X	Intensity Sweep	Intensity Sweep, Audible Continuous
X		X	X	Flashing at 5 Hz	Flashing at 5 Hz, Audible Continuous
X	X		X	Flashing at 0.5 Hz	Flashing at 0.5 Hz, Audible Continuous
	X	X	X	Strobe	Strobe, Audible Continuous
X	X	X	X	3-pulse Strobe	3-pulse Strobe, Audible Continuous

Specifications

Supply Protection Circuitry

Protected against reverse polarity and transient voltages

Leakage Current Immunity

600 μ A

The use of relay output PLC is recommended since there is no leakage current. Solid state output PLCs often have leakage current above 1 mA and, therefore, turn the light on in the off state. To counteract the leakage current, a shunt resistor must be used. A resistor must be applied from the neutral wire of the device to the hot wire of each channel of the device.

Indicator Response Time

On Response: 625 ms (maximum)
Off Response: 50 ms (maximum)

Connections

Integral 5-pin 1/2 in. 20UNF male quick-disconnect connector
Models with a quick disconnect require a mating cordset

Mounting

M36 by 2.0 threaded base, maximum torque 5.0 N·m (44 inch-lbf)
Interior 3/4-14 NPT Thread
Mounting nut included

Supply Voltage and Current

100 V AC to 240 V AC, 50 Hz to 60 Hz

Maximum current (mA AC at 60 Hz):

Adjacent Unit Mounting Separation Distance

Minimum: 0 in (mounted with unit flanges touching)

Audible Characteristics

Sound Intensity, 101 dB, 2.5 KHz, at 1 m (typical)

Construction

Base, Dome, and Nut: Polycarbonate

Operating Conditions

–40 °C to +60 °C (–40 °F to +140 °F)
90% at +60 °C maximum relative humidity (non-condensing)
Storage Temperature: –40 °C to +70 °C (–40 °F to +158 °F)

Vibration and Mechanical Shock

Meets IEC 60068-2-6 requirements (Vibration: 10 Hz to 55 Hz, 1.0 mm amplitude, 5 minutes sweep, 30 minutes dwell)
Meets IEC 60068-2-27 requirements (Shock: 30G 11 ms duration, half sine wave)
Impact: IK10 (60068-2-75)

Environmental Rating

IP66, UL Type 4X

LED Lifetime

Lumen maintenance L_{70}

When operating within specifications, output decreases less than 30% after 42,000 hours

Voltage	Steady On, Flash, or Strobe	
	Light Only	Light & Audible
100	65	75
240	45	50


Default Indicator Characteristics

Color	Dominant Wavelength (nm) or Color Temperature (CCT)	Color Coordinates ⁽²⁾		Lumen Output (Typical at 25 °C)
		x	y	
Green	528 nm	0.1603	0.6973	200
Yellow	589 nm	0.5557	0.4276	200
Red	625 nm	0.6999	0.2982	93
Blue	475 nm	0.1167	0.1121	60
White	5500K ± 250	0.3320	0.3433	240

Internal temperature compensation circuitry: Reduces the Lumen Output to decrease the unit internal operating temperature. The amount of reduction is dependent on the ambient operating temperature, supply voltage, color, and/or audible functions being utilized.

Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.

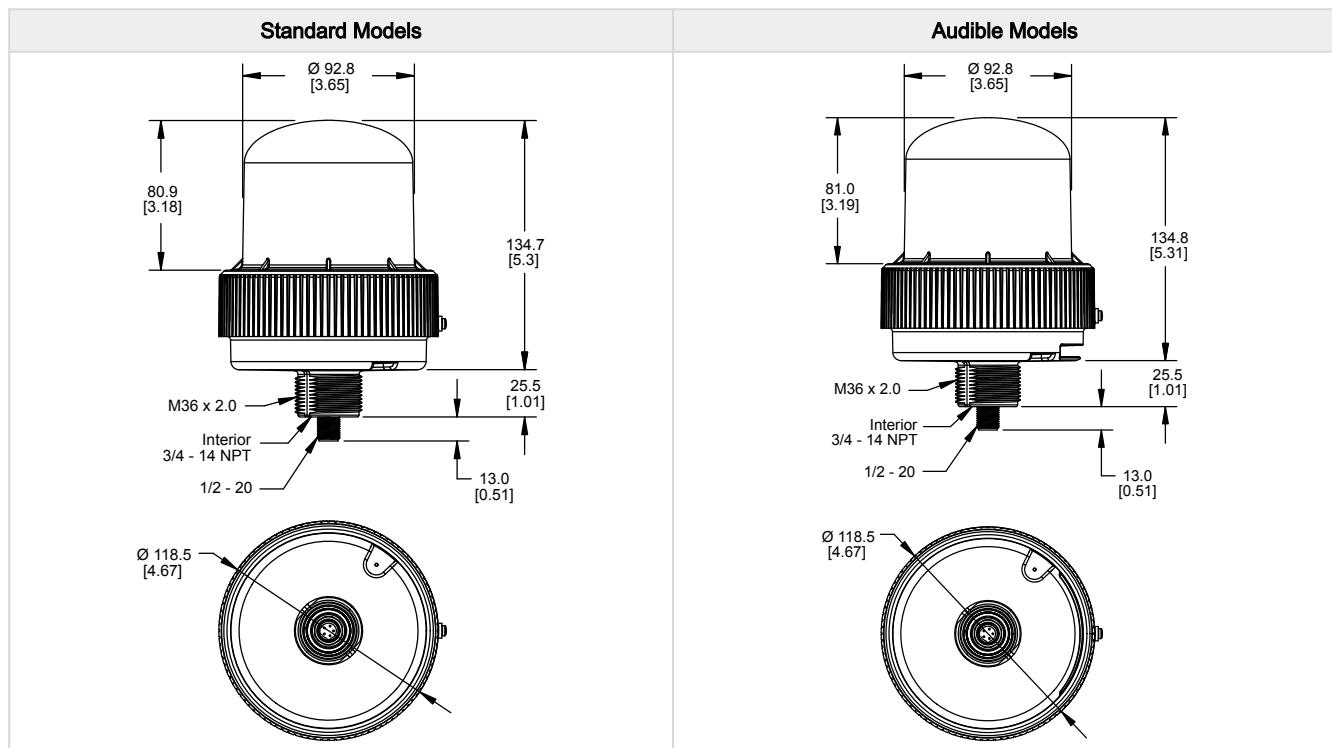

⁽²⁾ Refer to CIE 1931 chromaticity diagram or color chart, to show equivalent color with indicated color coordinates.

Accessories

Cordsets

All measurements are listed in millimeters, unless noted otherwise. The measurements provided are subject to change.


5-Pin Single-Ended 1/2-in Dual Key Female Cordsets				
Model	Length	Style	Dimensions	Pinout (Female)
MQAC2-506	2 m (6.56 ft)	Straight		 1 = Brown 2 = Blue 3 = White 4 = Black 5 = Gray
MQAC2-515	5 m (16.4 ft)			
MQAC2-530	9.14 m (30 ft)			

Brackets


LMB36RA <ul style="list-style-type: none"> Indicator light right-angle mounting 36 mm mounting hole Stainless steel 	
---	--

Elevated Mount System

Elevated Mount System (1/2" Pipes)

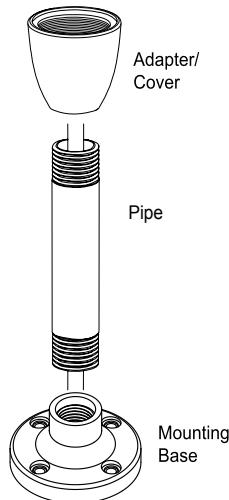

Adapter/Cover Model	Description		
SA-M36E12	<ul style="list-style-type: none"> Adapter from M36 thread to 1/2-14 NPSM thread Streamlined black plastic mounting base adapter/cover Drilled hole 		
Black Anodized Aluminum, 1/2 in. NPT Pipe Models SOP-E12-150A , 150 mm (6 in) long SOP-E12-300A , 300 mm (12 in) long SOP-E12-600A , 600 mm (24 in) long SOP-E12-900A , 900 mm (36 in) long	Clear Anodized Aluminum, 1/2 in. NPT Pipe Models SOP-E12-150AC , 150 mm (6 in) long SOP-E12-300AC , 300 mm (12 in) long SOP-E12-600AC , 600 mm (24 in) long SOP-E12-900AC , 900 mm (36 in) long	Description <ul style="list-style-type: none"> Elevated-use stand-off pipe Threaded at both ends Compatible with most industrial environments 	
Mounting Base Model	Description		
SA-F12	<ul style="list-style-type: none"> Elevated-use stand-off pipes (1/2 in, NPSM/DN15) M5 mounting hardware and nitrile gasket included Die-cast zinc base with black paint 		

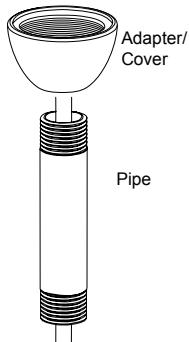Elevated Mount System (3/4" Pipes)

Adapter/Cover Model	Description
SA-M36SOP	<ul style="list-style-type: none"> M36 thread adapter with clearance for 3/4 pipe mount Streamlined black plastic mounting base adapter/cover Drilled hole
Black Anodized Aluminum, 3/4 in. NPT Pipe Models	
SOP-E34-150A, 150 mm (6 in) long	<ul style="list-style-type: none"> Elevated-use stand-off pipe Threaded at both ends Compatible with most industrial environments
SOP-E34-300A, 300 mm (12 in) long	
SOP-E34-600A, 600 mm (24 in) long	
SOP-E34-900A, 900 mm (36 in) long	

Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change. Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.