
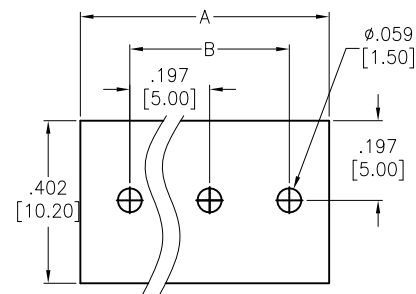




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/21/13	

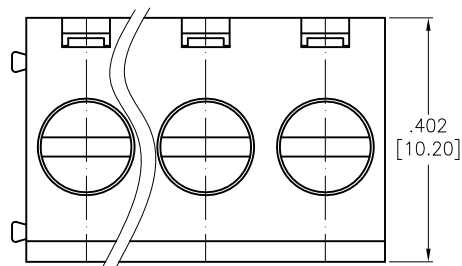

RECOMMENDED PCB LAYOUT

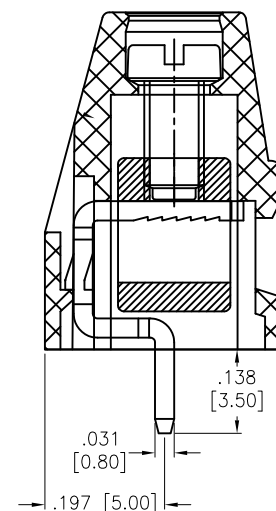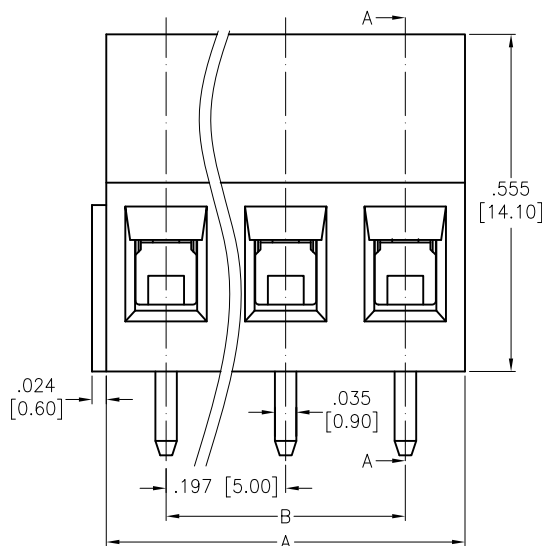

SECTION A-A

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator Color: Green

Contact: Brass, Tin plated.

Screw: Steel, M2.5, Zinc plated.

Cage: Brass, Nickel plated

Electrical:

Voltage rating: 300 V

Current rating: 16 A

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min @ 500 VDC

Dielectric withstanding voltage: 2,000 VAC for 1 minute

Mechanical:

Wire Range: 12~22 AWG, 2.5mm²

Wire strip length: 6~7mm

Torque: 0.4Nm, 3.6Lb-in

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 24

A = .197" [5.00] x No. of positions

B = .197" [5.00] x No. of spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	HR	11/21/13
CHECKED	SC	11/21/13
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
MODULAR EURO BLOCK, VERTICAL,
.197" [5.00] PITCH, COLOR GREEN

SIZE	PART NO.	REV.
X	EBAG-XX-C	-
REF: S00067C	SCALE: NTS	SHEET 1 OF 1