
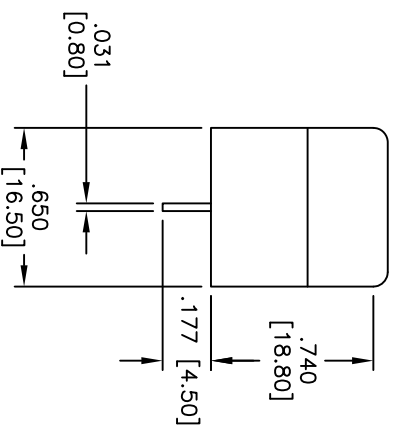
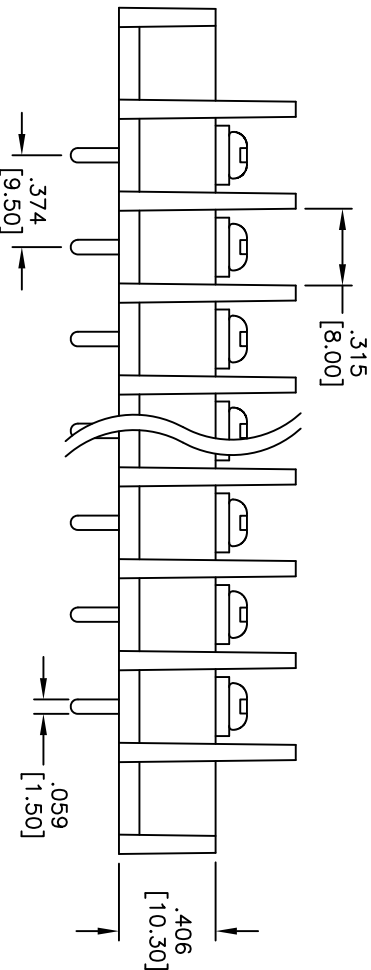


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/26/10	
A		REVISED SHAPE	6/9/14	HR/NP

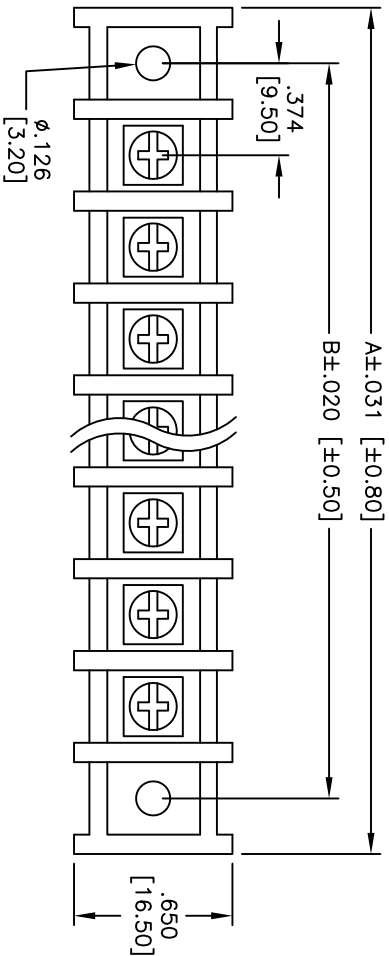

SPECIFICATIONS:

Material:
Insulator: Nylon 66, rated UL 94V-0
Insulator color: Black
Contacts: Brass, Tin Plated
Screws: M3.5, Nickel Plated Steel
Electrical:
Operating voltage: 300 VAC max.
Current rating: 15 Amps max.
Insulation resistance: 1000 Mohms min. @ 500 VDC
Dielectric withstanding voltage: 2,000 VAC for 1 minute
Mechanical:
Wire Range Awg: 14 - 22 STR
Screw Torque Value: 12Kg-cm
Temperature Rating:
Operating temperature: -40°C to +120°C
Environmental:
Lead free, RoHS compliant

Positions: 2 thru 32
A = .374 [9.50] x No. of (Poles + 1) + .453 [11.50]
B = .374 [9.50] x No. of (Poles + 1)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				ADAM TECH			
HOLES				909 Railway Avenue, Union, NJ 07083			
.X	± .10	ØX	± .10	Phone: 908-687-5000 Fax: 908-687-5710			
.XX	± .020	ØXX	± .015	TITLE .374 [9.50] CENTERLINE BARRIER BLOCK, VERTICAL PCB TAILS, MOUNT ENDS			
.XXX	± .015	ØXXX	± .010				
APPROVALS							
DRAWN	DY	2/26/10		SIZE	PART NO.	REV.	
CHECKED				X	TBF-XX-01-M	-	
APPROVED				REF: S00031T	SCALE: NTS	SHEET 1 OF 1	

