

12×8 DOTS MATRIX LED DRIVER

DESCRIPTION

The IS31FL3736B is a general purpose 12×8 LEDs matrix driver with 1/12 cycle rate. The device can be programmed via an I2C compatible interface. Each LED can be dimmed individually with 8-bit PWM data which allowing 256 steps of linear dimming.

IS31FL3736B features 3 Auto Breathing Modes which are noted as ABM-1, ABM-2 and ABM-3. For each Auto Breathing Mode, there are 4 timing characters which include current rising / holding / falling / off time and 3 loop characters which include Loop-Beginning / Loop-Ending / Loop-Times. Every LED can be configured to be any Auto Breathing Mode or No-Breathing Mode individually.

FEATURES

- Supply voltage range from 2.7V to 5.5V
- Programmable 12×8 (32 RGBs) matrix size with de-ghost function
- 3 Auto Breath Modes and PWM Mode
- Auto breath offers 128 steps gamma current, interrupt and state look up registers
- 1kHz/2kHz/4kHz/7.4kHz/25kHz PWM frequency option
- 256 steps global current setting
- Individual PWM control 256 steps
- Individual open and short error detect function
- QFN-40 (5mm×5mm)
- RoHS & Halogen-Free Compliance
- TSCA Compliance

QUICK START

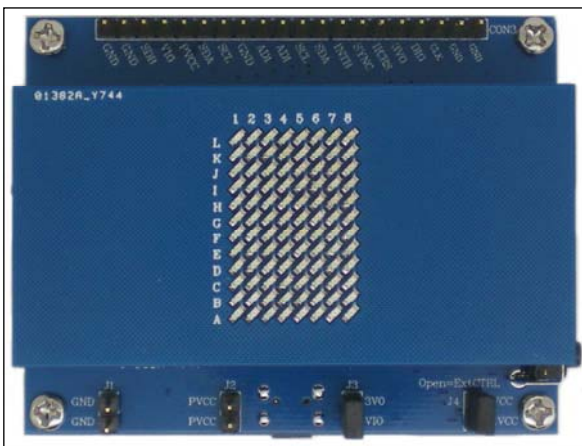


Figure 1 Photo of IS31FL3736B Evaluation Board

RECOMMENDED EQUIPMENT

- 5.0V, 2A power supply

ABSOLUTE MAXIMUM RATINGS

- ≤ 5.5V power supply

Caution: Do not exceed the conditions listed above, otherwise the board will be damaged.

PROCEDURE

The IS31FL3736B evaluation board is fully assembled and tested. Follow the steps listed below to verify board operation.

Caution: Do not turn on the power supply until all connections are completed.

- 1) Short J3 to connect 3V0 and VIO.
- 2) Short J4 to connect PVCC and U1VCC.
- 3) Connect the 5VDC power to the connector (J1&J2).
- 4) Turn on the power supply/Plug in the Micro USB Pay attention to the supply current. If the current exceeds 1A, please check for circuit fault.

12x8 DOTS MATRIX LED DRIVER

ORDERING INFORMATION

Part No.	Temperature Range	Package
IS31FL3736B-QFLS4-EB	-40°C to +125°C (Industrial)	QFN-40, Lead-free

Table 1 Ordering Information

For pricing, delivery, and ordering information, please contact Lumissil's analog marketing team at analog@lumissil.com or (408) 969-6600.

EVALUATION BOARD OPERATION

The IS31FL3736B evaluation board has three animation display modes. Press K1 to switch configurations.

- 1) Line-shaded animation
- 2) Heart animation
- 3) Dot-shaded line animation
- 4) All LED turn on

Note: IS31FL3736B solely controls the FxLED function on the evaluation board.

SOFTWARE CONTROL

J4 default setting is closed (short). If it is set to open, the U1 (LDO) will stop working and all the 3V, including the supply of MCU will be cut off, all the MCU's IO will be high impedance (open-drain) and external control is allowed.

The IS31FL3736B can set its I2C bus interface logic threshold based on the voltage on the VIO pin. An external VIO voltage in the range of $1.8V \leq V_{IO} \leq V_{CC}$ can be applied after removing (open) the J4 jumper.

The board comes with J4 default setting closed (short). If it is set to open, the user can connect an external VIO voltage supply, the external VIO voltage is recommended to equal to ex-IIC's high logic.

Follow the steps listed below for external control.

- 1) Open J4 to disconnect the power of U1, disable the 3V0 (3.0V).
- 2) Open J3 to disconnect the VIO to 3V0 and connect an external MCU VCC to VIO.
- 3) Pull-up or short the SDB to VIO (Can short by the jumper cap from J3 or J4).
- 4) Connect the 5VDC power to the connector (J1&J2, skip this step if use micro-USB as the power).
- 5) Turn on the power supply/Plug in the Micro USB Pay attention to the supply current. If the current exceeds 1A, please check for circuit fault.
- 6) Start external IIC control.

Caution: If J4 is closed (shorted), user can't connect the user's MCU VCC to VIO directly, otherwise the user's MCU (maybe 1.8V) will connect to evaluation board's VIO (3.0V) and maybe damaged.

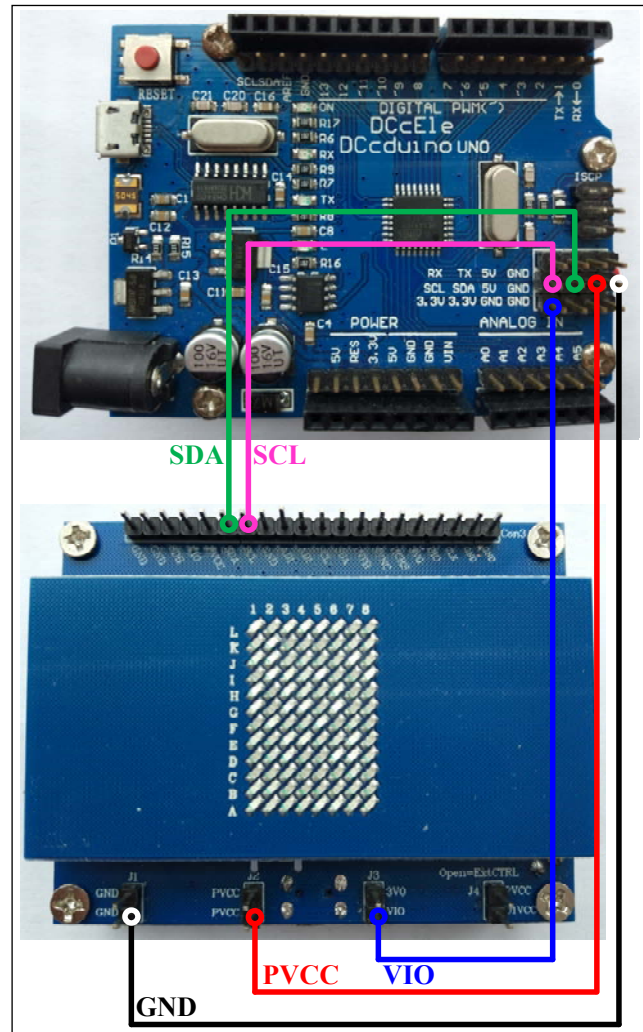


Figure 2 Photo of Arduino connect to Evaluation Board

Follow the steps listed below for external Arduino control.

The Arduino hardware consists of an Atmel microcontroller with a bootloader allowing quick firmware updates. First download the latest Arduino Integrated Development Environment IDE (1.6.12 or greater) from www.arduino.cc/en/Main/Software. Then download the latest IS31FL3736B test firmware (sketch) from the Lumissil website <http://www.lumissil.com/products/led-driver/fxled>.

- 1) Open J4 and J3.
- 2) Pull-up or short the SDB of Con3 to VIO (Use the

12×8 DOTS MATRIX LED DRIVER

- jumper cap from J3 or J4).
- 3) Connect the 5 pins from Arduino board to IS31FL3736B EVB:
 - a) Arduino VCC5V to IS31FL3736B EVB PVCC (Con3 or J2).
 - b) Arduino GND to IS31FL3736B EVB GND (Con3 or J1).
 - c) Arduino SDA to IS31FL3736B EVB SDA.
 - d) Arduino SCL to IS31FL3736B EVB SCL.
 - e) If Arduino use 3.3V MCU VCC, connect 3.3V to IS31FL3736B EVB VIO, if Arduino use 5.0V MCU VCC, connect 5.0V to EVB VIO.
(Arduino UNO MCU VCC is 5V, so SDB can be 5V or 3.3V)
 - 4) Use the test code in appendix I or Download the test firmware (sketch) from Lumissil website, a .txt file and copy the code to Arduino IDE and download to Arduino.
 - 5) Run the Arduino code and initial mode is change the brightness every second.
 - 6) Default 31FL3736B device address is 0xA0 (ADDR1=LOW, ADDR2=GND), if user want to change the device address, use the AD1 in Con3
 - a) AD1=VIO or PVCC, device address=0xA6.
 - b) AD1=SCL, device address=0xA2.
 - c) AD1=SDA, device address=0xA4.ADDR2 pin is fixed to GND so user can't change it.
- Please refer to the datasheet to get more information about IS31FL3736B.*

12x8 DOTS MATRIX LED DRIVER

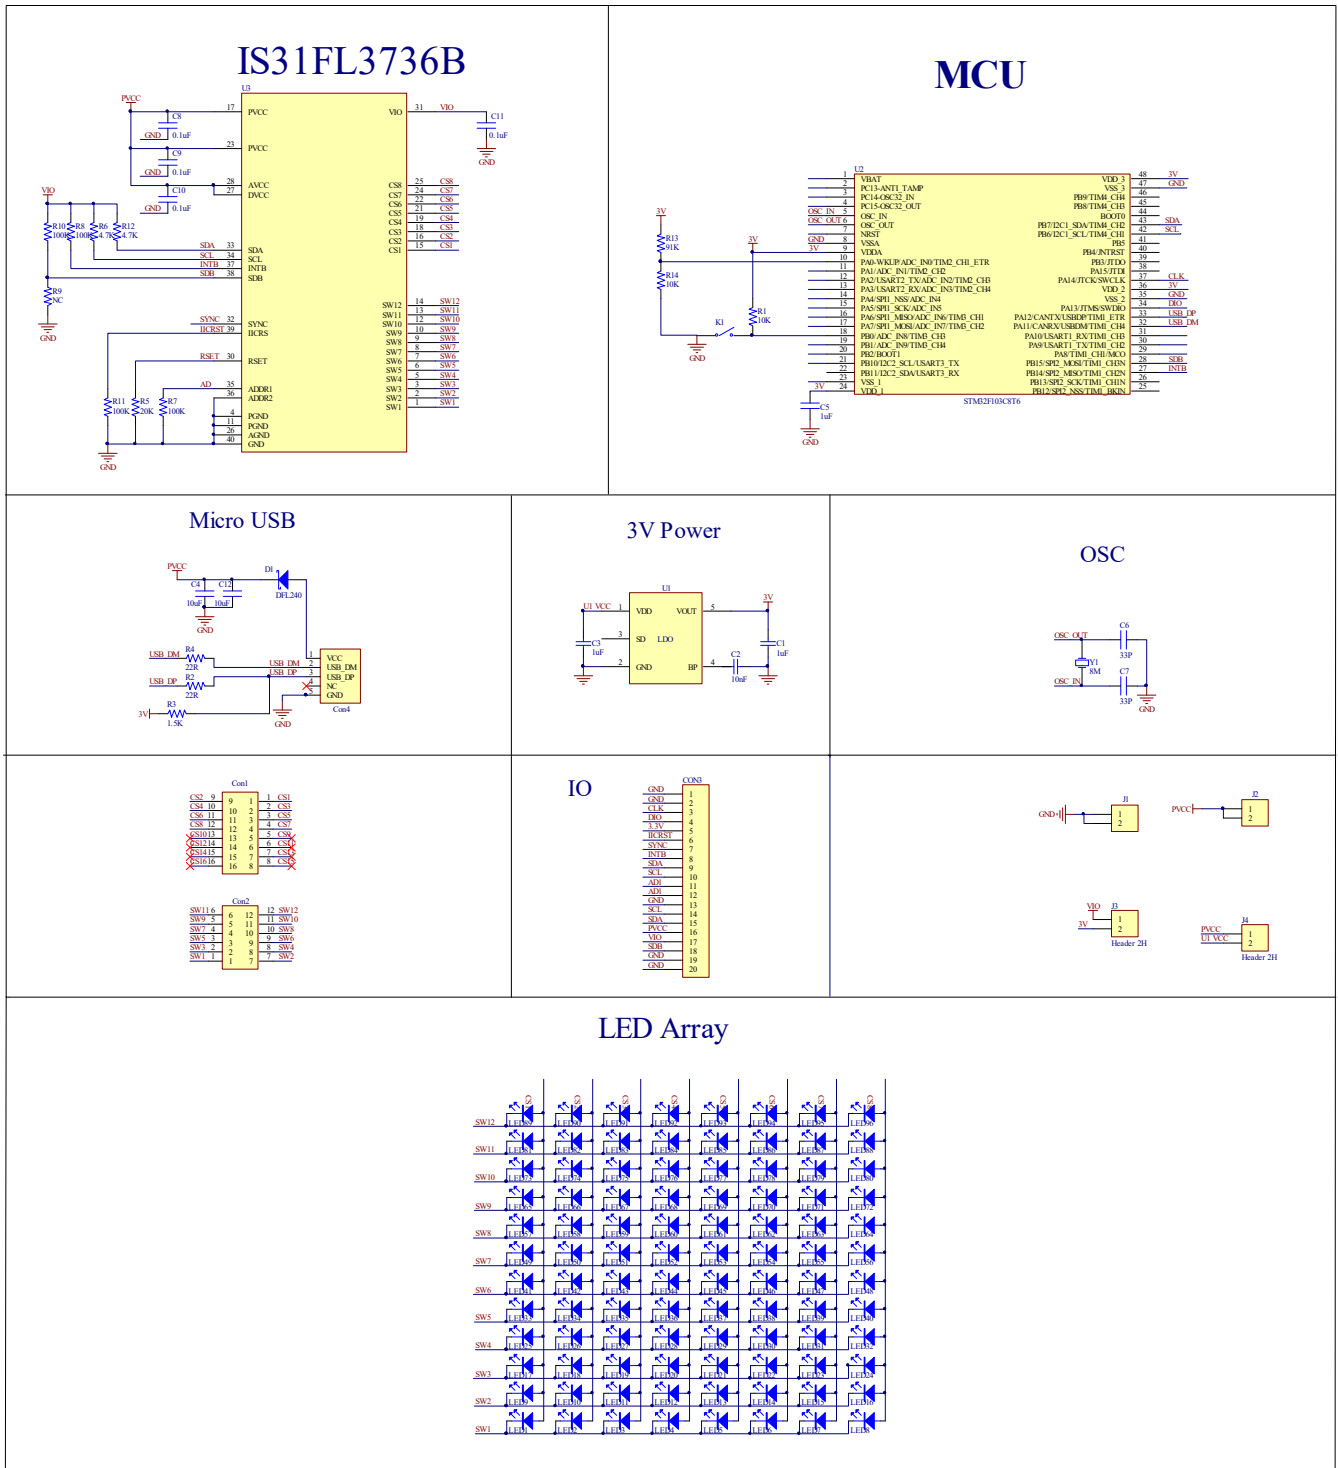


Figure 3 IS31FL3736B Application Schematic

12x8 DOTS MATRIX LED DRIVER

BILL OF MATERIALS

Name	Symbol	Description	Qty	Supplier	Part No.
LDO	U1	Reduced voltage	1	SGMICRO	SGM2019-3.3V
MCU	U2	Microcontroller	1	STM	STM32F103C8T6
LED Driver	U3	Matrix LED Driver	1	Lumissil	IS31FL3736B
LED	LED1~LED96	Blue LED, SMD	96	Everlight	9-217/BHC-ZL1M2RY/3T
Diode	D1	Diode, SMD	1	DIODES	DFLS240
Crystal	Y1	Crystal, 8MHz	1	JB	HC-49S
Resistor	R1,R14	RES,10k,1/16W,±5%,SMD	2	Yageo	RC0603JR-0710KL
Resistor	R2,R4	RES,22R,1/16W,±5%,SMD	2	Yageo	RC0603JR-0722RL
Resistor	R3	RES,1.5k,1/16W,±5%,SMD	1	Yageo	RC0603JR-071K5L
Resistor	R5	RES,20k,1/16W,±5%,SMD	1	Yageo	RC0603JR-0720KL
Resistor	R6,R12	RES,1k,1/16W,±5%,SMD	2	Yageo	RC0603JR-0701KL
Resistor	R7,R8,R10,R11	RES,100k,1/16W,±5%,SMD	4	Yageo	RC0603JR-07100KL
Resistor	R9	NC	0		
Resistor	R13	RES,91k,1/16W,±5%,SMD	1	Yageo	RC0603JR-07910KL
Capacitor	C1,C3,C5	CAP,1µF,16V,±20%,SMD	3	Yageo	CC0603KKX7R9BB105
Capacitor	C2	CAP,10pF,16V,±20%,SMD	1	Yageo	CC0603KKX7R9BB100
Capacitor	C4,C12	CAP,10µF,16V, ±20%,SMD	2	Yageo	CC0603KKX7R9BB106
Capacitor	C6,C7	CAP,33pF,16V,±20%,SMD	2	Yageo	CC0603KKX7R9BB330
Capacitor	C8,C9,C10,C11	CAP,0.1µF,16V,±20%,SMD	3	Yageo	CC0603KKX7R9BB104
Button	K1	Button	1		

Bill of Materials, refer to Figure 3 above.

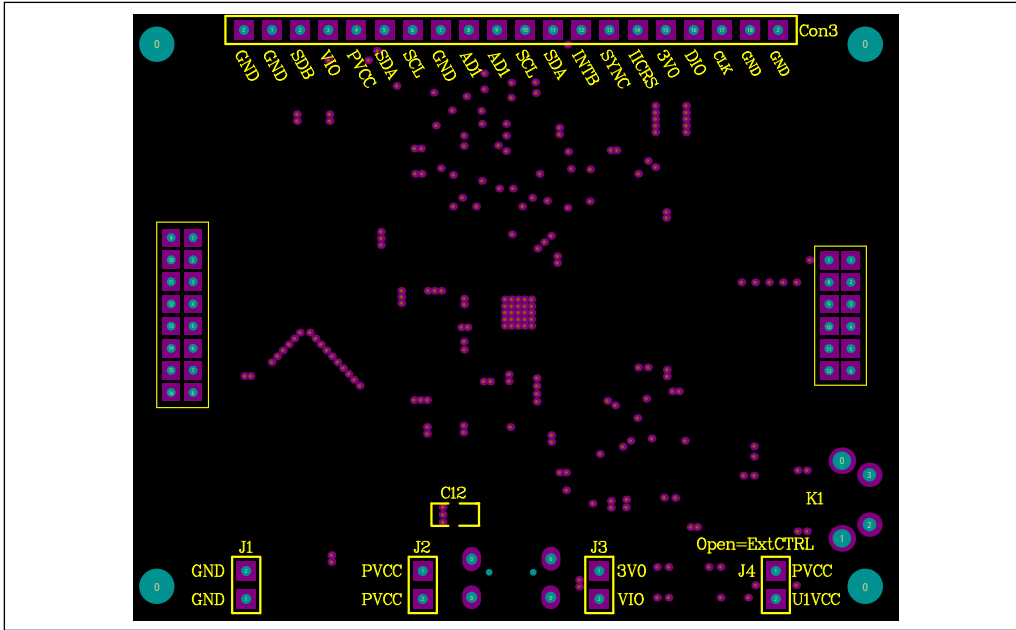


Figure 4 Board Component Placement Guide - Top Layer

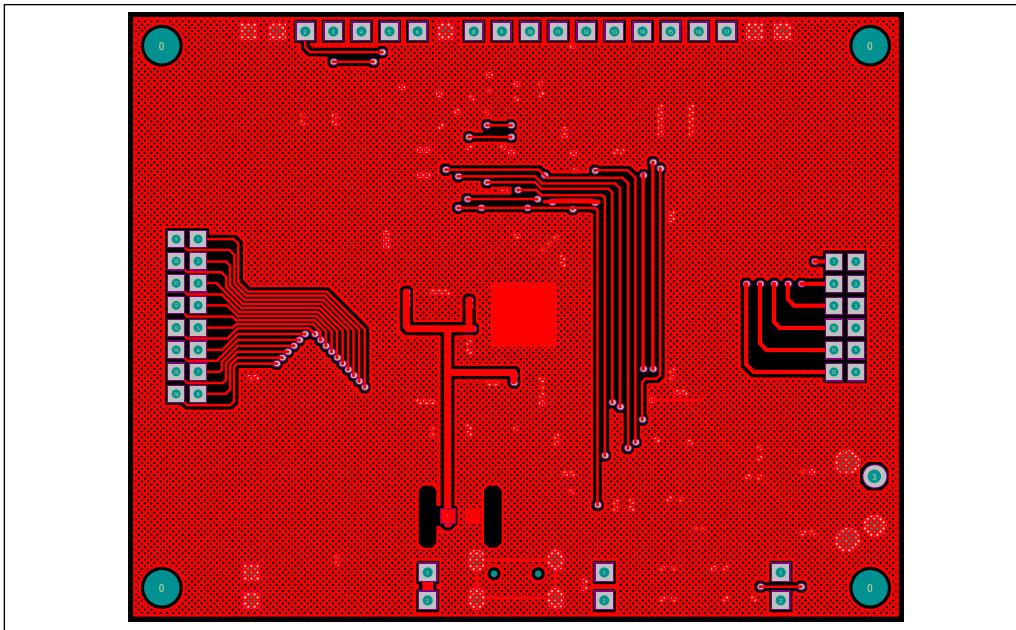


Figure 5 Board PCB Layout - Top Layer

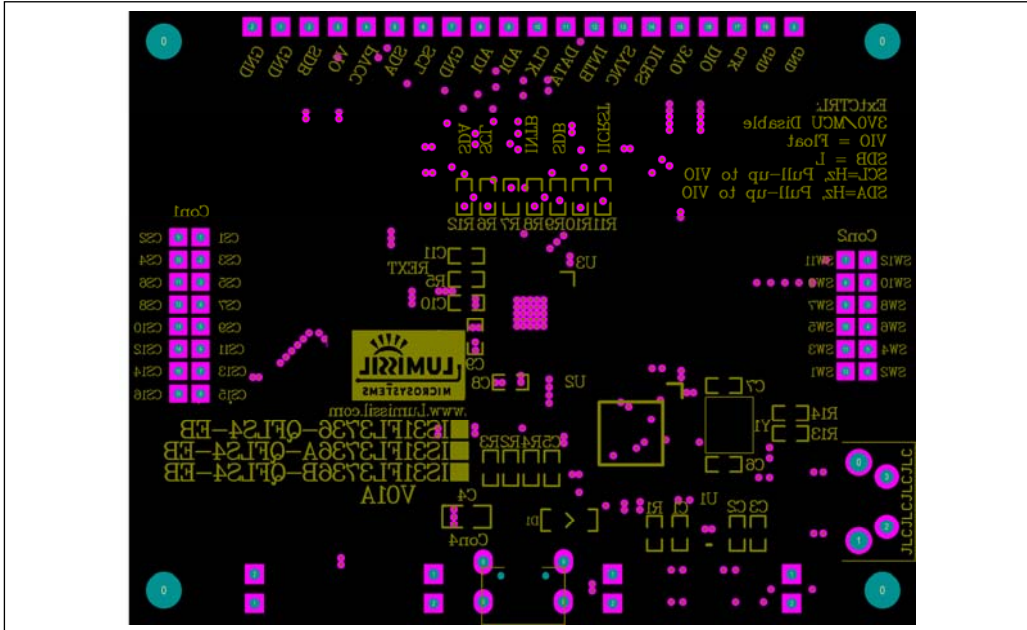


Figure 6 Board Component Placement Guide - Bottom Layer

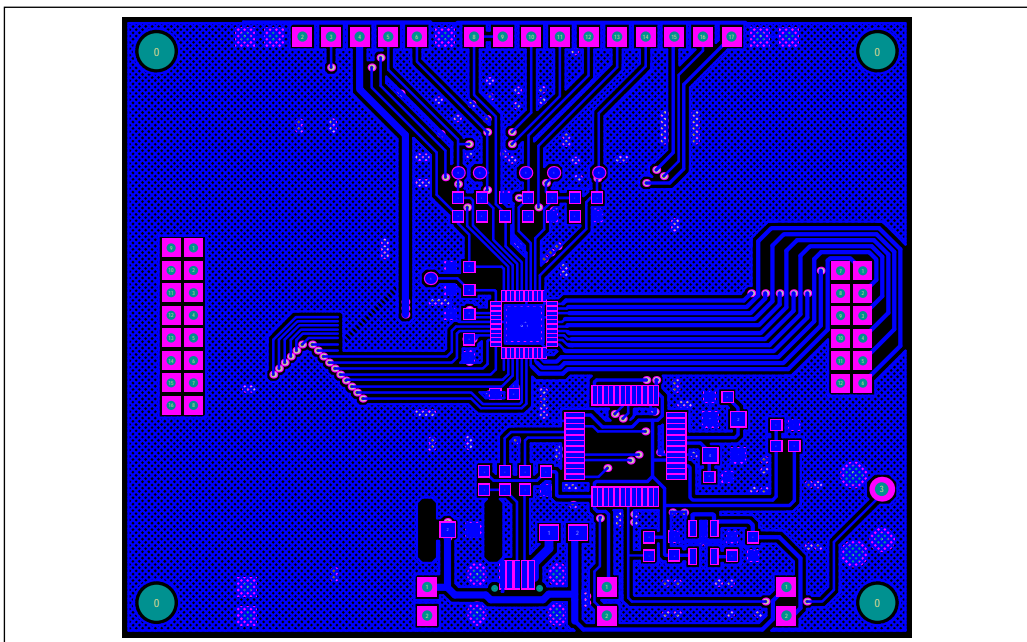


Figure 7 Board PCB Layout - Bottom Layer



Figure 8 LED Board Component Placement Guide - Top Layer

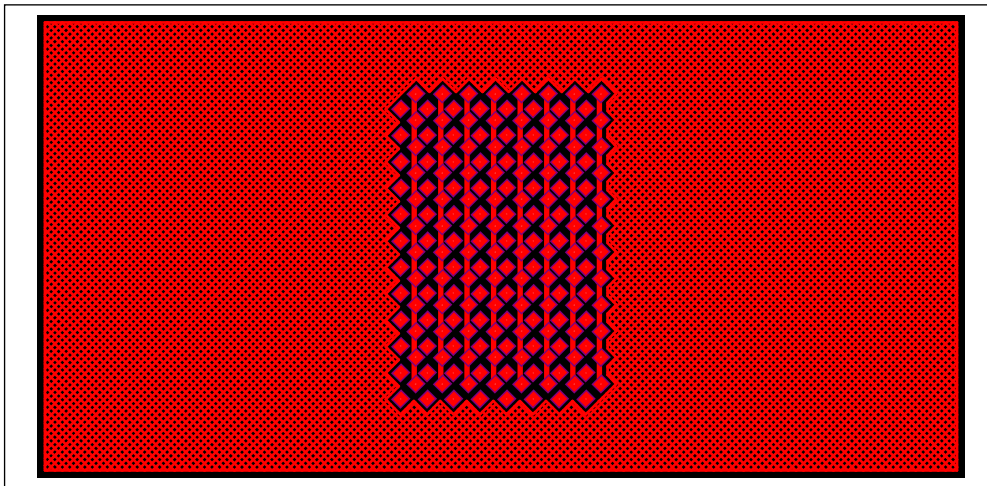


Figure 9 LED Board PCB Layout - Top Layer



Figure 10 LED Board Component Placement Guide - Bottom Layer

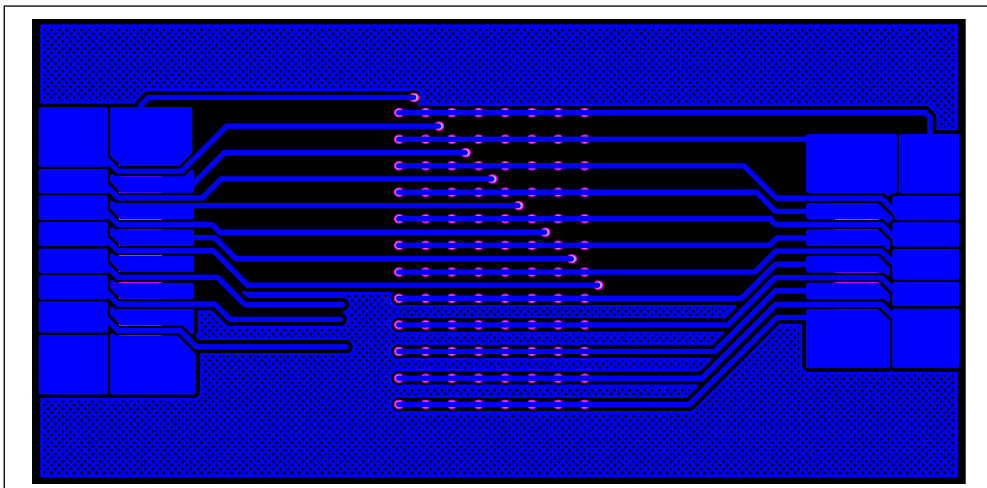


Figure 11 LED Board PCB Layout - Bottom Layer

Copyright © 2025 Lumissil Microsystems. All rights reserved. Lumissil Microsystems reserves the right to make changes to this specification and its products at any time without notice. Lumissil Microsystems assumes no liability arising out of the application or use of any information, products or services described herein. Customers are advised to obtain the latest version of this device specification before relying on any published information and before placing orders for products.

Lumissil Microsystems does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless Lumissil Microsystems receives written assurance to its satisfaction, that:

- a.) the risk of injury or damage has been minimized;
- b.) the user assume all such risks; and
- c.) potential liability of Lumissil Microsystems is adequately protected under the circumstances



REVISION HISTORY

Revision	Detail Information	Date
A	Initial release	2019.10.16
B	Update to new Lumissil logo and add RoHS	2025.11.12

12×8 DOTS MATRIX LED DRIVER

APPENDIX I : IS31FL3736B Arduino Test Code V01A

```
#include<Wire.h>
#include<avr/pgmspace.h>
#define Addr_GND_GND 0xa0//AD1 open (R7 pull-low), ADDR2=GND
#define Addr_GND_VCC 0xa6//AD1 = VIO, ADDR2=GND
#define Addr_GND_SCL 0xa2//AD1 = SCL, ADDR2=GND
#define Addr_GND_SDA 0xa4//AD1 = SDA, ADDR2=GND

void setup()
{
  Wire.begin();
  Wire.setClock(800000);//I2C 800kHz
  IS31FL3736B_init();
}

void loop()
{
  IS31FL3736B_Test_mode1();//breath mode
}

void IS_IIC_WriteByte(uint8_t Dev_Add,uint8_t Reg_Add,uint8_t Reg_Dat)
{
  Wire.beginTransmission(Dev_Add/2); // transmit to device address
  Wire.write(Reg_Add); // sends register address
  Wire.write(Reg_Dat); // sends register data
  Wire.endTransmission(); // stop transmitting
}

void IS31FL3736B_init(void)//white LED
{
  uint8_t i;
  IS_IIC_WriteByte(Addr_GND_GND,0xFE,0xc5);//Unlock FDh
  IS_IIC_WriteByte(Addr_GND_GND,0xFD,0x03);//Turn to page 3: function registers
  IS_IIC_WriteByte(Addr_GND_GND,0x00,0x00);//Enable software shutdown

  IS_IIC_WriteByte(Addr_GND_GND,0xFE,0xc5);//Unlock FDh
  IS_IIC_WriteByte(Addr_GND_GND,0xFD,0x00);// Turn to page 0: control registers
  for(i=0;i<0x18;i+=1)IS_IIC_WriteByte(Addr_GND_GND,i,0xff);//open all LED
  //can use buffer write type as figure 7 in datasheet

  IS_IIC_WriteByte(Addr_GND_GND,0xFE,0xc5);//unlock FDh
  IS_IIC_WriteByte(Addr_GND_GND,0xFD,0x01);//Turn to page 1: PWM registers
  for(i=0;i<192;i++)IS_IIC_WriteByte(Addr_GND_GND,i,0x00);//Set PWM data to 0
  //can use buffer write type as figure 7 in datasheet
```

12x8 DOTS MATRIX LED DRIVER

```
IS_IIC_WriteByte(Addr_GND_GND,0xFE,0xc5);//unlock FDh
IS_IIC_WriteByte(Addr_GND_GND,0xFD,0x03);//Turn to page 3: function registers
IS_IIC_WriteByte(Addr_GND_GND,0x00,0x01);//Release software shutdown to normal operation
IS_IIC_WriteByte(Addr_GND_GND,0x01,0xff);//global current
}

void IS31FL3736B_Test_mode1(void)//white LED
{
    uint8_t i;
    while(1)
    {
        IS_IIC_WriteByte(Addr_GND_GND,0xFE,0xc5);//unlock FDh
        IS_IIC_WriteByte(Addr_GND_GND,0xFD,0x01);//Turn to page 1: PWM registers
        for(i=0;i<192;i++)IS_IIC_WriteByte(Addr_GND_GND,i,0x10);//update all PWM with 0x10
        delay(1000);           // wait for a second

        IS_IIC_WriteByte(Addr_GND_GND,0xFE,0xc5);//unlock FDh
        IS_IIC_WriteByte(Addr_GND_GND,0xFD,0x01);//Turn to page 1: PWM registers
        for(i=0;i<192;i++)IS_IIC_WriteByte(Addr_GND_GND,i,0x80); //update all PWM with 0x80
        delay(1000);           // wait for a second
    }
}
```