



Image for illustrative purpose only

Summary

[Request a quote](#)

[unipole multipole](#)

Number of contacts Low Voltage	14
Wire Size/AWG	32 - 24
Socket / Receptacle	Socket / Receptacle - Fixed Panel Front Mounted
Locking system	Push-pull
Size	2C
Suggested matching part	FFA.2C.314.CLAC62

Technical details

Electrical Configuration

Number of contacts Low Voltage	14
Contact Termination Low voltage	Solder
R (max)	6.1 mOhm
Insert configuration value	2C.314 - 14 Low Voltage
Insulator	L: PEEK (UL 94 / V-0/1.5)
Rated current	5 A
Vtest	600 V (AC), 900 V (DC)
Max. Solid Conductor	0.25 mm ² (AWG 24)
Max. Stranded Conductor	0.14 mm ² (AWG 26)
Bucket Dia.	0.6 mm (0.024in)
Contact Dia.	0.7 mm (0.028in)
Wire Size/AWG	32 - 24

Form & Material

Shell style / Model id	ERY - Fixed receptacle, protruding shell (screw fixing on the panel)
Socket / Receptacle	Fixed Panel Front Mounted
Housing material	Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces
Locking system	Push-pull
Keying	Hermaphroditic keying (half moon insert) with female pin 1
Weight	5.48 g


Environment

Environmental sealing (IP rating)	IP50
Endurance	500 mating cycles
Salt Spray Corrosion	>1000 hr

https://www.lemo.com/int_en/ery-2c-314-cll.html

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Drawings

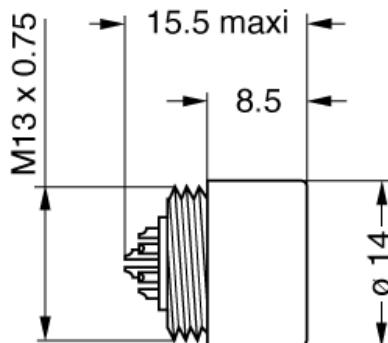

Dimensions

A	L	e
mm.	14	15.6
in.	0.55	0.61

Cables

Cable PartNumber	Material	Colour	Cable image
CMN.14.T28.056PGZE		grey	
CMN.14.T28.056PNZE			
CMN.14.T28.056QGZE	TPR (medical)	Grey	
114260	PTFE	White	
214140	PVC	Black	
214240	PTFE	White	
314250	PVC	Grey	