

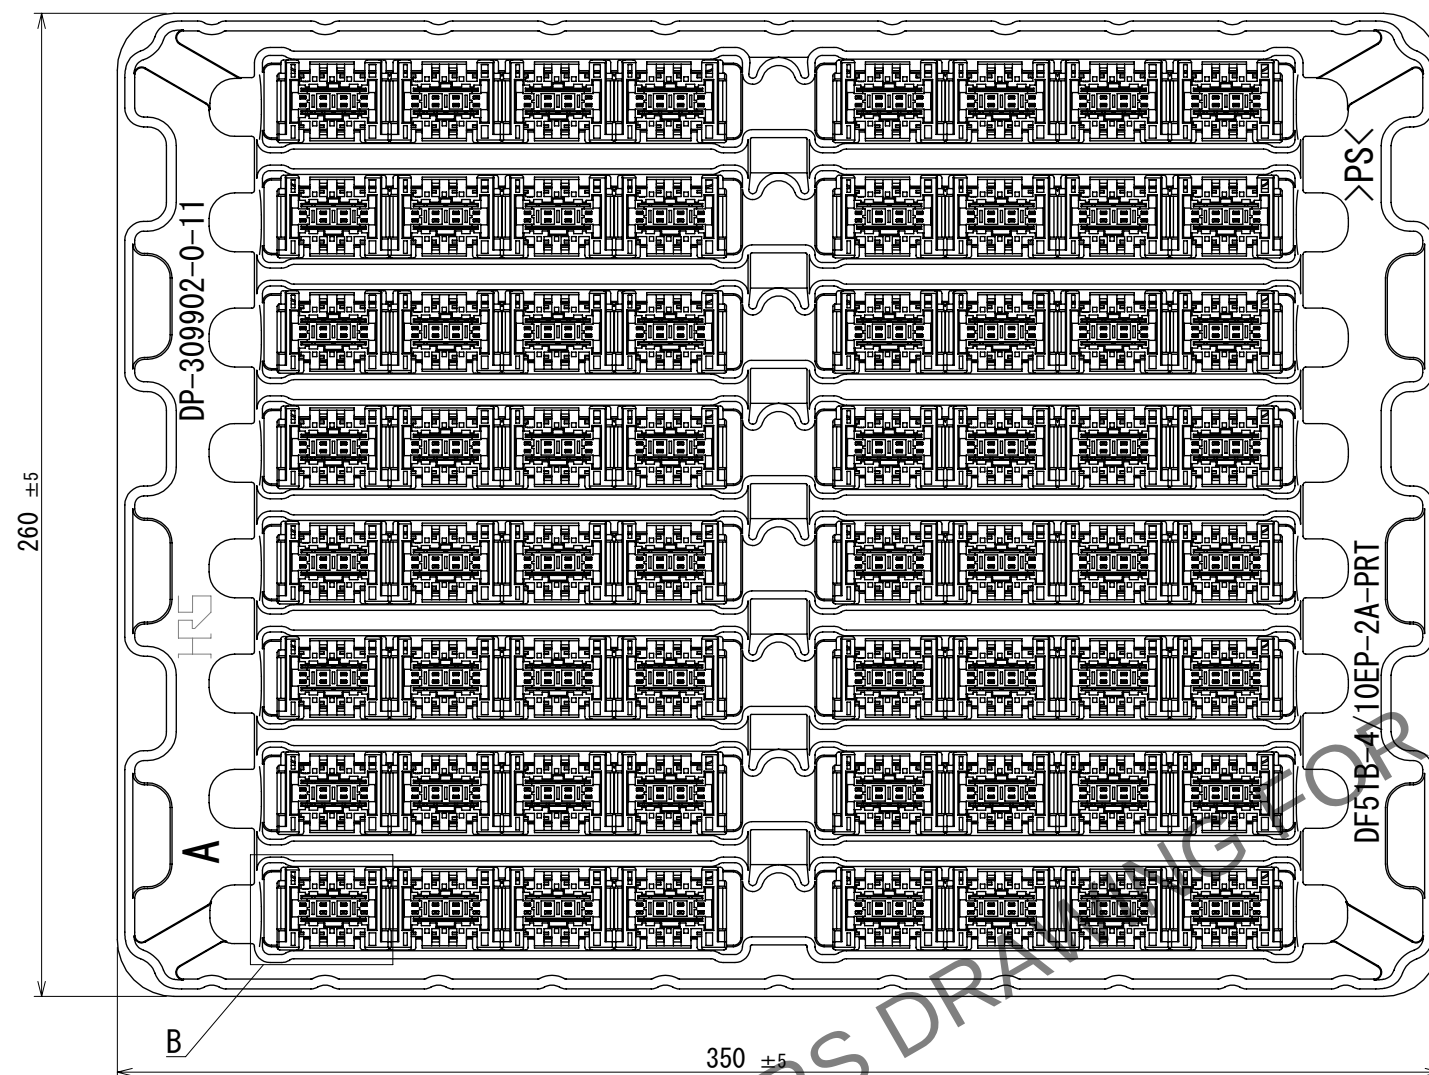


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Packing diagram

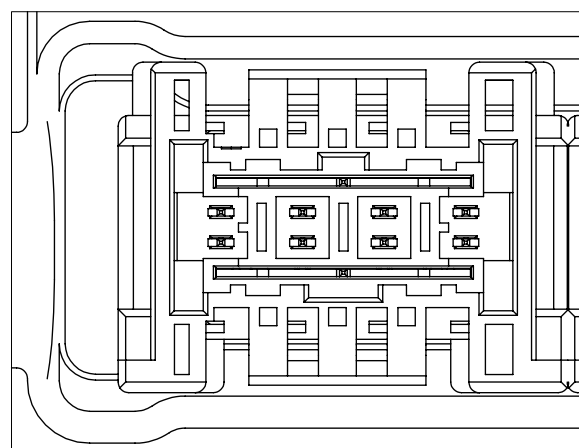

Mating diagram

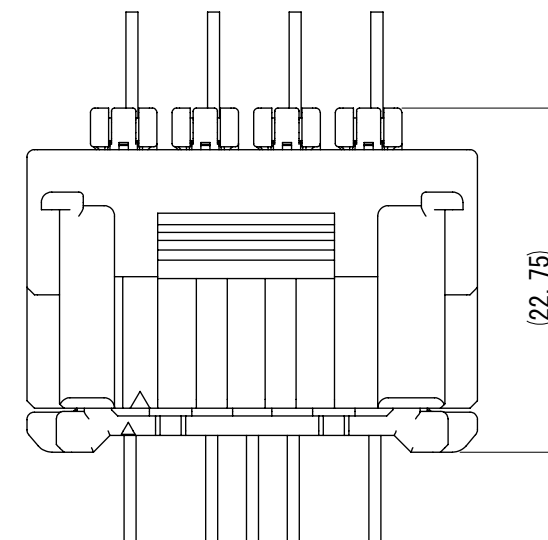

- Note 1. 256 pieces per box $\triangle$
- $\triangle$ 2 Use a surface that is free from dripping R on the panel hook.
 - $\triangle$ 3 Applicable panel thickness is 0.5mm to 2.3mm.
 - 4. Refer to these manuals for handling this connector.
Cable assembly : ATAD-H0923-00
Mating and unmating operation : ATAD-H0847-00
 - 5. There may be slight scratches or dents on the appearance, but this does not affect the function.
 - 6. UL (File No.E52653)
C-UL (File No.E52653) authorization article



- $\triangle$ 8. Please refer to the technical specification (ETAP-H1063-01) for the packing type.

HRS

DRAWING NO.	EDC-405052-00-00
PART NO.	DF51B-4/10EP-2A-4PRT
CODE NO.	CL0543-5137-0-00