
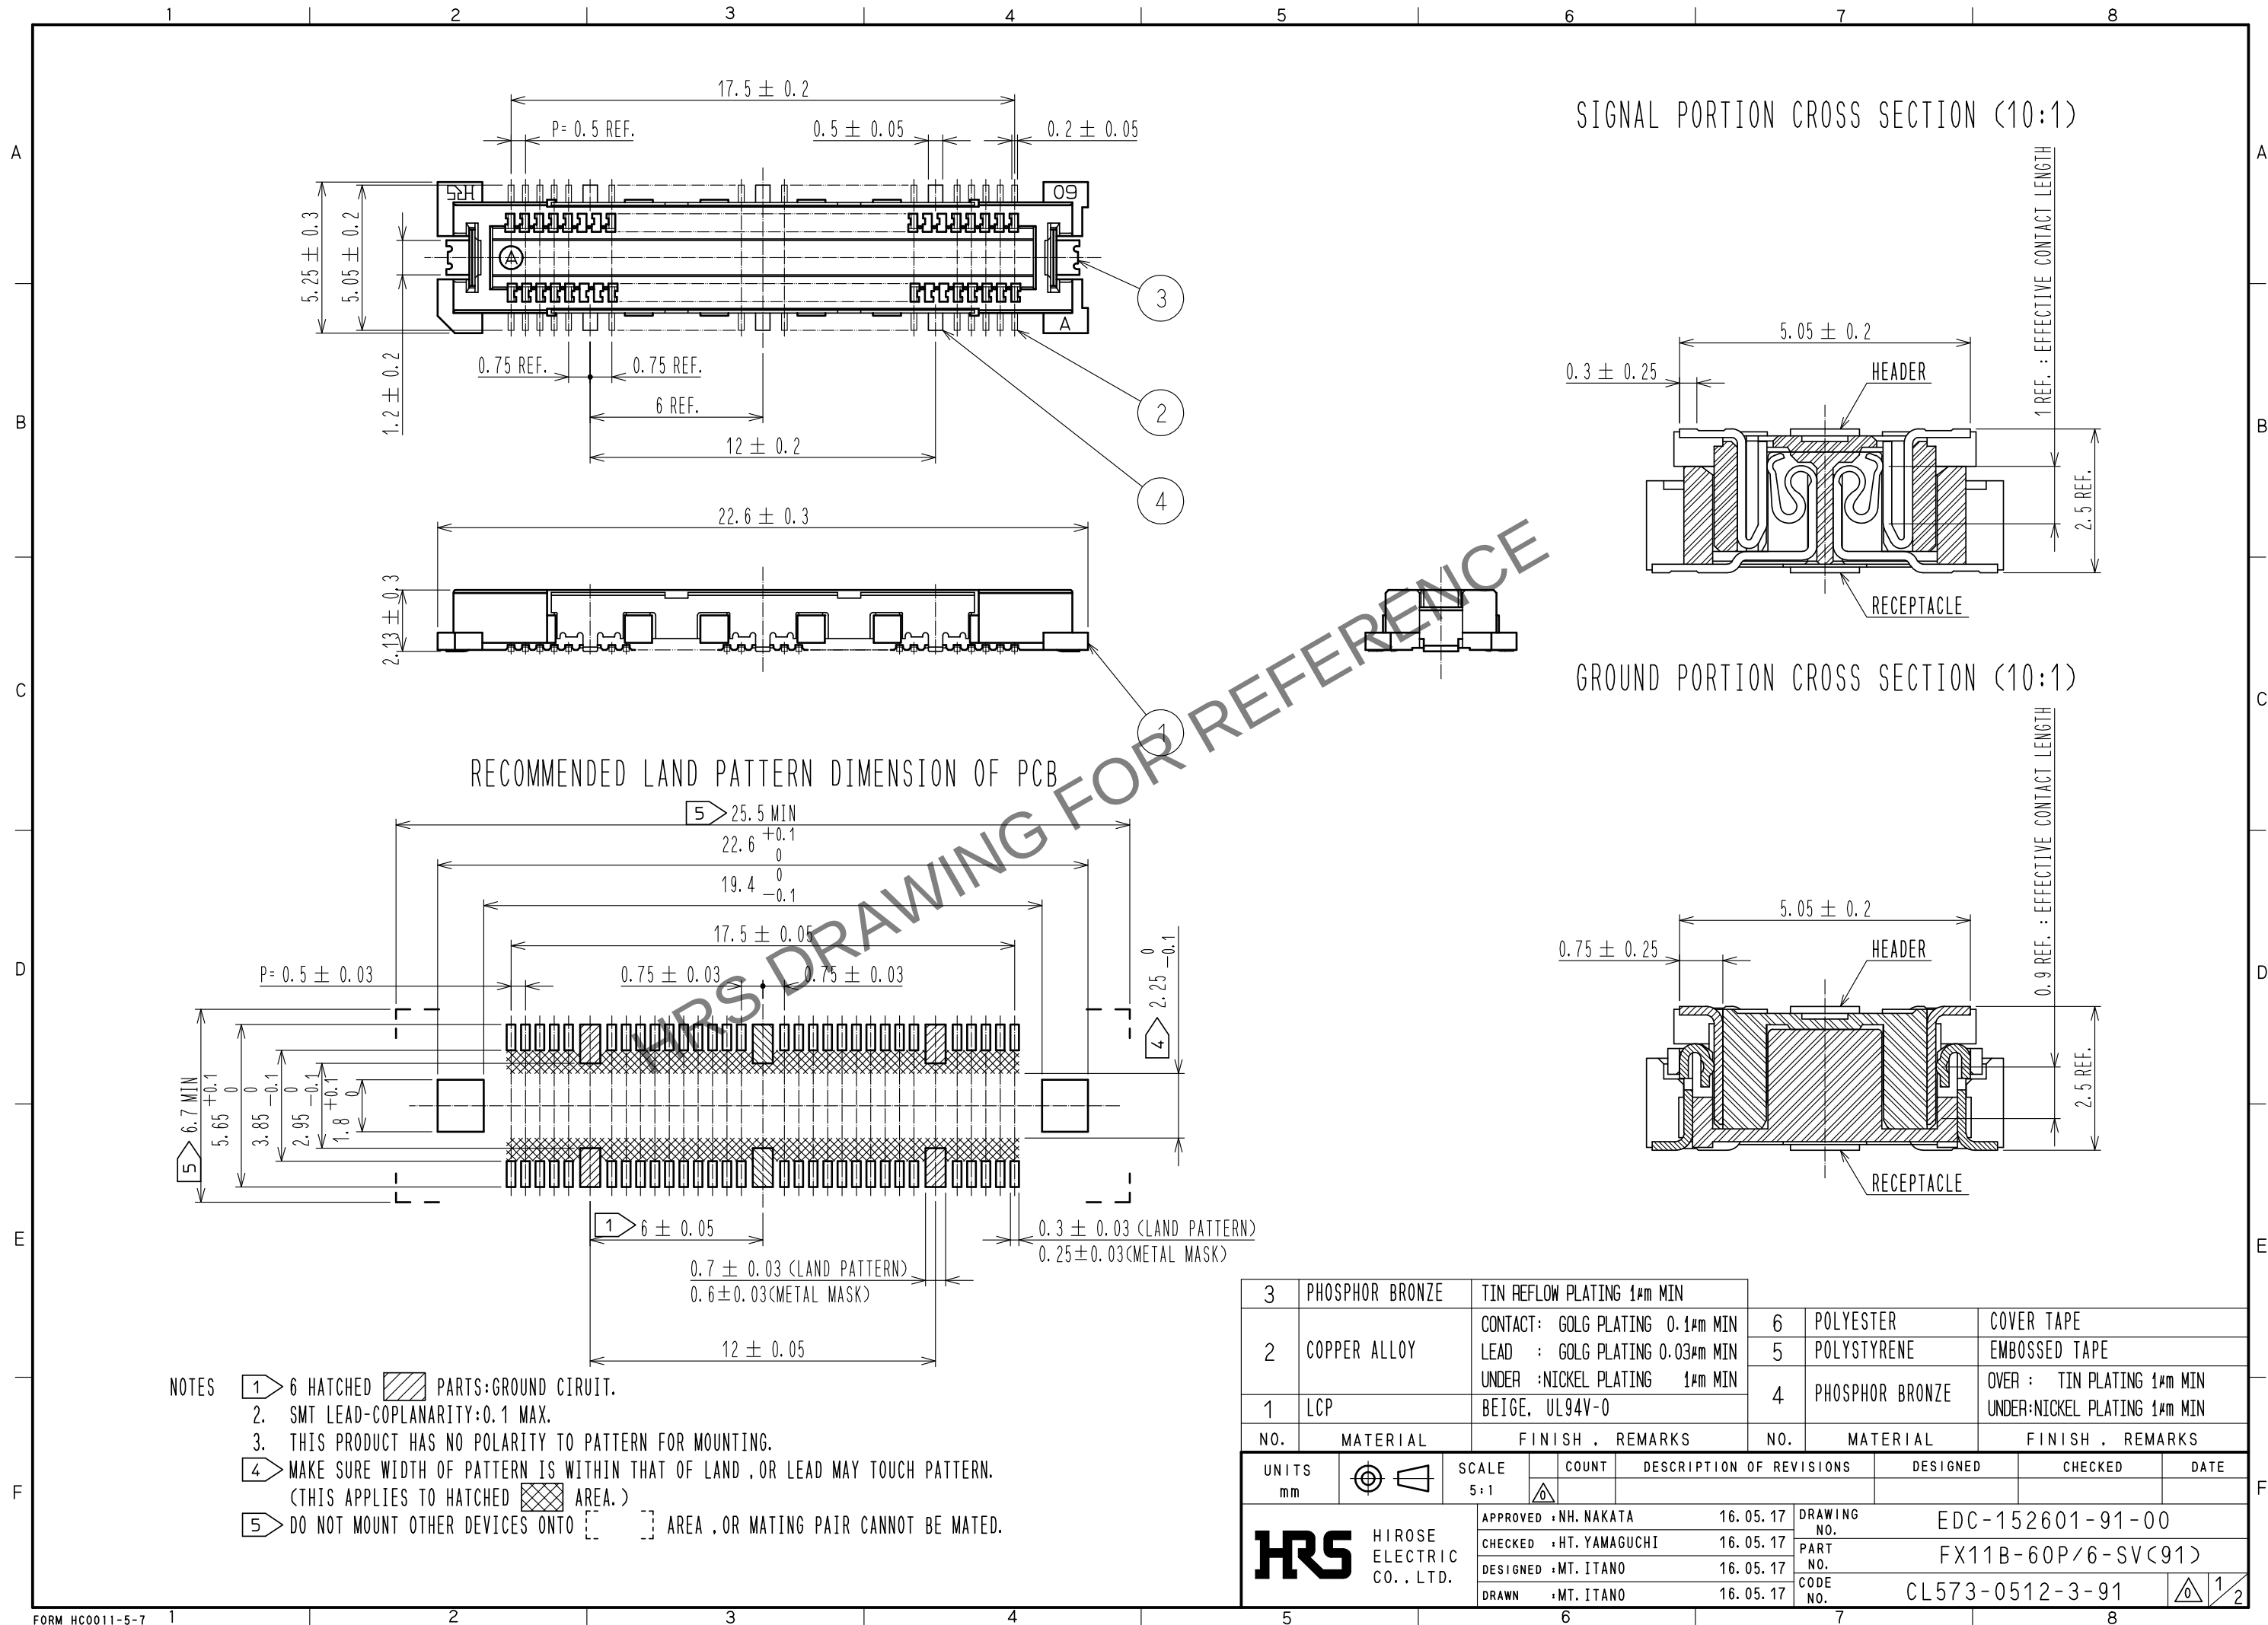


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.




3	PHOSPHOR BRONZE	TIN REFLOW PLATING 1μm MIN										
2	COPPER ALLOY	CONTACT: GOLG PLATING 0.1μm MIN		6	POLYESTER	COVER TAPE						
		LEAD : GOLG PLATING 0.03μm MIN		5	POLYSTYRENE	EMBOSSED TAPE						
		UNDER :NICKEL PLATING 1μm MIN		4	PHOSPHOR BRONZE	OVER : TIN PLATING 1μm MIN UNDER:NICKEL PLATING 1μm MIN						
1	LCP	BEIGE, UL94V-0										
NO.		MATERIAL		FINISH , REMARKS		NO.		MATERIAL		FINISH , REMARKS		
UNITS mm				SCALE 5:1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED		CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.				APPROVED :NH. NAKATA		16. 05. 17	DRAWING NO.		EDC-152601-91-00			
				CHECKED :HT. YAMAGUCHI		16. 05. 17	PART NO.		FX11B-60P/6-SV<91>			
				DESIGNED :MT. ITANO		16. 05. 17	CODE NO.		CL573-0512-3-91			
				DRAWN :MT. ITANO		16. 05. 17			 1/2			

Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

DRAWING FOR PACKING(2:1)

THE DIRECTION OF PULLING OUT →

REELED DIMENSION(FREE)

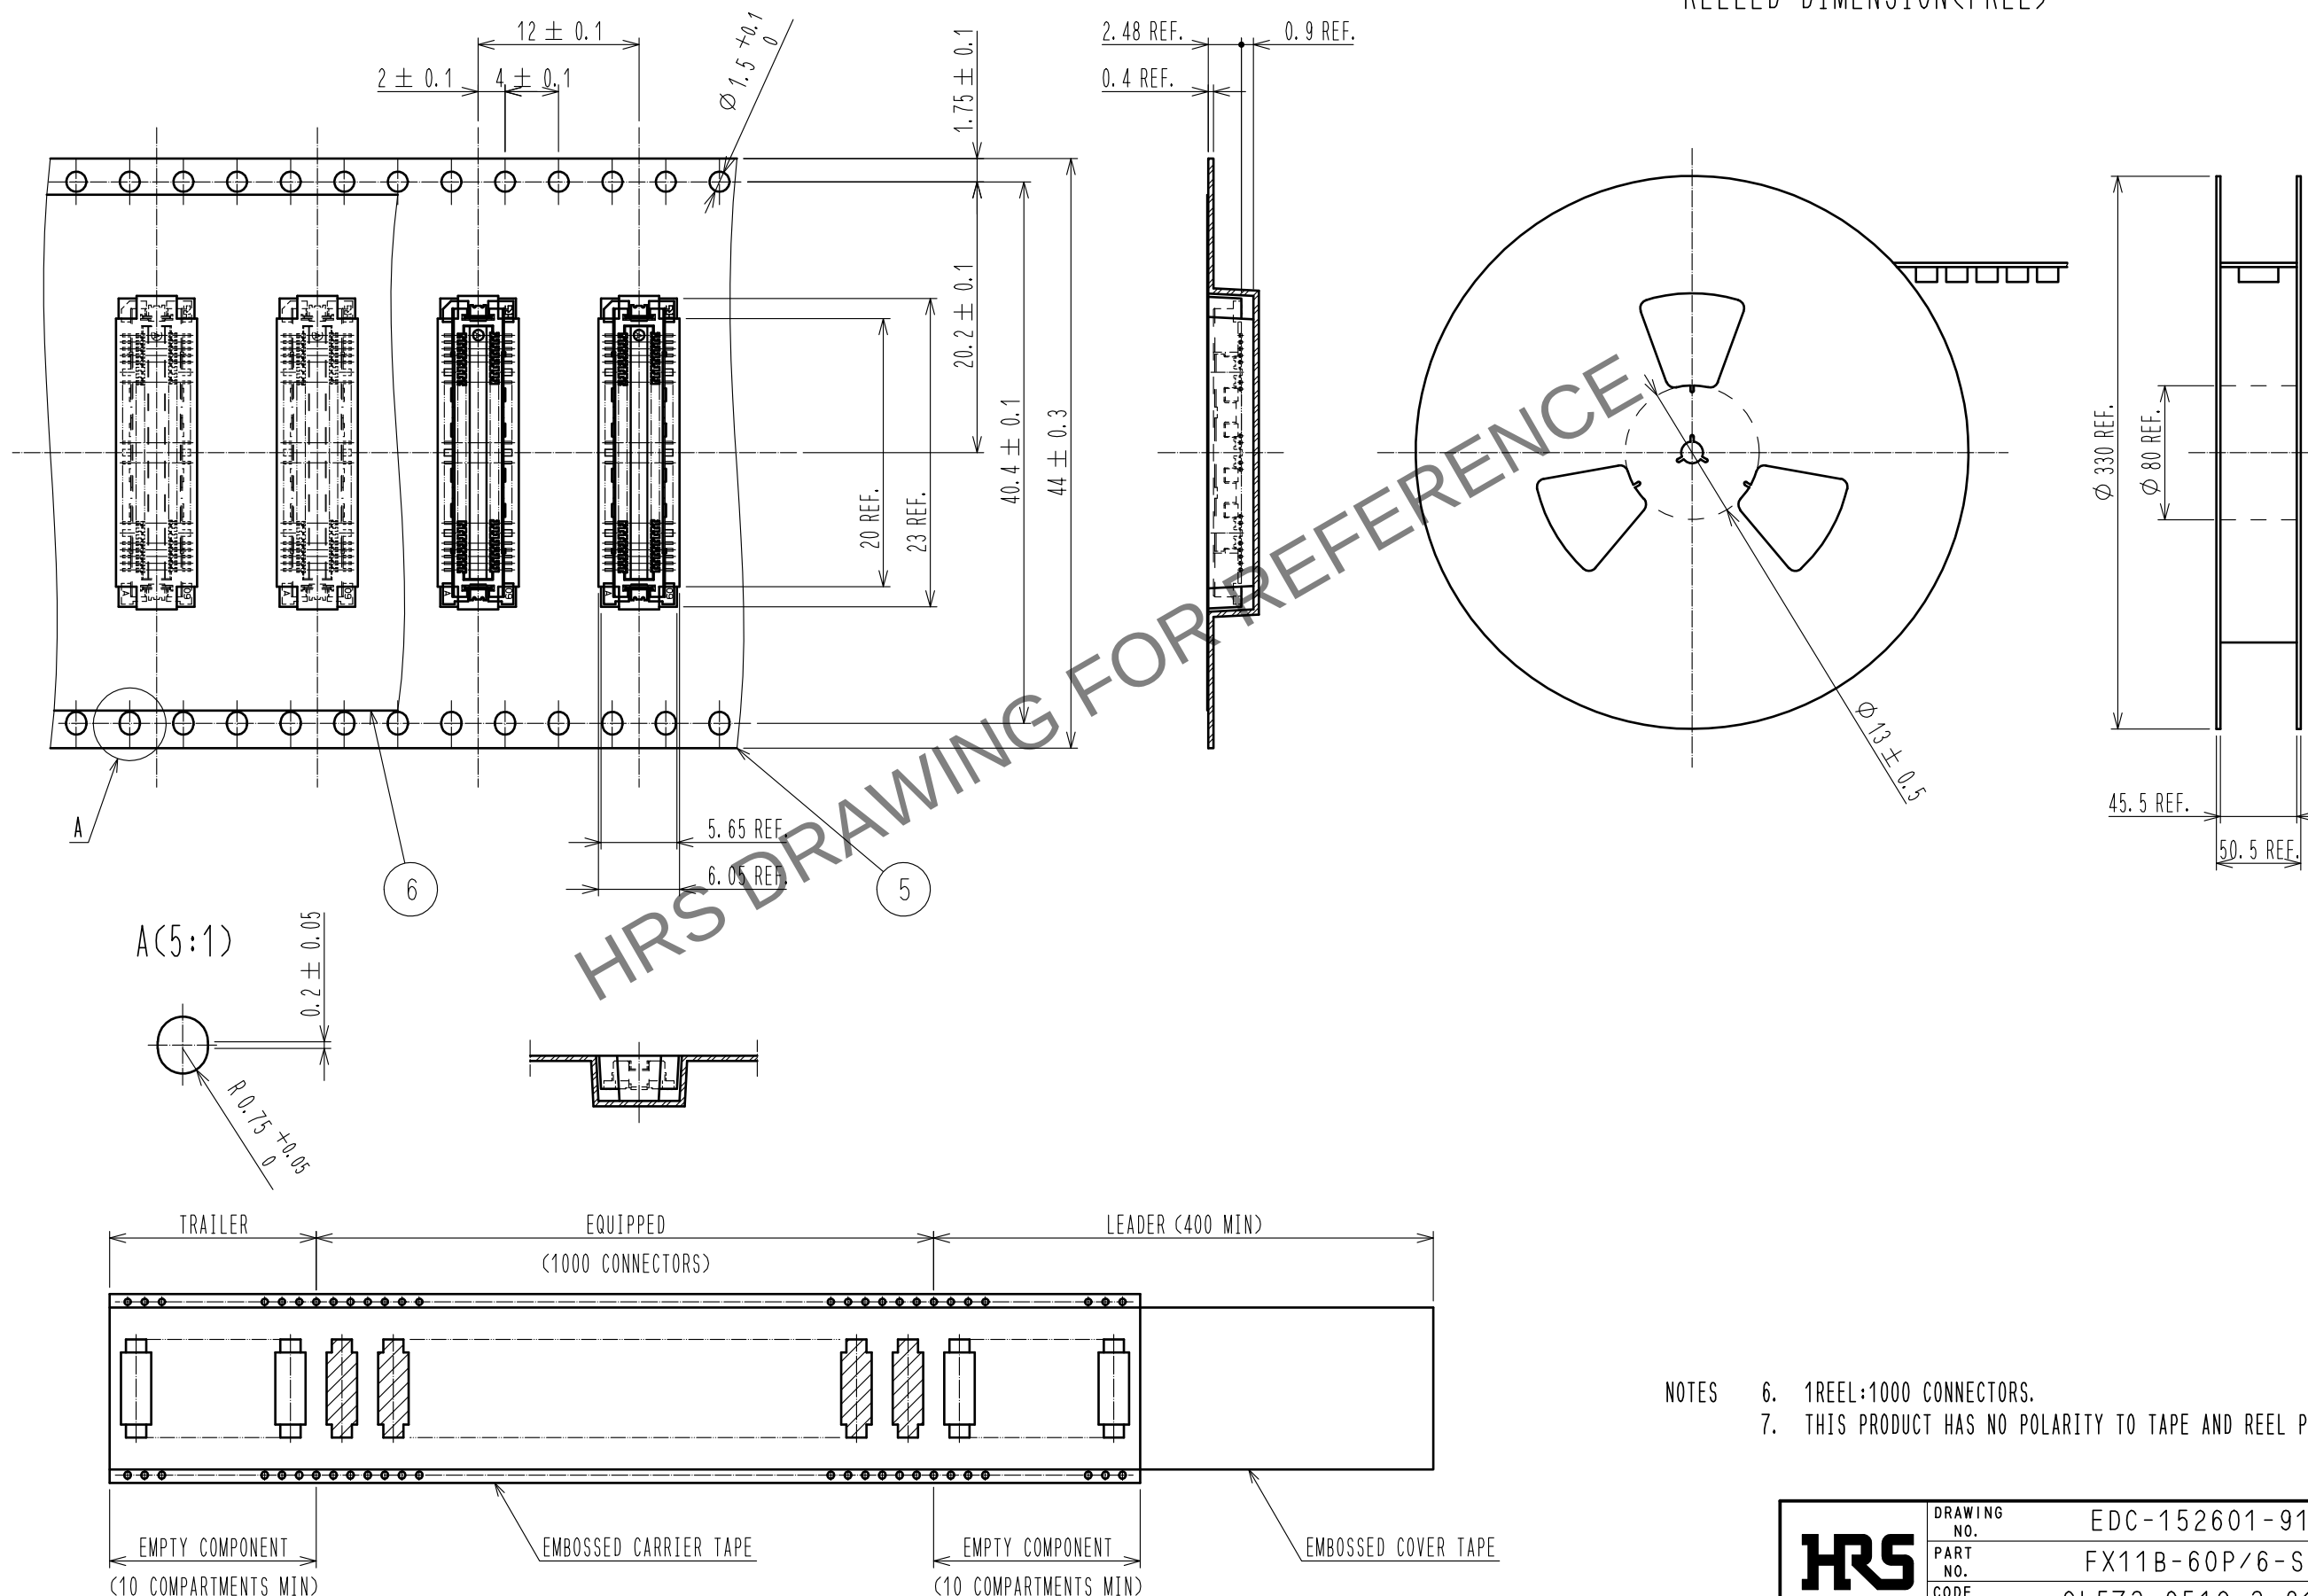

- NOTES
- 1REEL:1000 CONNECTORS.
 - THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.

HRS

DRAWING NO.	EDC-152601-91-00
PART NO.	FX11B-60P/6-SV(91)
CODE NO.	CL573-0512-3-91

2/2