

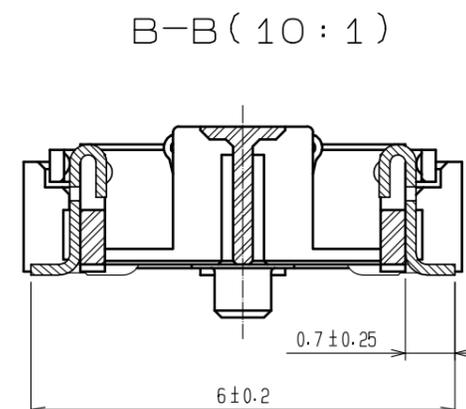
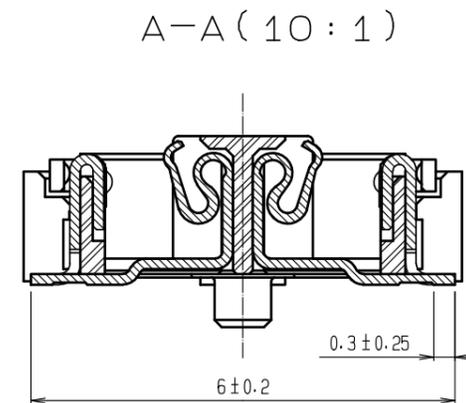


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

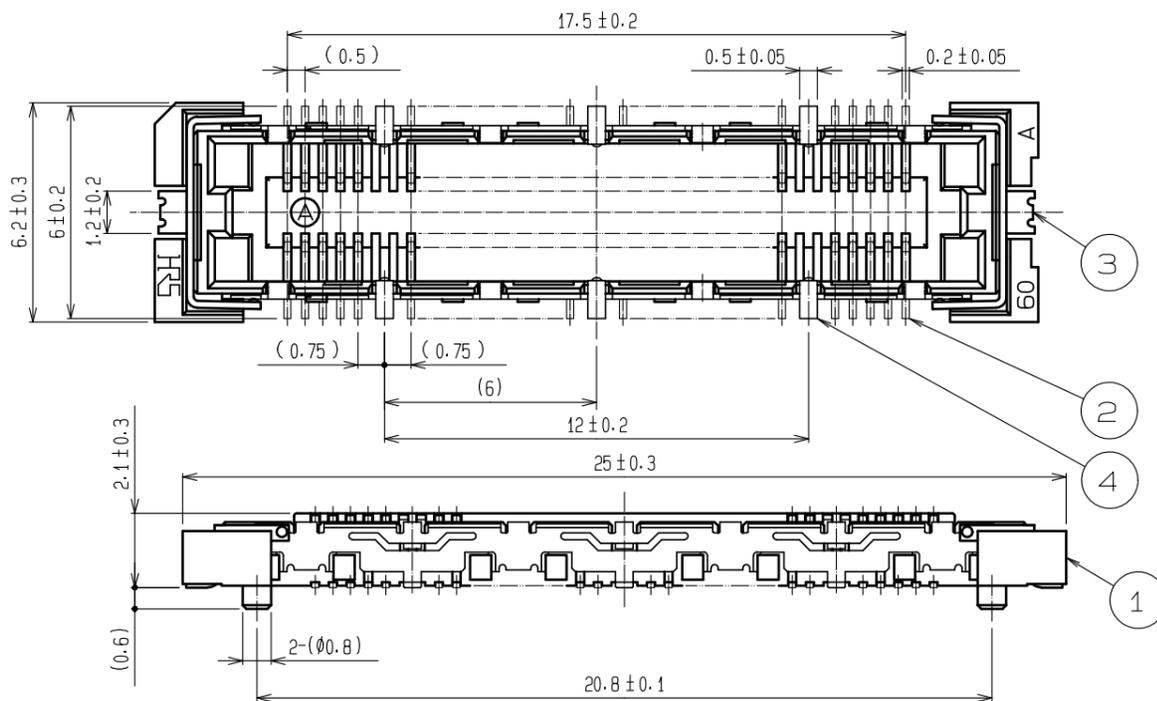

RECOMMENDED LAND PATTERN DIMENSION OF PCB
 (RECOMMENDED METAL MASK THICKNESS: 0.15mm)

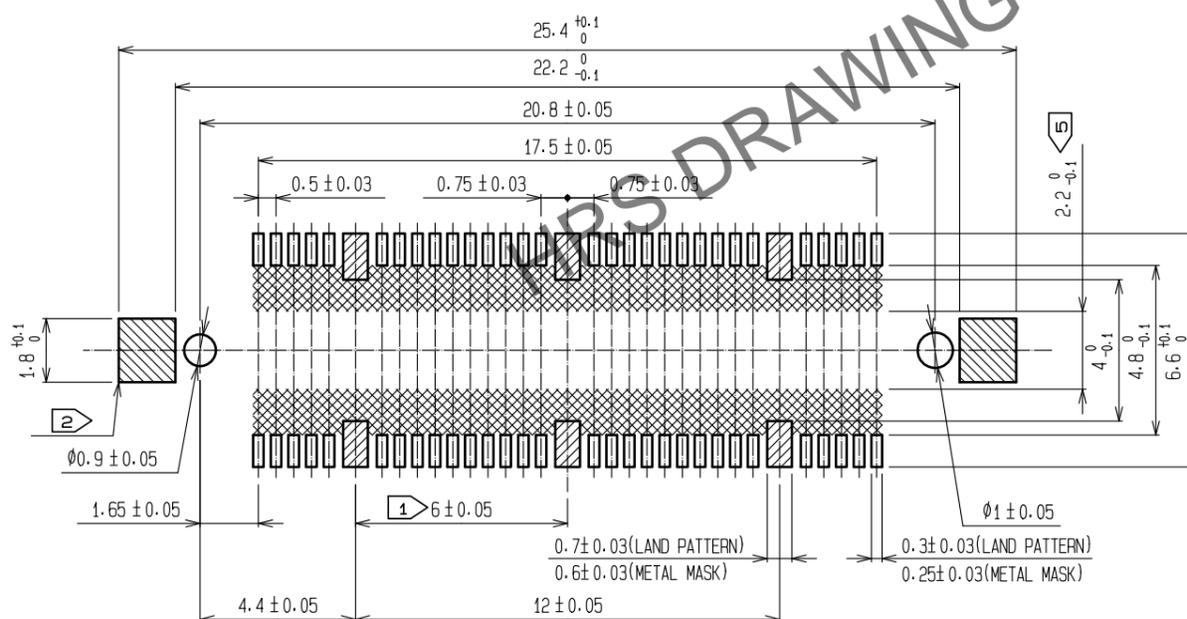

- NOTES
- 1 6 HATCHED PARTS: GROUND CIRCUIT.
 - 2 2 HATCHED PARTS: GROUND CIRCUIT.
 - 3 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 4 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 5 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND .OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 6 TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.
 - 7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.


NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS
3	Phosphor bronze	Tin reflow plating 1μm MIN		6	PET		Top cover tape
2	Phosphor bronze	Contact: Gold plating 0.1μm MIN		5	PET		Embossed carrier tape
		Lead : Gold plating 0.03μm MIN Under : Nickel plating 1μm MIN		4	Phosphor bronze		Surface: Tin plating 1μm MIN Under : Nickel plating 1μm MIN
1	LCP	Beige, UL94V-0					

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5:1	1	DIS-F-00005925	MT. ITANO	HT. YAMAGUCHI	20200306

APPROVED	CHECKED	DESIGNED	DRAWN	DRAWING NO.	PART NO.	CODE NO.
HS. OKAWA	HT. YAMAGUCHI	SY. KAMIGA	HK. SUNADORI	20081106	20081106	20081105
				EDC-152632-91-21	FX11A-60S/6-SV(91)	CL573-0702-9-91

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

DRAWING FOR PACKING(2:1)

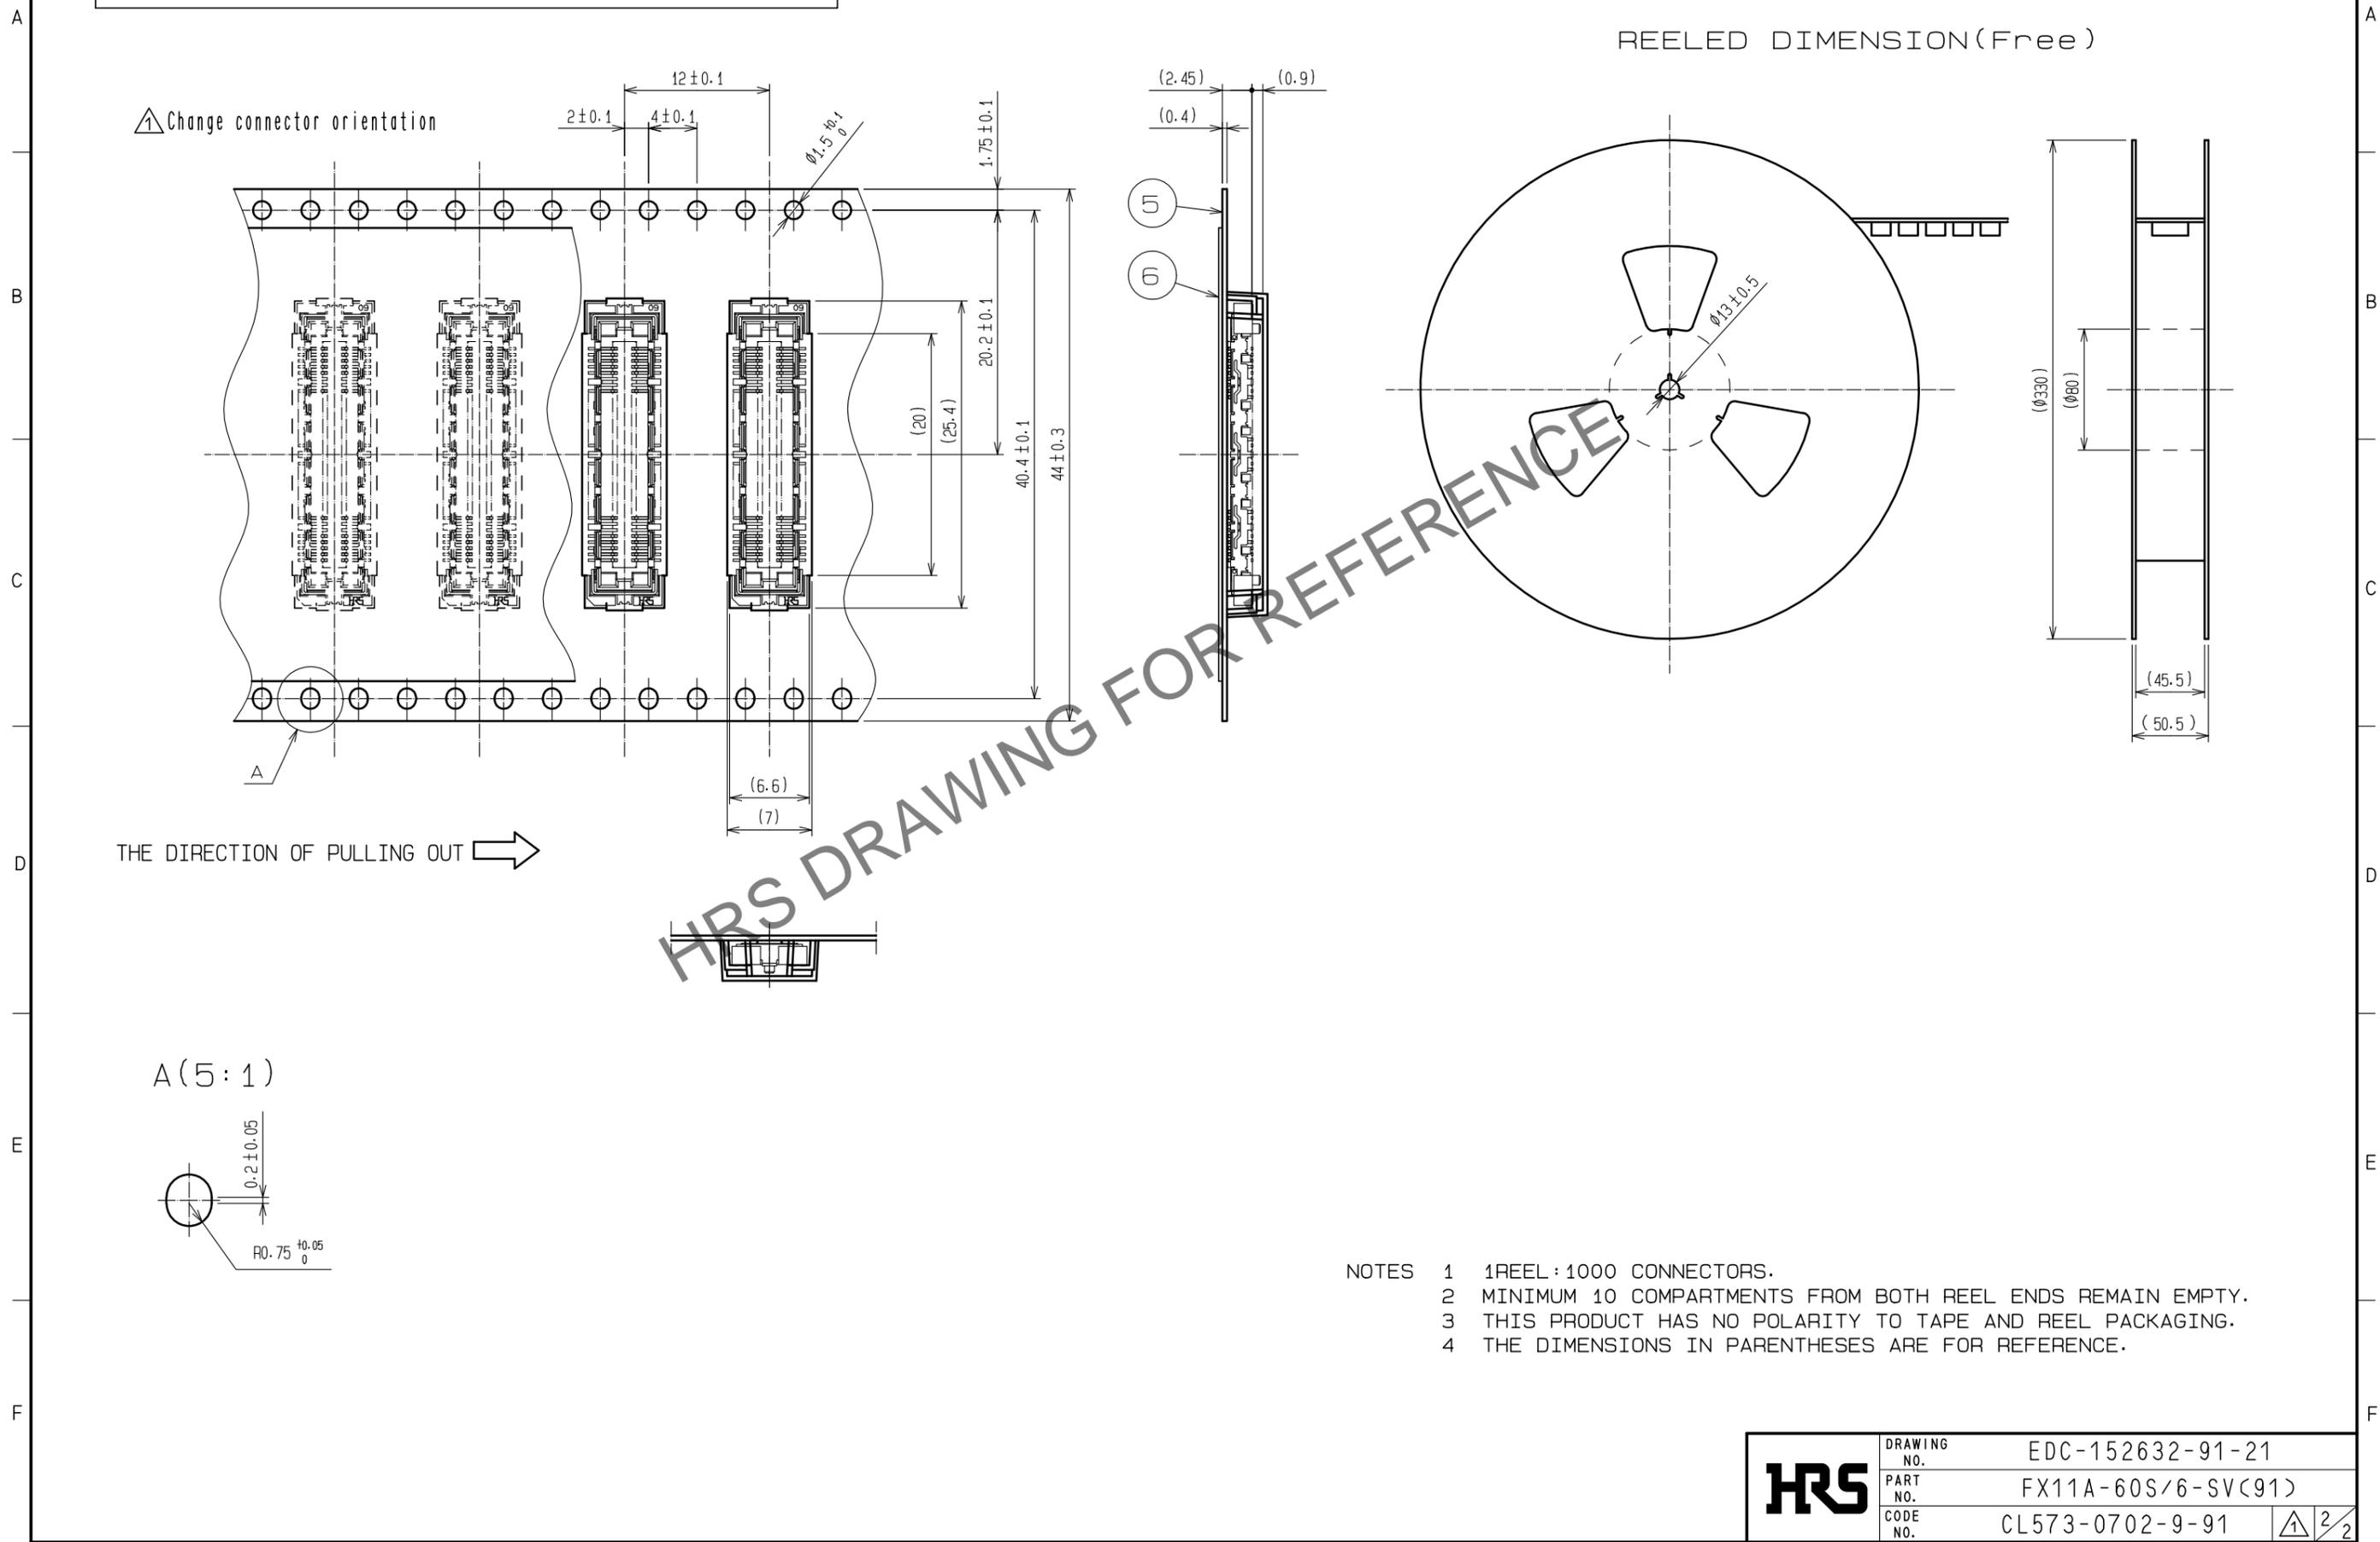

HRS	DRAWING NO.	EDC-152632-91-21
	PART NO.	FX11A-60S/6-SV(91)
	CODE NO.	CL573-0702-9-91
		2/2