




Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

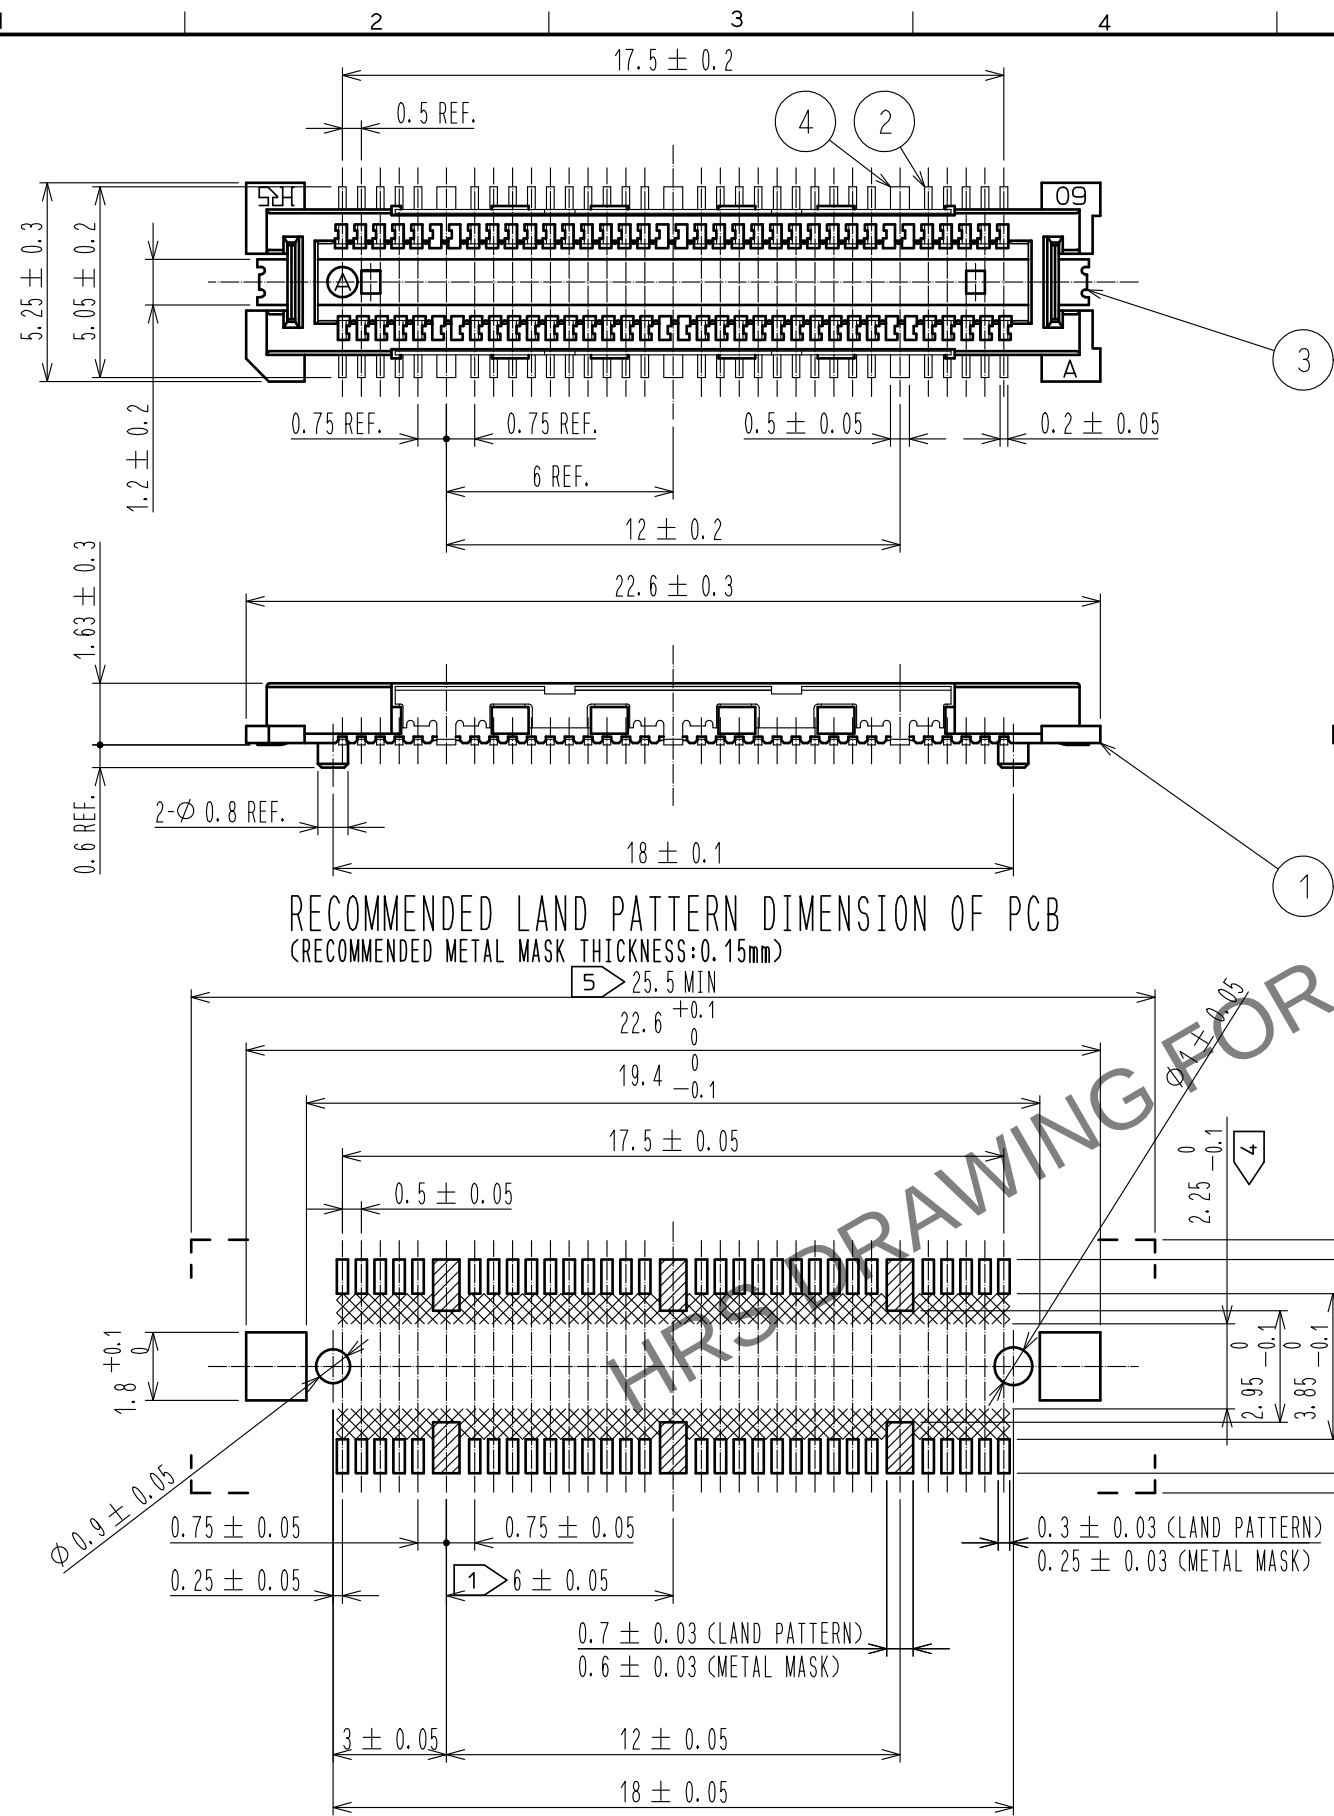

SIGNAL PORTION CROSS SECTION (10:1)

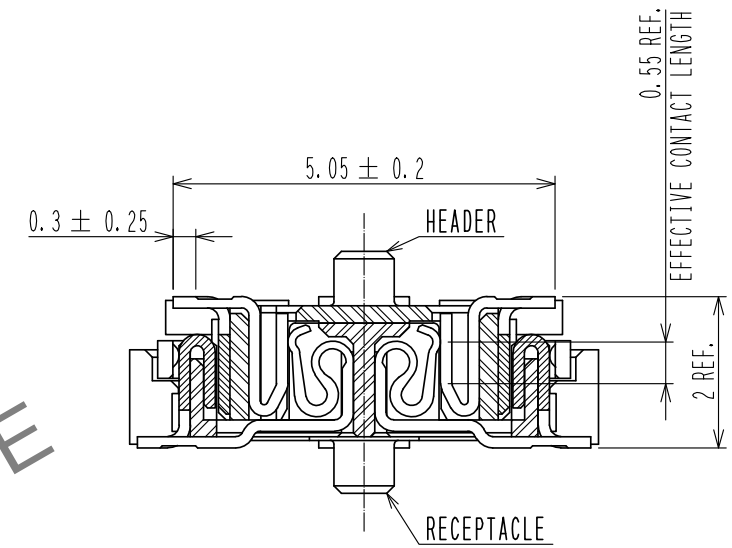


GROUND PORTION CROSS SECTION (10:1)

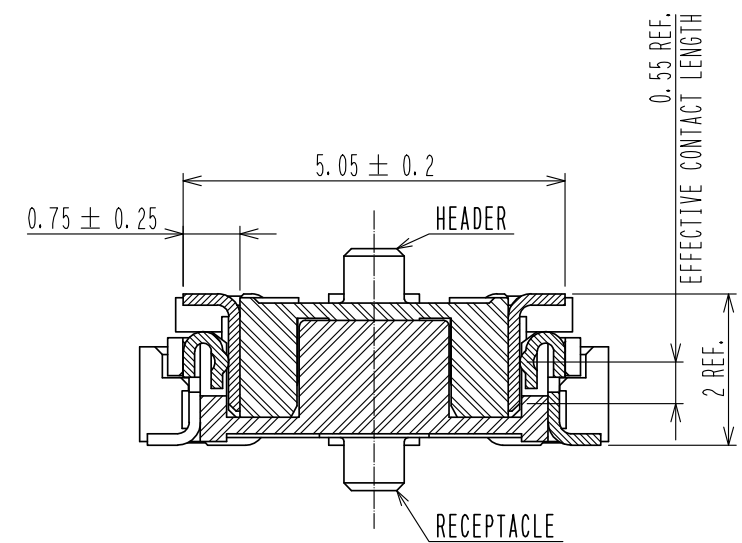

- NOTE
- 1 > 6 HATCHED PARTS: GROUND CIRCUIT.
 2. SMT LEAD-COPLANARITY: 0.1 MAX.
 3. THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 4 > MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN.
(THIS APPLIES TO HATCHED AREA.)
 - 5 > DO NOT MOUNT OTHER DEVICES ONTO AREA, OR MATING PAIR CANNOT BE MATED.
 6. TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.


			7	POLYIMIDE	TAPE FOR VACUUM PICKUP
			6	POLYESTER	COVER TAPE
2	COPPER ALLOY	CONTACT: GOLG PLATING 0.1μm MIN	5	POLYSTYRENE	EMBOSSED TAPE
		LEAD : GOLG PLATING 0.03μm MIN UNDER :NICKEL PLATING 1μm MIN	4	PHOSPHOR BRONZE	OVER : TIN PLATING 1μm MIN UNDER:NICKEL PLATING 1μm MIN
1	LCP	BEIGE, UL94V-0	3	PHOSPHOR BRONZE	TIN REFLOW PLATING 1μm MIN
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		5:1						


 HIROSE ELECTRIC CO., LTD.	APPROVED	: NH. NAKATA	16. 11. 25	DRAWING NO.	EDC-152092-92-00		
	CHECKED	: HT. YAMAGUCHI	16. 11. 25	PART NO.	FX11LA-60P/6-SV(92)		
	DESIGNED	: MT. ITANO	16. 11. 25	CODE NO.	CL573-0002-7-92		
	DRAWN	: MT. ITANO	16. 11. 25	 1/2			

DRAWING FOR PACKING(2:1)


THE DIRECTION OF PULLING OUT →

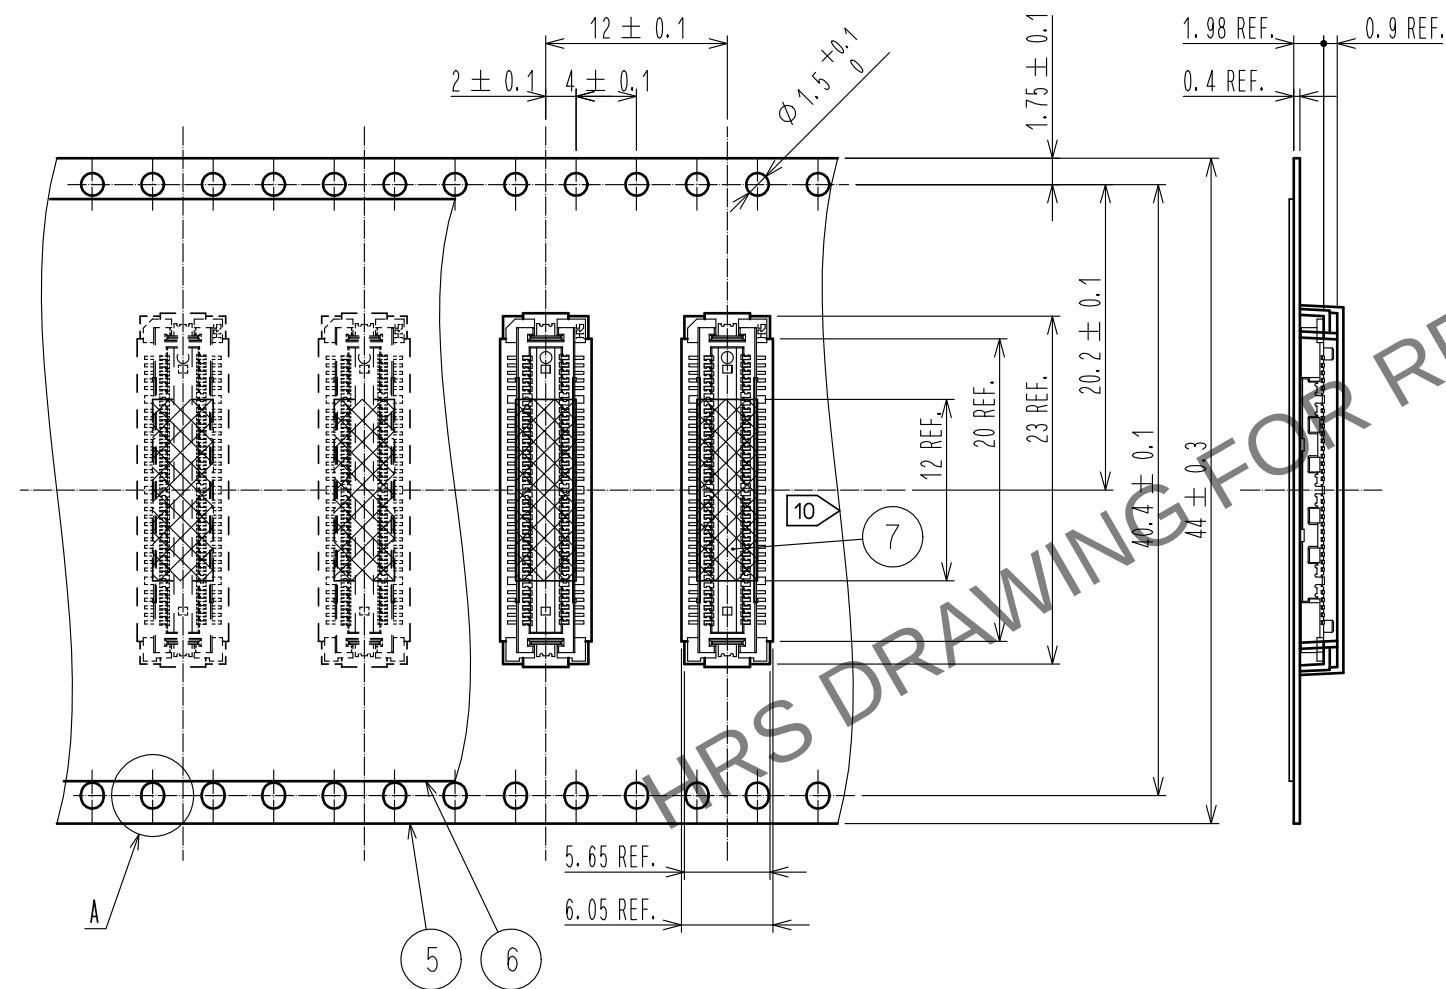

REELED DIMENSION(FREE)

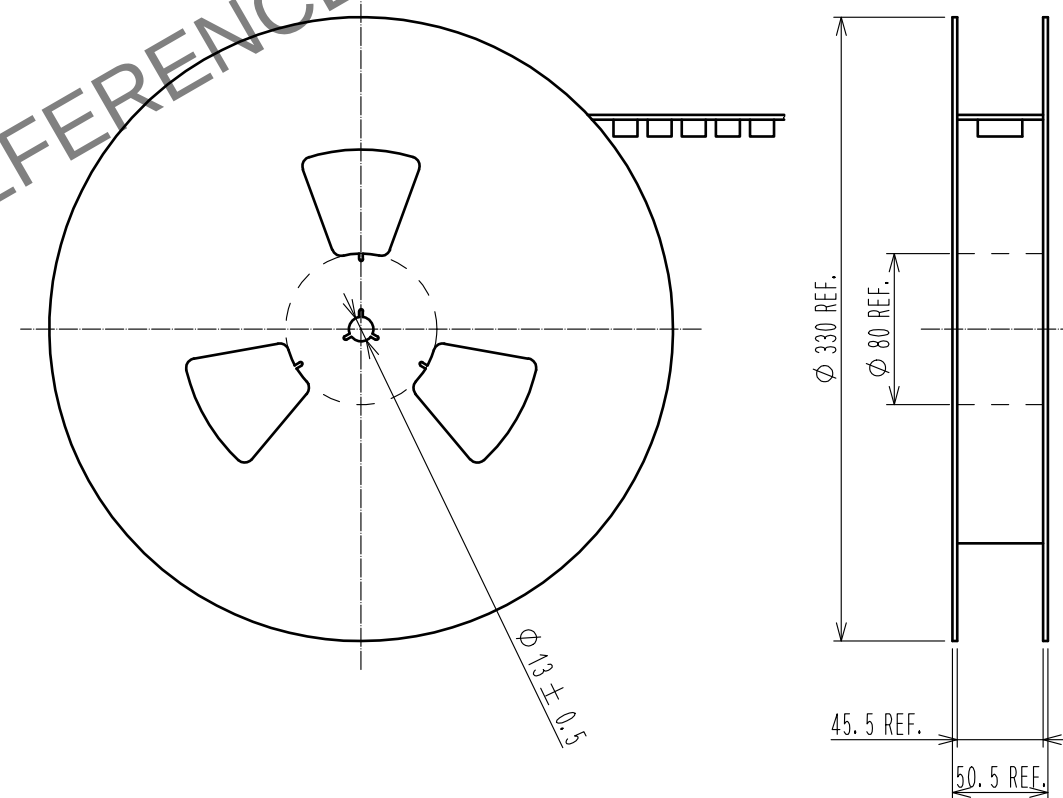

DETAIL FOR VACUUM PICKUP (5:1)



NOTE

- 1REEL:1000 CONNECTORS.
- MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
- THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.
- REMOVE THE VACUUM PICKUP TAPE AFTER MOUNTING THE CONNECTOR.

HRS

DRAWING NO.	EDC-152092-92-00
PART NO.	FX11LA-60P/6-SV(92)
CODE NO.	CL573-0002-7-92

2/2